

DTF2-2RQ9-RH

FED. MFR. CODE 91929

SWITCH-ENCLOSED

(M)DTF2-2RQ9

REPLACES

RELEASE NO. CO 9600

DTF2-2RQ9-RH

DRAWING
NUMBER

ISSUE	1	2	14
3	4	5	6

REVISIONS

A	CO 9600
M. B. F.	
9	FEB 59
B	CORR
K F M	
27	FEB 59
C	CO46119
WJM	
5	JUN 79
D	CO
46992-C	
CJH	
9	OCT 80
E	CO
51000-C	
18	OCT 83
F	CO59456
T A D	
13	MAY 86
G	CO54997
WJK	
9	JULY 86
H	CO71134
TSM	
27	SEP 91
J	CO072788
G J W	
14	SEP 92
K	0018962
VKR	
14FEB06	

CHECK

BP

CHECK

५२

36

2

3


CHECK

5

39

38

50-50378

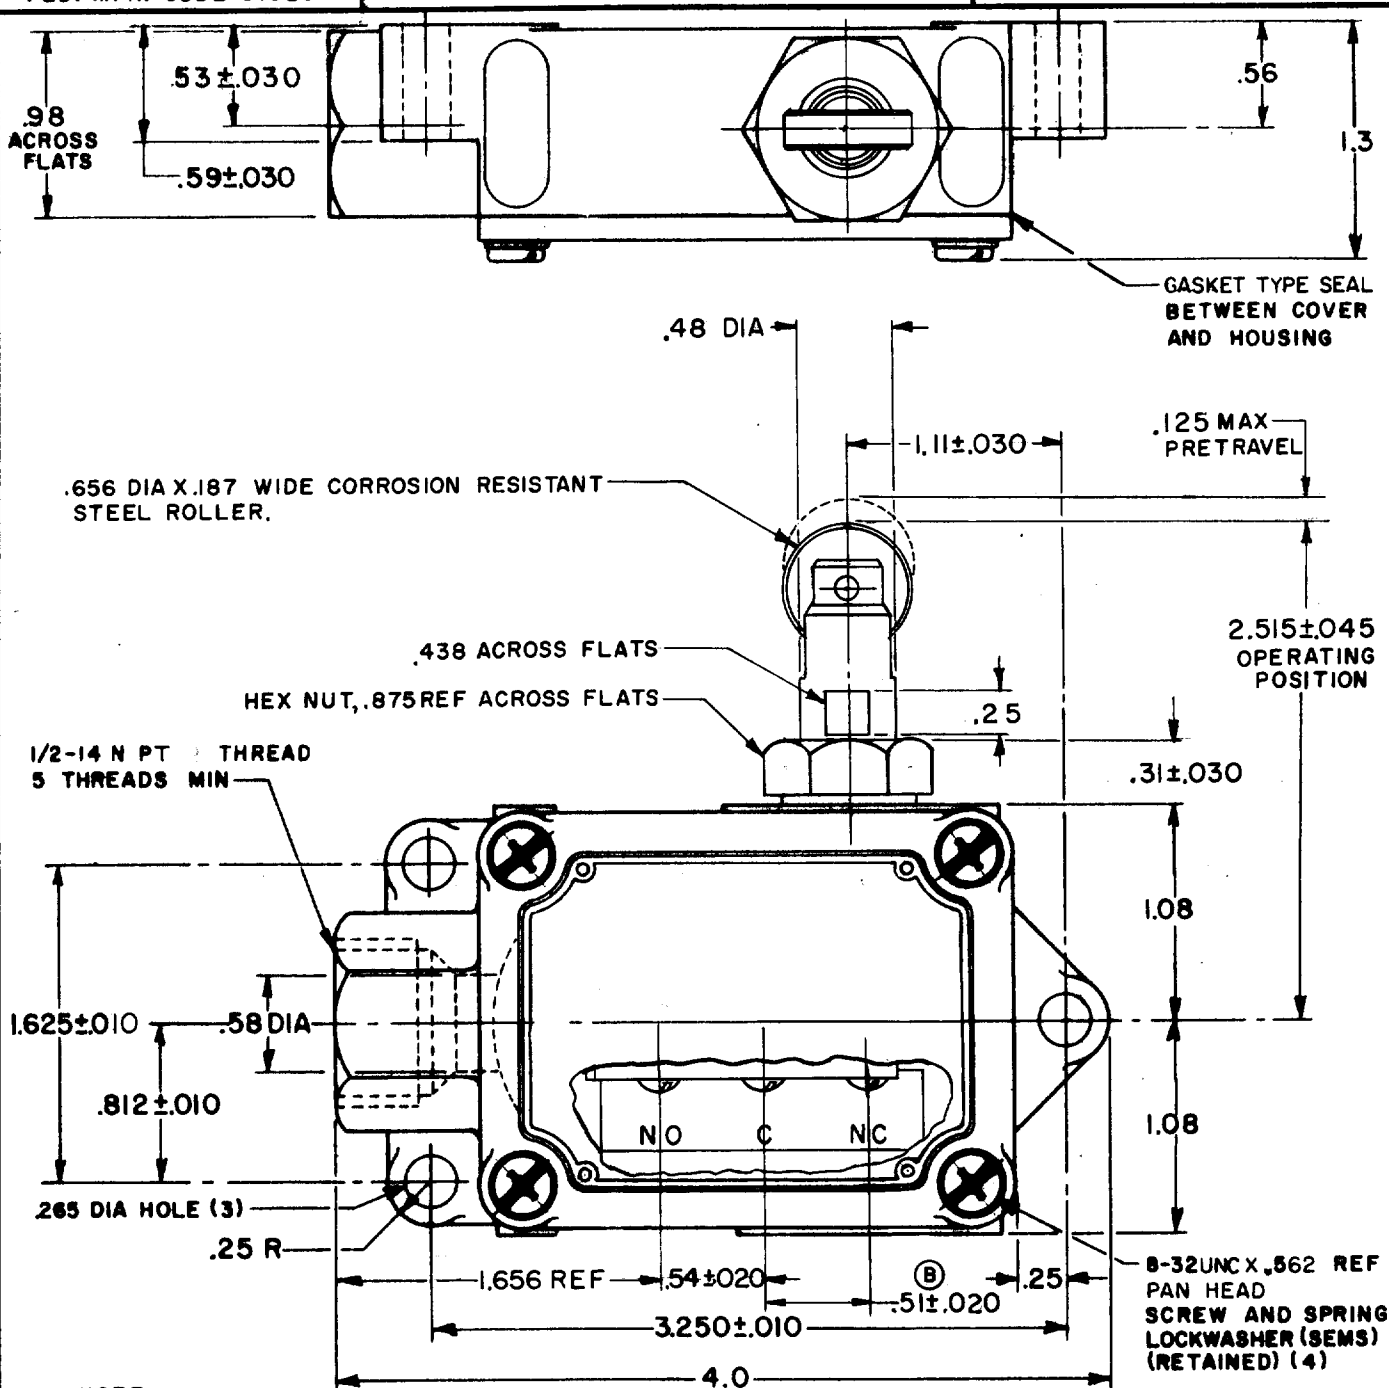

NOTE -

1 - 4-40 NC X .125 REF ROUND HEAD TERMINAL SCREW AND LOCKWASHER (6)
2 - ROLLER PLUNGER ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA		SCALE FULL
OPERATING FORCE----- 2 1/2 LB MAX	CONTACT ARRANGEMENT D P D T	BREAK DISTANCE .020 MIN	DO NOT SCALE PRINT
RELEASE FORCE-----1/4 LB MIN	-L59- 10A-125 OR 250 VAC 0.3A-125 VDC, 0.15A 250 VDC.  RJ		UNLESS OTHERWISE SPECIFIED
DIFFERENTIAL TRAVEL-----,060 MAX			DIMENSIONS ARE IN INCHES
OVERTRAVEL-----,125 MIN			TOLERANCES ARE:
SWITCH-BASIC REPLACEMENT-DT-2R3-A7			ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
			WEIGHT