


(M)DTF2-2RQN8-LH
 ISSUE 1
 RELEASE NO. SR 11483
 DRAWING NUMBER 338
 ISSUE 338
 REVISIONS
 A SR11483
 14 FEB 64
 B CO 46992-C
 7 OCT 80
 C CO 51000-C
 18 OCT 83
 D C054997
 10 NOV 84
 E C072788
 14 SEP 92
 F CO 76967
 3 NOV 93
 L S D 15 MAY 61
 DRAWN
 FO-80378-003

MICRO SWITCH
A DIVISION OF MINNEAPOLIS HONEYWELL REGULATOR COMPANY
 FREEPORT, ILLINOIS

SWITCH - ENCLOSED

CATALOG LISTING
DTF2-2RQN8-LH
 (LEFT HAND)

FED. MFR. CODE 91929

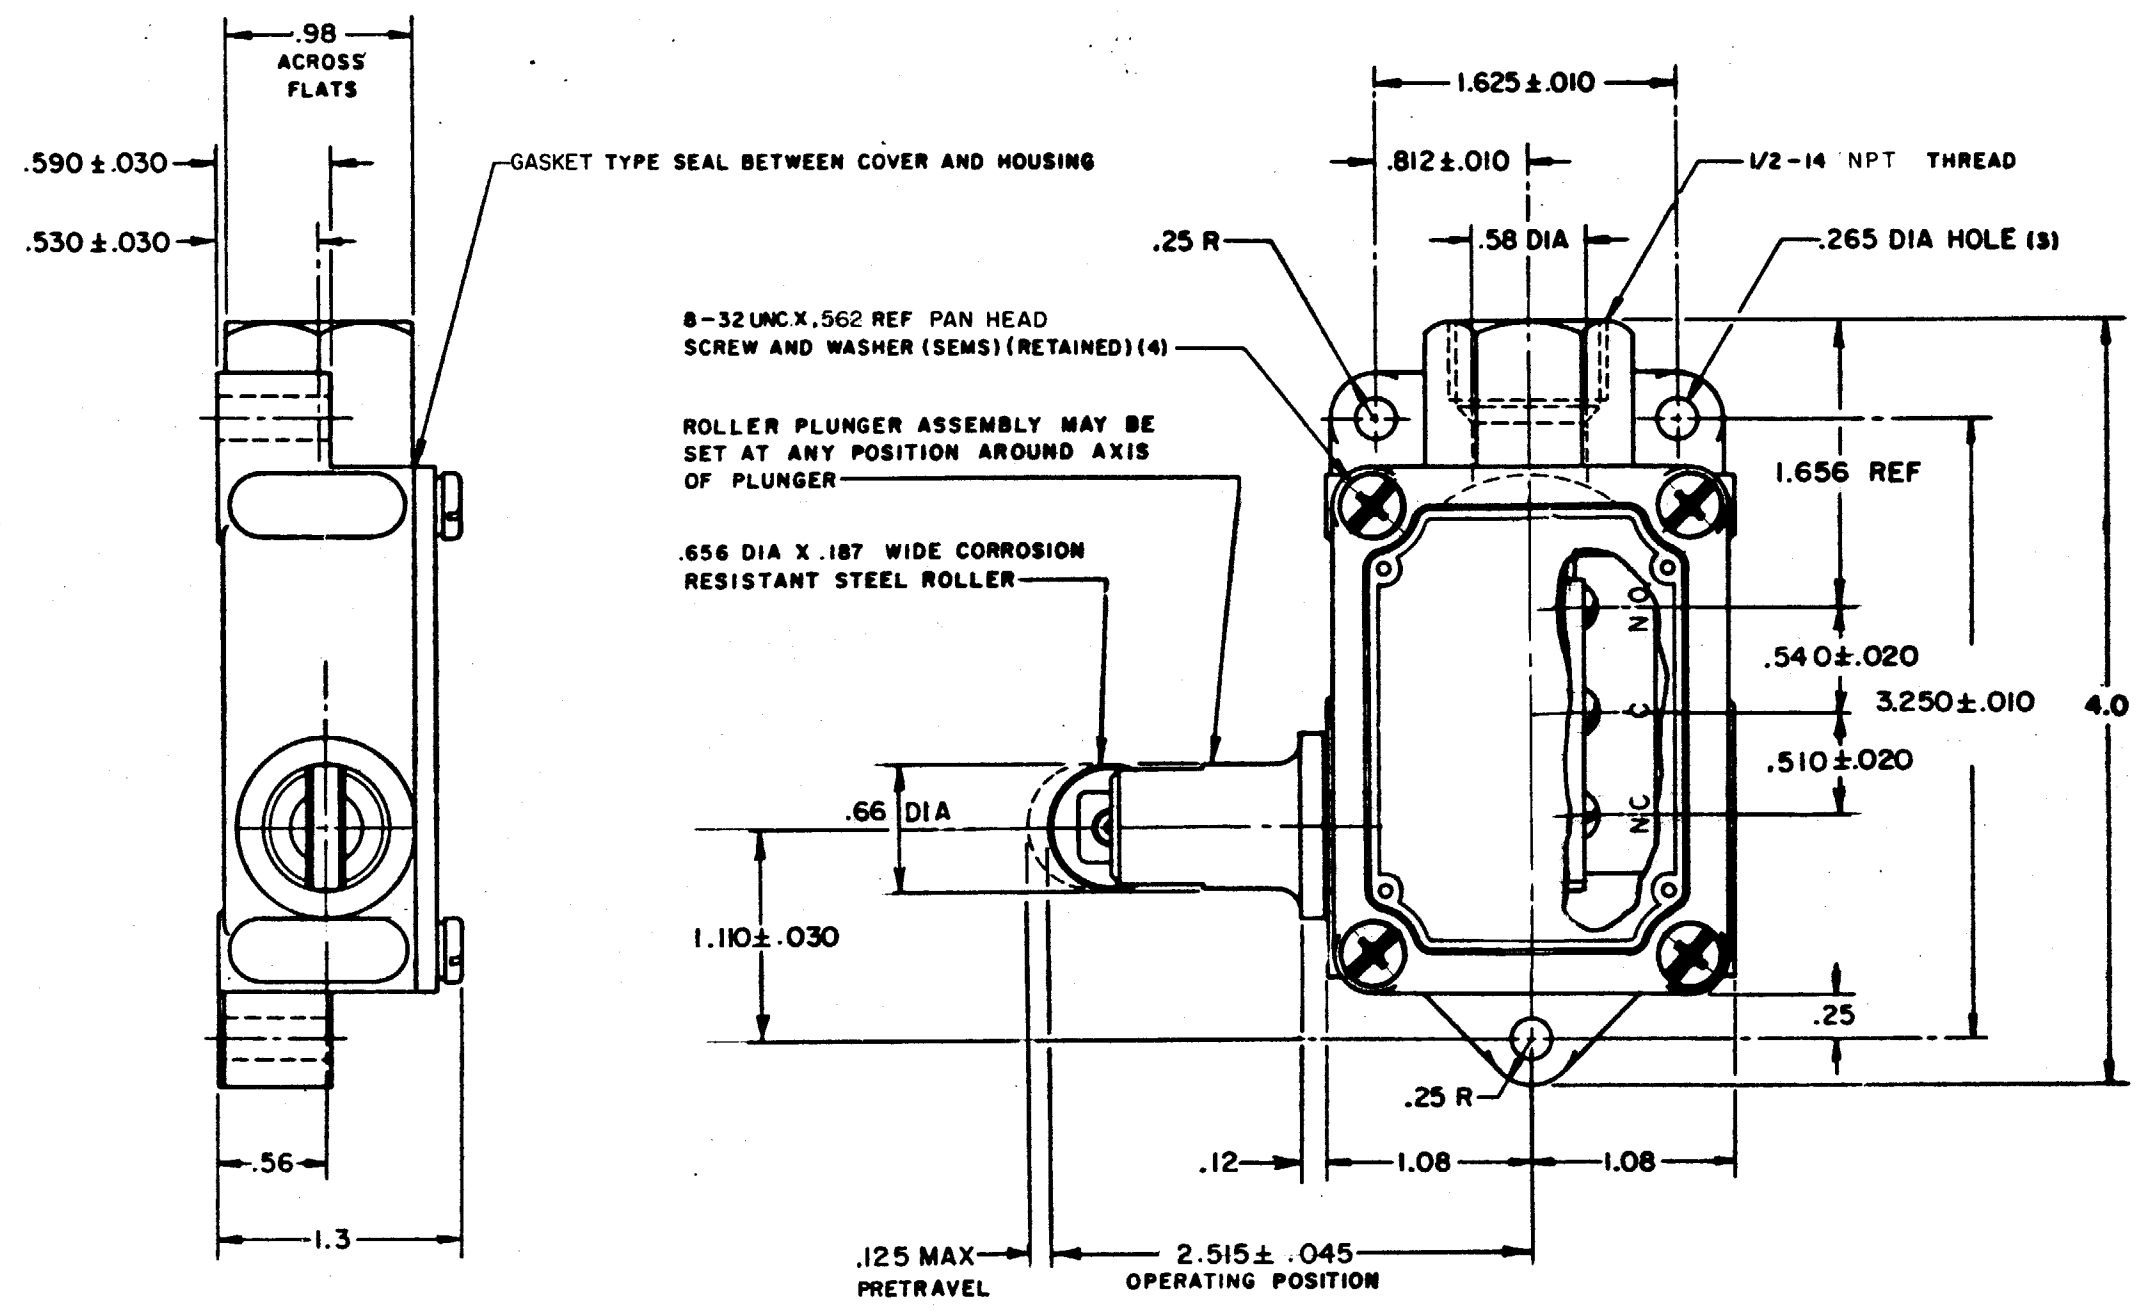

NOTE -
 1 - 4-40UNC X .125 REF ROUND HEAD TERMINAL SCREW AND LOCKWASHER (6)
 2 - IT IS ESSENTIAL TO PREVENT ENTRANCE OF HARMFUL AGENTS THRU THE CONDUIT OPENINGS TO OBTAIN FULL BENEFITS OF THE WATERPROOF CONSTRUCTION PROVIDED IN THIS UNIT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.				
CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL
OPERATING FORCE-----8 LB MAX		CONTACT ARRANGEMENT D P D T		DO NOT SCALE PRINT
RELEASE FORCE-----1 1/2 LB MIN		-L59-10 A-125 OR 250 VAC 0.3 A-125 VDC; 0.15 A-250 VDC  AL		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE
DIFFERENTIAL TRAVEL-----.060 MAX				ONE PLACE (.0)2.030
OVERTRAVEL-----.125 MIN				TWO PLACE (.00)2.018
SWITCH BASIC REPLACEMENT---DT-2R-A7				THREE PLACE (.000)2.004
				ANGLES2
				WEIGHT