

DT2-2RQ8-RH
 DRAWING NUMBER
 8
 ISSUE
 1
 REVISIONS
 A SR11483
 N B F
 14 FEB 84
 B CO
 46992-C
 C JH
 7 OCT 80
 C 51000-C
 18 OCT 83
 D CO
 54997-E
 T A
 30 JAN 85
 E CO72788
 G J W
 14 SEP 92
 F CO
 76967
 J D B
 2 NOV 93
 L S D 16 MAY 61
 FO-50178-0-32

MICRO SWITCH

A DIVISION OF MINNEAPOLIS HONEYWELL REGULATOR COMPANY

PREPARED, MINNEAPOLIS


FED. MFR. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING

DTF2-2RQN8-RH

(RIGHT HAND)

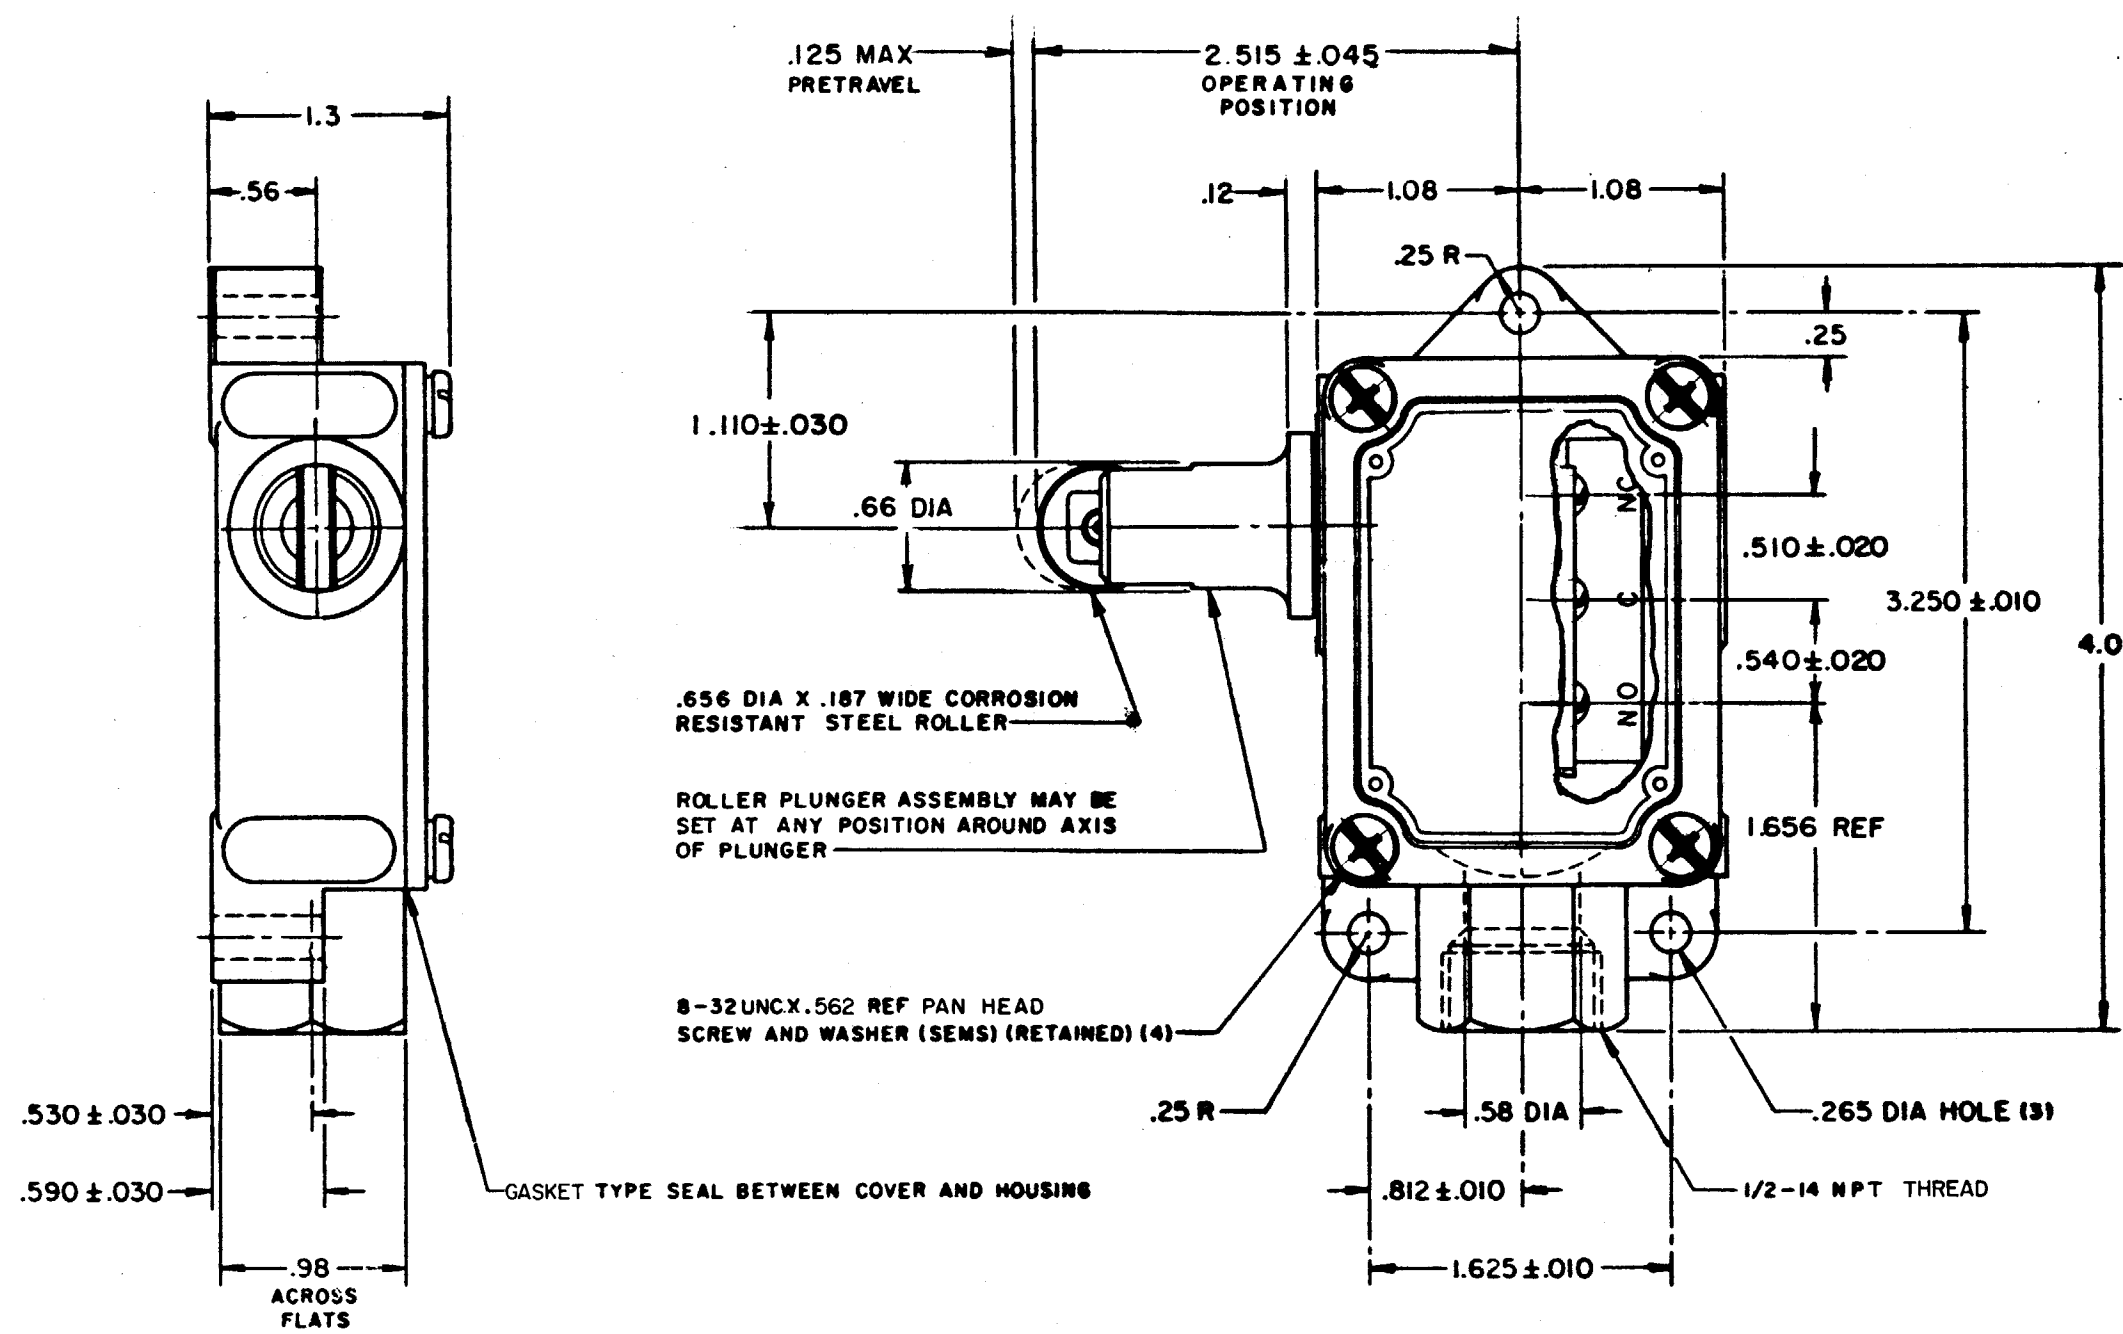

NOTE -
 1-4-40UNCX.125 REF ROUND HEAD TERMINAL SCREW AND LOCKWASHER (6)
 2-IT IS ESSENTIAL TO PREVENT ENTRANCE OF HARMFUL AGENTS THRU THE CONDUIT OPENINGS TO OBTAIN FULL BENEFIT OF THE WATERPROOF CONSTRUCTION PROVIDED IN THIS UNIT

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.				
CHARACTERISTICS		ELECTRICAL DATA		SCALE FULL
OPERATING FORCE — — — — — 8 LB MAX		CONTACT ARRANGEMENT D P D T		DO NOT SCALE PRINT
RELEASE FORCE — — — — — 1 1/2 LB MIN		-L59- 10 A-125 OR <u>250</u> VAC 0.3 A-125 VDC; 0.15 A-250 VDC  RL		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
DIFFERENTIAL TRAVEL — — — — — .060 MAX				TOLERANCES ARE:
OVERTRAVEL — — — — — .125 MIN				ONE PLACE (.0) 2.030
SWITCH BASIC REPLACEMENT — — DT-2R-A7				TWO PLACE (.00) 2.015
				THREE PLACE (.000) 2.005
				ANGLES 2
				WEIGHT