


HONEYWELL
PART NUMBER

DTV6-2RN4

REV	DOCUMENT	CHANGED BY	CHECK
11	0081896	NMN 21SEP11	CMH

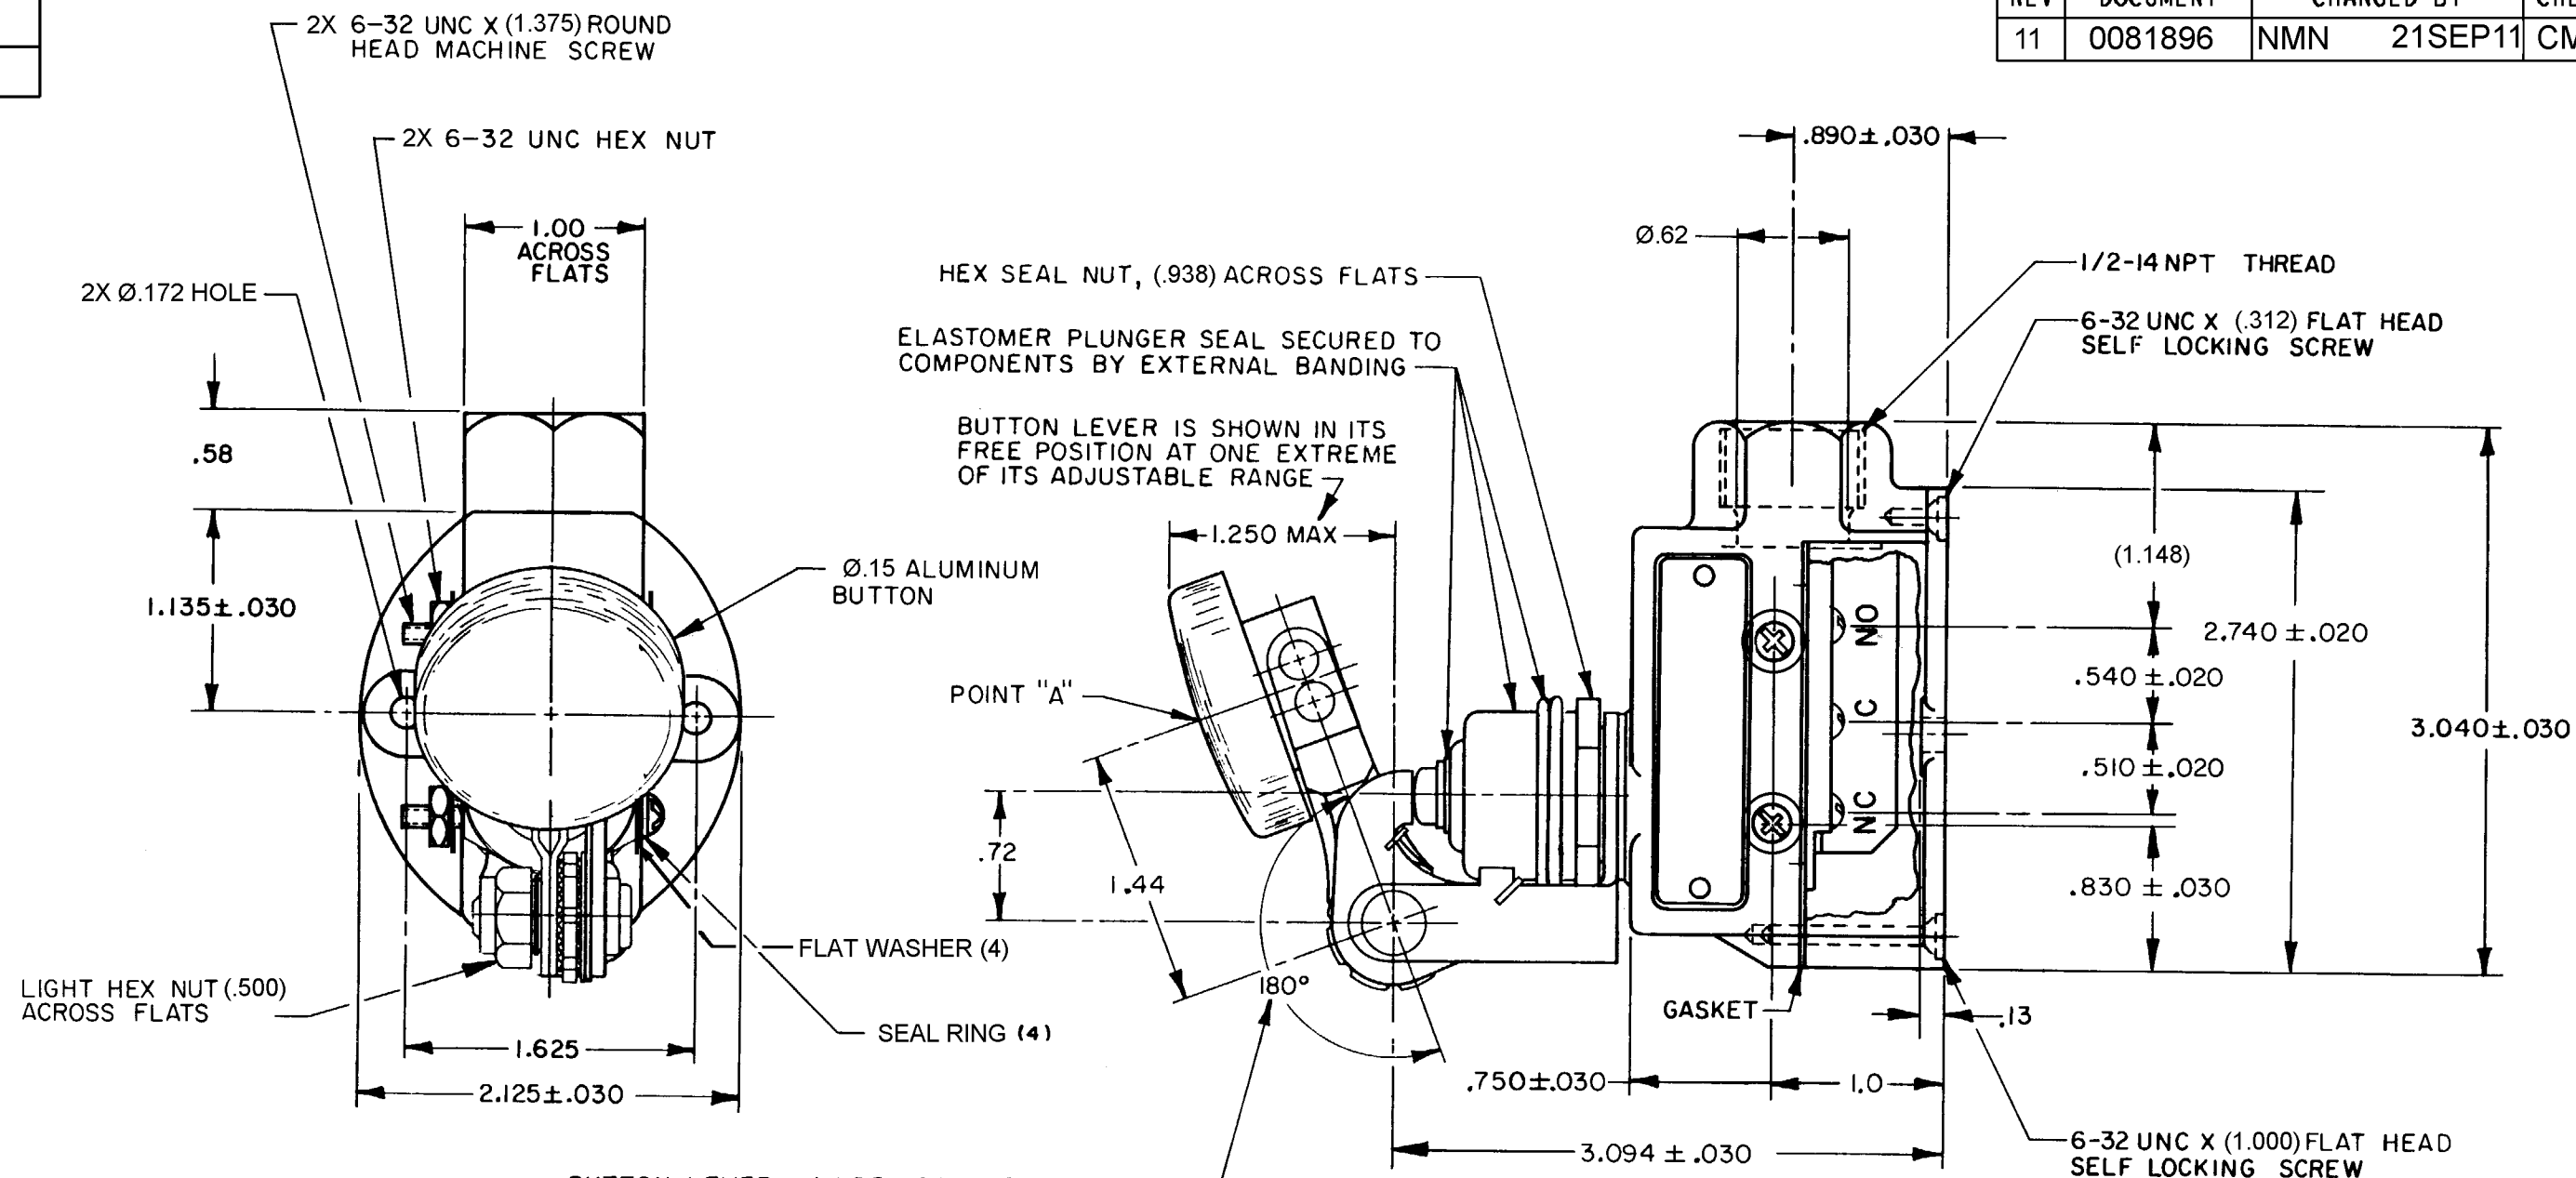

NOTES

- 1 - 6X 4-40 UNC X (.125) TERMINAL SCREW AND LOCK WASHER
- 2 - BUTTON LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
- 3 - SEALED FOR NEMA 1, 3, 4 AND IP 66 RATING

BUTTON LEVER MAY BE POSITIVELY LOCKED AT INTERVALS OF APPROXIMATELY 0.2° WITHIN A RANGE OF 180° (990 POSITIONS)

RELEASE NO: PR-11266

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH			DRAWN	JAP	16JUN82		Honeywell					
OPERATING FORCE----- 10-30 OZ		CONTACT ARRANGEMENT		TOLERANCES UNLESS NOTED:			CHECK	GCH	18JUN82							
RELEASE FORCE----- 6 OZ MIN		S P D T		NO PLACES X ±			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE						
PRETRAVEL ----- .266 MAX		CODE L59 10A - 125 OR 250VAC		ONE PLACE .X ± .030												
DIFFERENTIAL TRAVEL----- .165 MAX		0.3A - 125 VDC; 0.15A - 250 VDC		TWO PLACE .XX ± .015												
OVERTRAVEL----- .219 MIN				THREE PLACE .XXX ± .005												
SWITC-BASIC REPLACEMENT----- DT-2R3-A7				ANGLES X ± 0°												
				THIRD ANGLE PROJECTION			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE TYPE CAGE CODE DRAWING NAME REV						
							RASTER									B I - DTV6-2RN4 11
										SCALE NONE SHEET I OF I						