


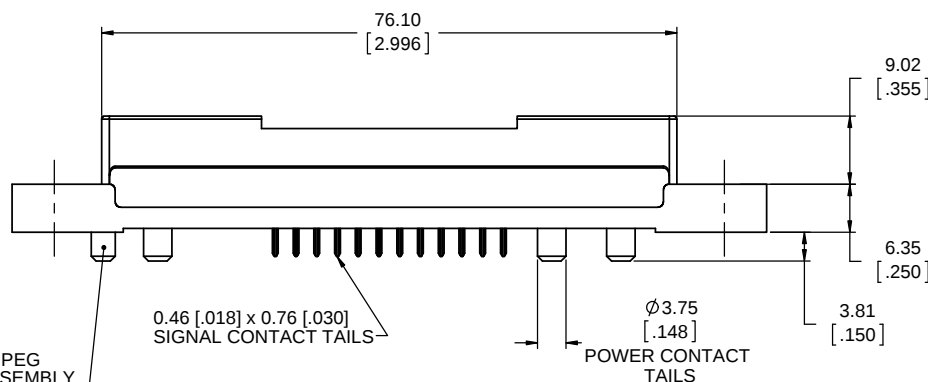
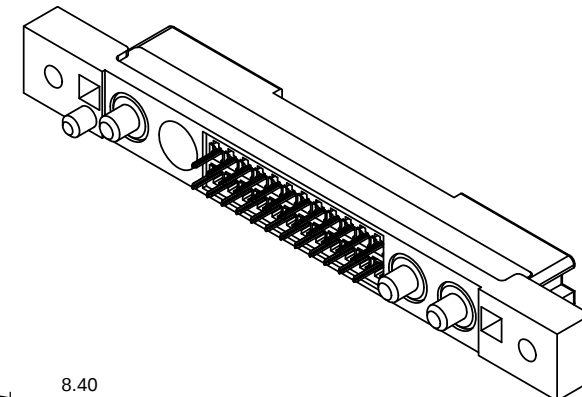


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL DRAWING (EAR 14107)	AUG01/12	K.L.

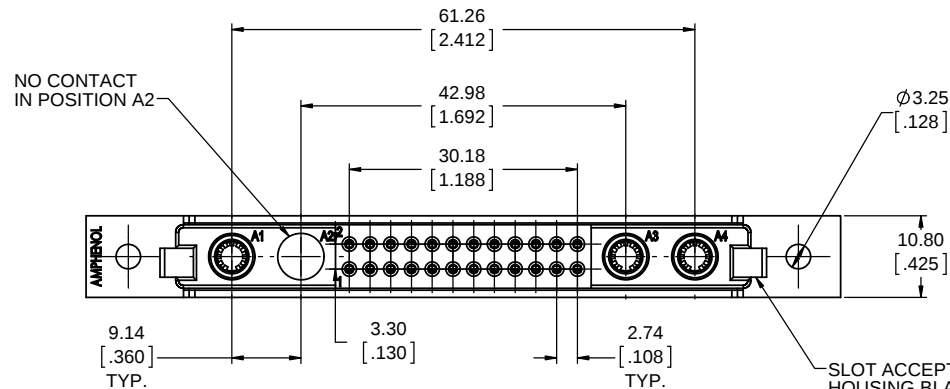

- NOTES:
- MATERIALS: ALL MATERIALS ARE RoHS COMPLIANT PER EU DIRECTIVE 2002/95/EC AND AMENDMENTS.
 - HOUSING: HIGH TEMPERATURE RESISTANT NYLON, UL FLAMMABILITY RATING 94V-0, COLOUR BLACK
 - SIGNAL CONTACTS: PHOSPHOR BRONZE PLATED WITH 0.38µm (15µ") GOLD OVER NICKEL ON THE MATING AREA AND 2.54µm (100µ") MATTE TIN OVER NICKEL ON THE TAILS.
 - POWER CONTACTS: BERYLLIUM COPPER COOLBAND MATING GRID, PLATED WITH 5.08µm (200µ") SILVER OVER 1.27µm (50µ") NICKEL. GRID HOLDER, COPPER ALLOY PLATED WITH 0.76µm (30µ") SILVER OVER 1.27µm (50µ") NICKEL.
 - WHEN MATED WITH PIN CONNECTOR P/N DWR-T424P-V236-90, THE ORDER OF MECHANICAL AND ELECTRICAL ENGAGEMENT IS A) HOUSING BLADES, B) HOUSING SHROUD, C) POWER CONTACTS, D) SIGNAL CONTACTS
 - ELECTRICAL CHARACTERISTICS
 - CURRENT RATING: 55A PER CONTACT, 5A SIGNAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 1500VDC
 - INSULATION RESISTANCE: 5000 MEGOHMS
 - OPERATING TEMPERATURE: -55C TO +105C

AMPHENOL PART NUMBER: DWR-T424S-V236-90

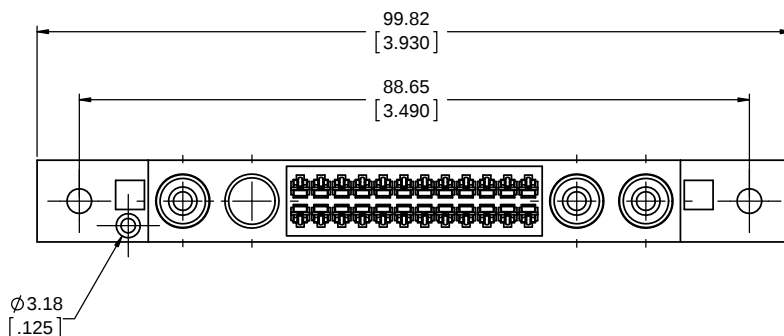

UNLESS SPECIFIED OTHERWISE		DRAWN J.VANDERWINDT	JUL31/12	Amphenol Canada Corp. www.amphenolcanada.com	
PRIMARY UNITS MILLIMETERS	CHECKED K.LAMBIE	AUG01/12			
SECONDARY INCHES	M.E. APP'D			DWR SERIES SLIM DRAWER SOCKET CONNECTOR, SIZE CB8, VERTICAL PCB TAILS POSITION A2 OMITTED, RoHS COMPLIANT	
REFERENCE IN PARENTHESES	Q.A. APP'D				
GENERAL TOLERANCES	DWG APPR.			P-DWR-T424S-V236-90	
1 DECIMAL PLACE	ENG. REL. NO. EAR 14107				
2 DECIMAL PLACES	REF.			DWG. NO. REV A	
3 DECIMAL PLACES	THIRD ANGLE PROJECTION				
ANGULAR DEGREES	DO NOT SCALE DRAWING			CODE ID NO. 03554 DWG SIZE: X SCALE: 2:1 SHEET 1 OF 2	


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

SLOT & HOLE WILL CLEAR
ORIENTATION PEG & MATING
PIN HOUSING BLADES
PLATING NOT REQUIRED


LOCATE HOLES

$\oplus 0.13$ [0.005]

POSITION DIMENSIONS
ARE BASIC

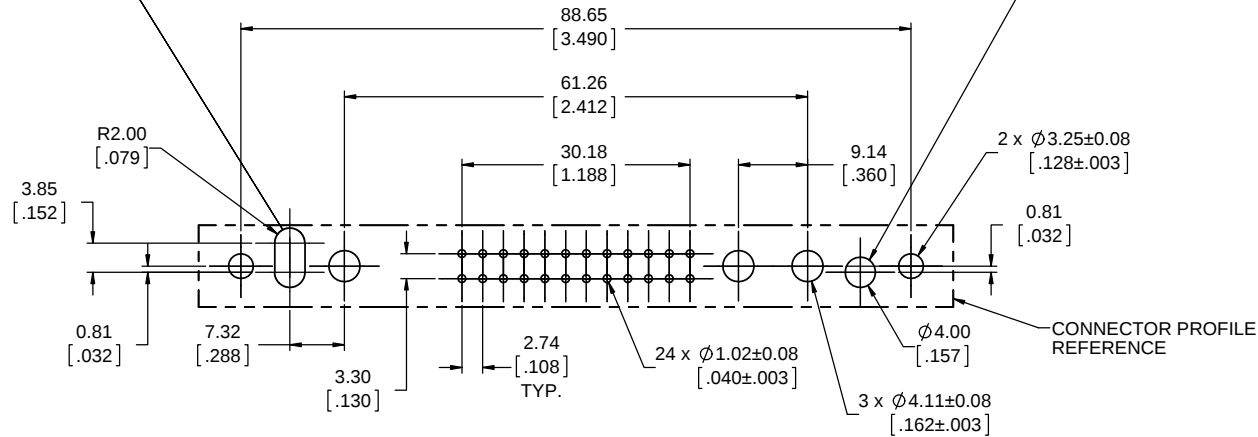

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE OF BOARD)

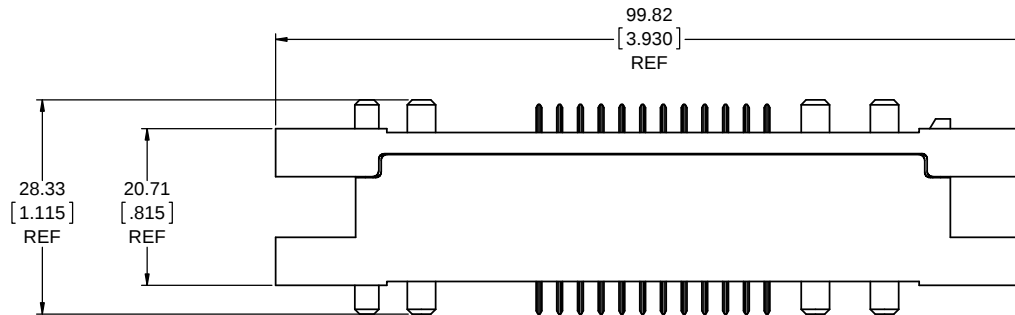

PIN AND SOCKET MATED ASSEMBLY
DWR-T424P-V236-90 AND DWR-T424S-V236-90



UNLESS SPECIFIED OTHERWISE		DRAWN J.VANDERWINDT	JUL31/12
PRIMARY UNITS MILLIMETERS	CHECKED K.LAMBIE	AUG01/12	
SECONDARY INCHES	M.E. APP'D		
REFERENCE IN PARENTHESES	Q.A. APP'D		
GENERAL TOLERANCES		DWG APPR.	
1 DECIMAL PLACE	ENG. REL. NO.	EAR 14107	
2 DECIMAL PLACES	REF.		
3 DECIMAL PLACES	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	
ANGULAR DEGREES			

Amphenol Canada Corp.			
www.amphenolcanada.com			
DWR SERIES SLIM DRAWER SOCKET CONNECTOR, SIZE CB8, VERTICAL PCB TAILS POSITION A2 OMITTED, RoHS COMPLIANT			
DWG. NO. P-DWR-T424S-V236-90			REV A
CODE ID NO. 03554	DWG SIZE: X	SCALE: 2:1	SHEET 2 OF 2