

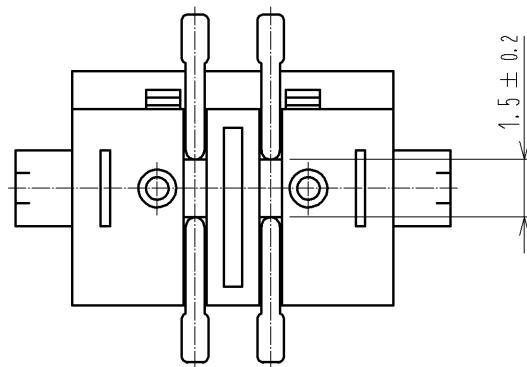
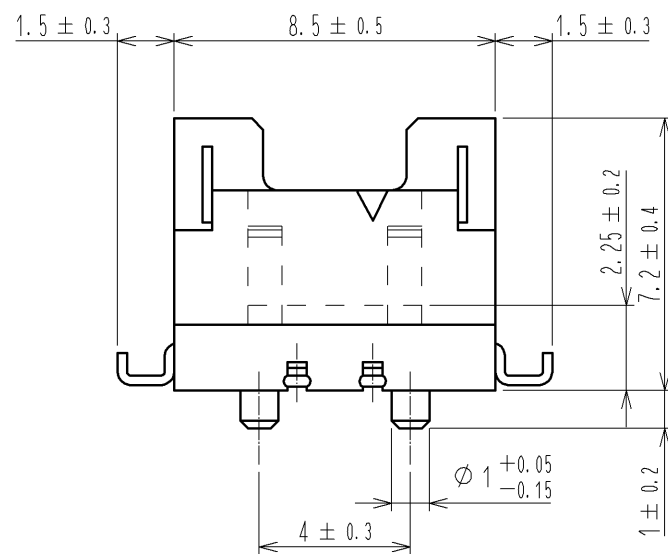
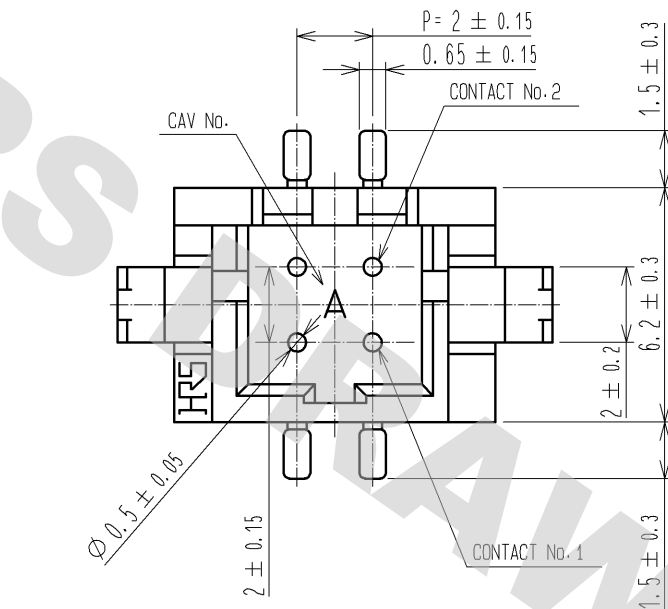



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

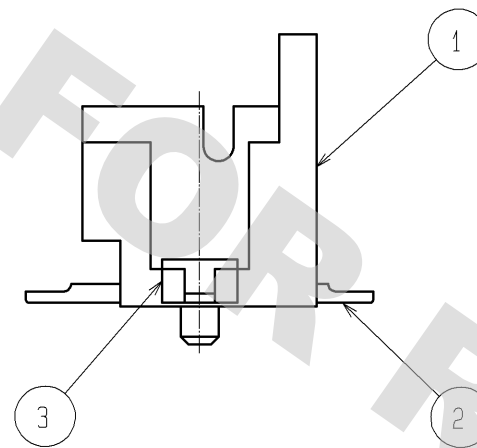


RECOMMENDED PATTERN(2:1)
(BOARD THICKNESS $t=1.6\text{mm}$)

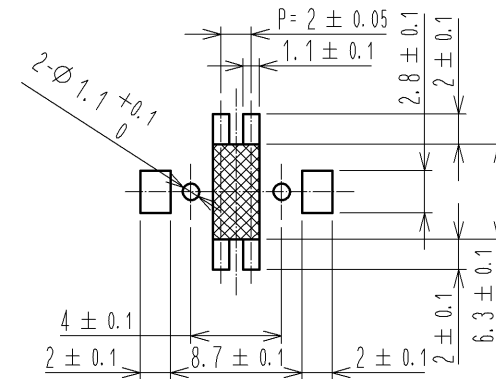




- NOTE 1 LEAD CO-PLANALITY INCLUDE REINFORCED METAL FITTING SHALL BE 0.1mmMAX.
2 WHEN A PART MARKED WITH  HAS A PATTERN AND NO RESIST ON IT, USE CARE TO PREVENT THE CONNECTOR TERMINAL FROM CONTACTING IT.

3	BRASS	SURFACE:TIN PLATED 1μm min		6	POLYESTER	CLEAR COVER TAPE			
2	BRASS	SURFACE:GOLD PLATED 0.2μm min		5	PS	EMBOSSED CARRIER TAPE CLEAR			
		UNDER PLATING:NICKEL 1μm min							
1	POLYAMIDE	BEIGE UL94V-0		4	POLYAMIDE	CAP. BLACK			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO.,LTD.	APPROVED : TS. SAKATA		08.10.20	DRAWING NO.		EDC3-081528-01			
	CHECKED : TS. KUMAZAWA		08.10.16	PART NO.		DF11-4DP-2V(57)			
	DESIGNED : KT. ISHII		08.10.01	CODE NO.		CL543-0585-5-57			
	DRAWN : KT. ISHII		08.10.01			 1/2			

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

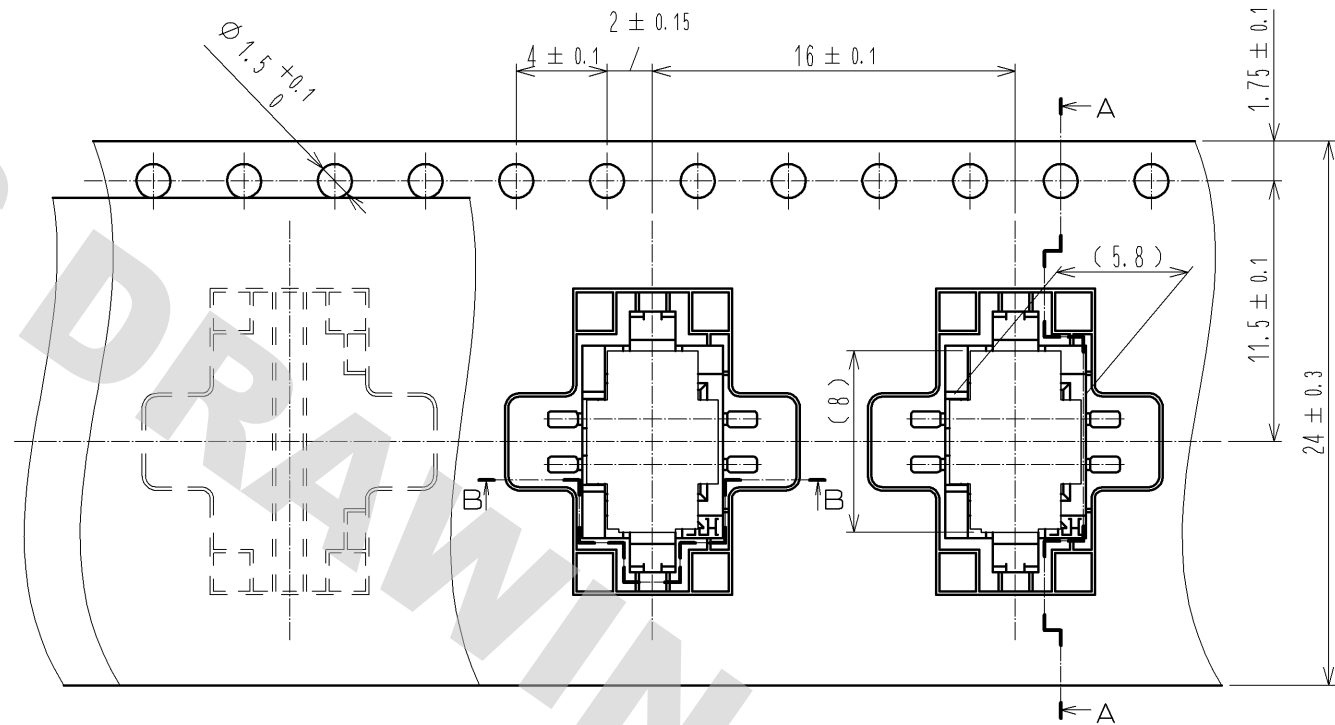

DIRECTION OF UNREELING

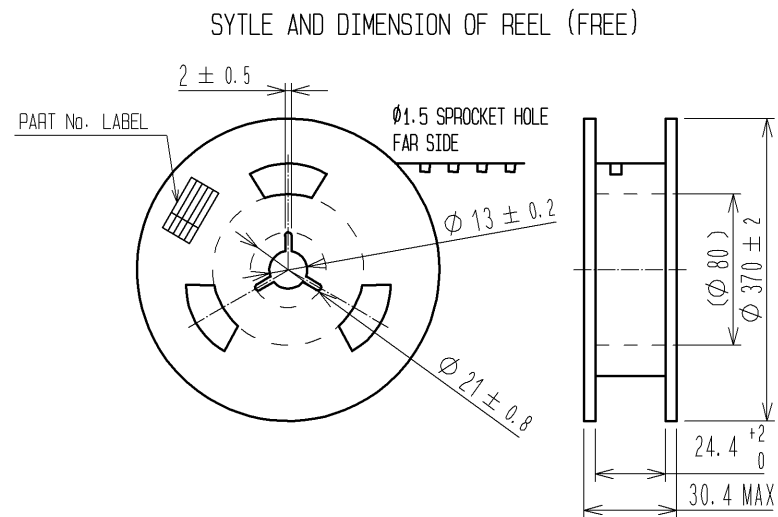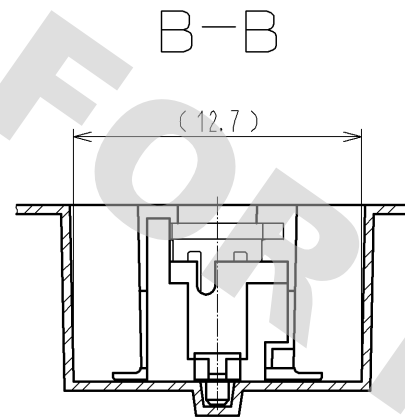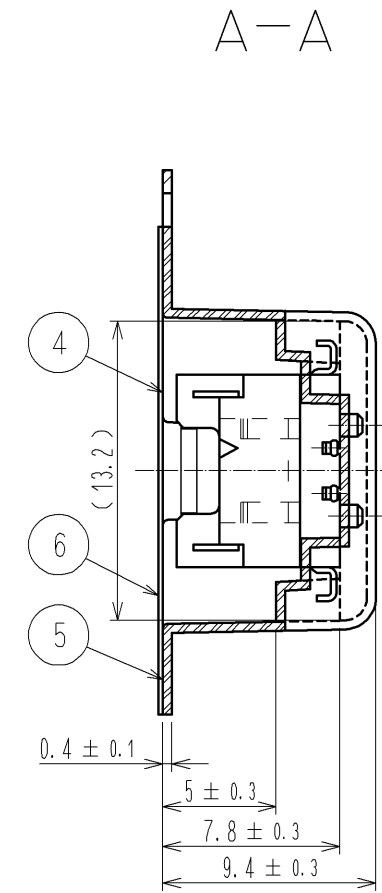

5 DETAIL OF PART No. LABEL

- SUPPLIER
- QUANTITY
- PART No.
- CODE No.
- DATE OF MANUFACTURED

生産月日	年 月 日
図番	CL543-0585-5-57
品番	DF11-4DP-2V(57)
納入数量	500ko
納入者	ヒロセ電機(株)

- NOTES
- 1 REEL:500 CONNECTORS.
 - 4 AT THE BEGINNING OF REEL, 15 COMPONENTS SHALL BE EMPTY. AT THE END OF THE REEL, 10 COMPONENTS SHALL BE EMPTY.
 - 5 DETAIL OF PART NO. LABEL IS WRITTEN IN JAPANESE.
 - 6 THE REEL IS POLYETHYLENE PACKAGED WITH A DRY AGENT INSIDE FOR MOISTURE-PROOF PACKAGING.
 - 7 FOR THE STORAGE OF 168 HOURS OR MORE AFTER OPENING THE PACKAGE, KEEP THE PRODUCTS UNDER MOISTURE PROOF CONDITIONS.
 - 8 EXCEPT ON THE MATING SURFACE, COMPONENT INFLATION DOES NOT AFFECT THE PRODUCTS PERFORMANCE.

HRS

DRAWING NO.	EDC3-081528-01
PART NO.	DF11-4DP-2V(57)
CODE NO.	CL543-0585-5-57

2/2