

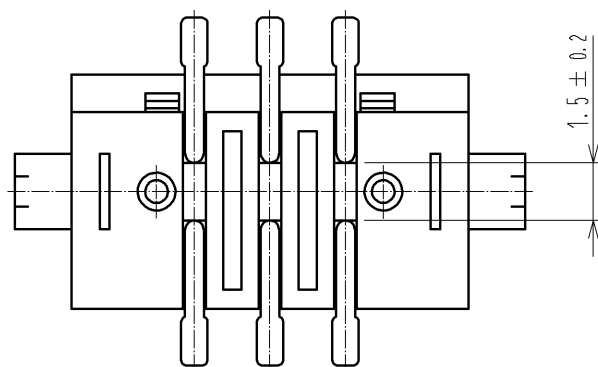
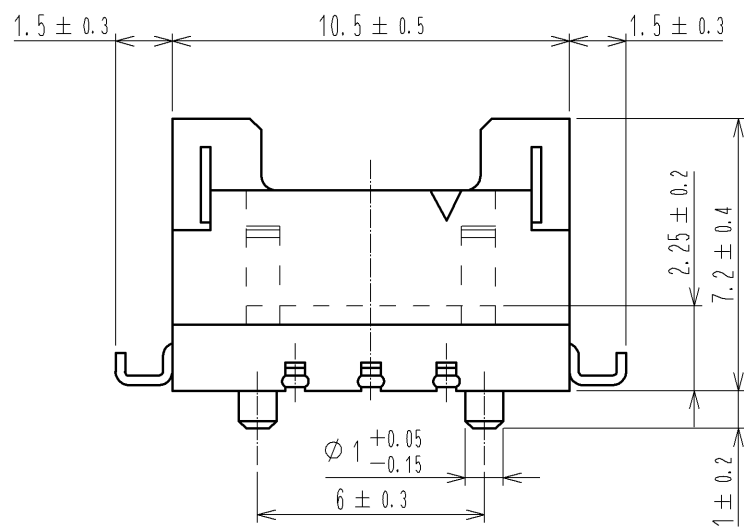
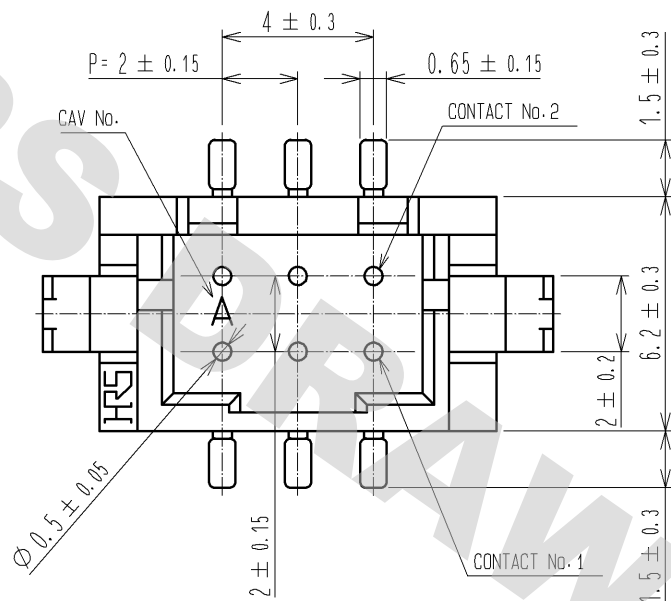


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

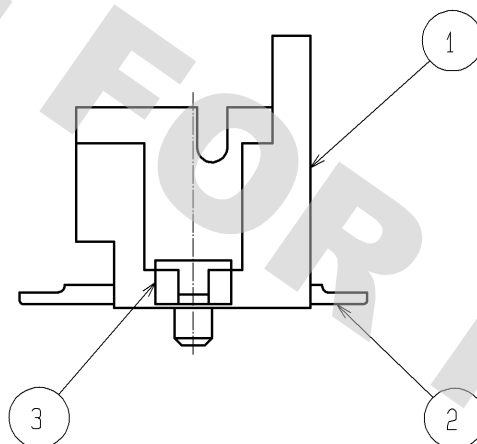

RECOMMENDED PATTERN(2:1)
(BOARD THICKNESS $t=1.6\text{mm}$)

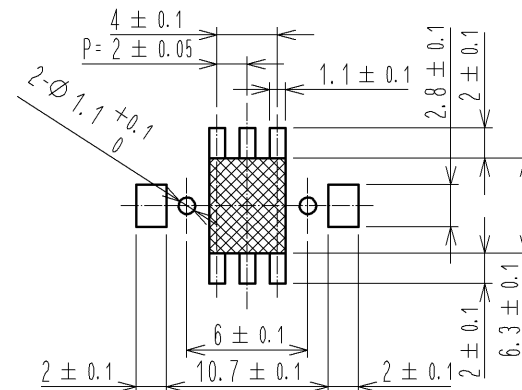


- NOTE 1 LEAD CO-PLANALITY INCLUDE REINFORCED METAL FITTING SHALL BE 0.1mmMAX.
2 WHEN A PART MARKED WITH  HAS A PATTERN AND NO RESIST ON IT, USE CARE TO PREVENT THE CONNECTOR TERMINAL FROM CONTACTING IT.




3	BRASS	SURFACE:TIN PLATED 1μm min				
2	BRASS	SURFACE:GOLD PLATED 0.2μm min		6	POLYESTER	CLEAR COVER TAPE
		UNDER PLATING:NICKEL 1μm min		5	A-PET	EMBOSSED CARRIER TAPE,CLEAR
1	POLYAMIDE	BEIGE,UL94V-0		4	POLYAMIDE	CAP, BLACK
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :TS. SAKATA		08.10.20	DRAWING NO.	EDC3-081529-01		
		CHECKED :TS. KUMAZAWA		08.10.16	PART NO.	DF11-6DP-2V(57)		
		DESIGNED :KT. ISHII		08.10.01	CODE NO.	CL543-0586-8-57		
		DRAWN :KT. ISHII		08.10.01				

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

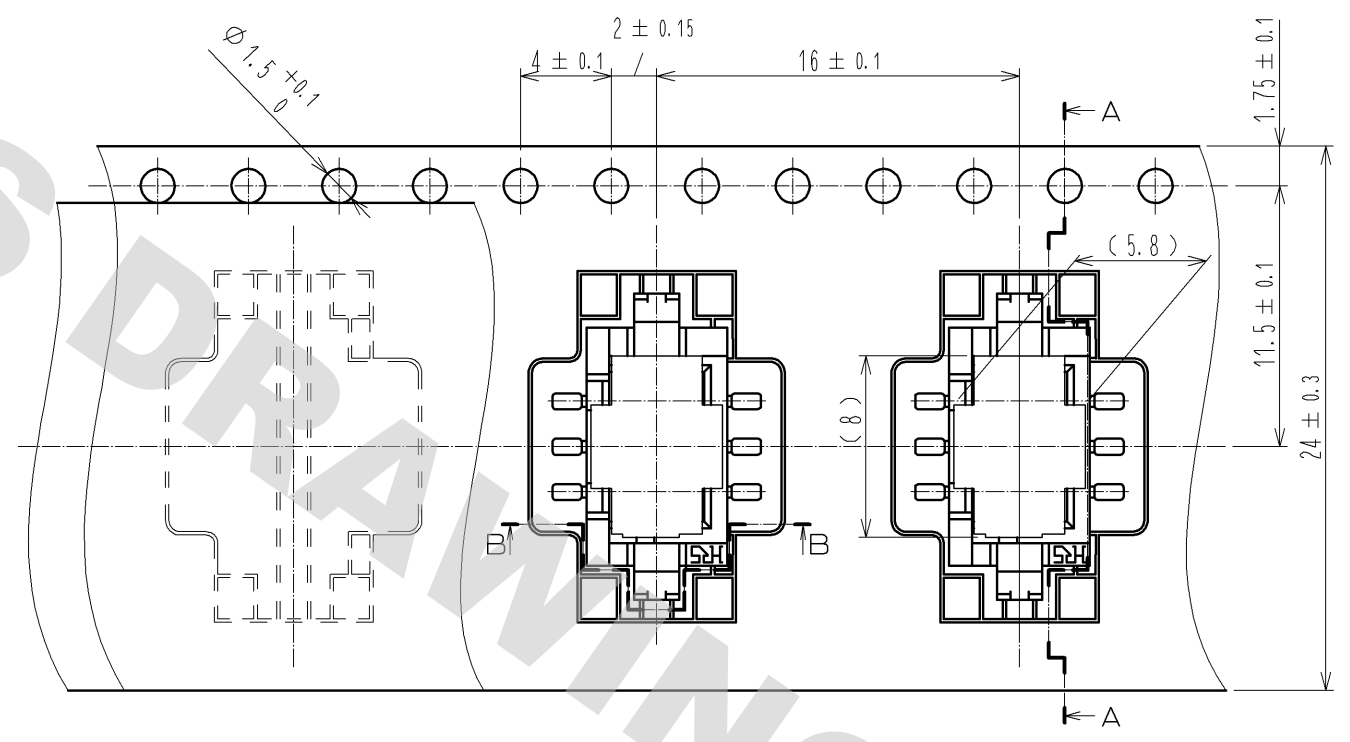

DIRECTION OF UNREELING

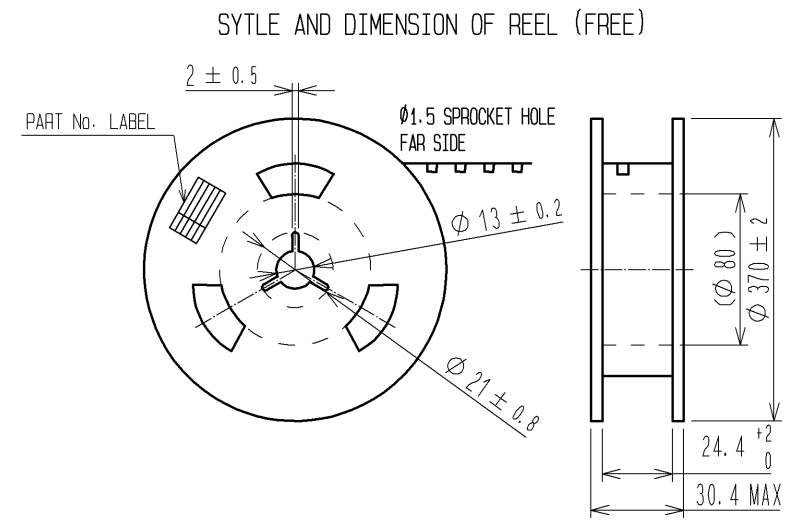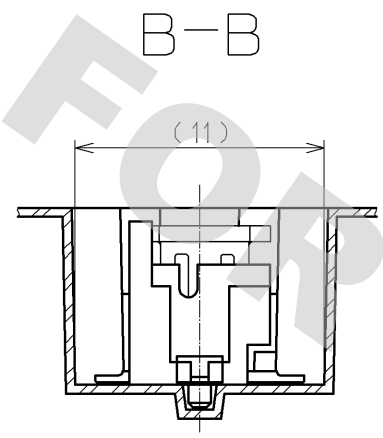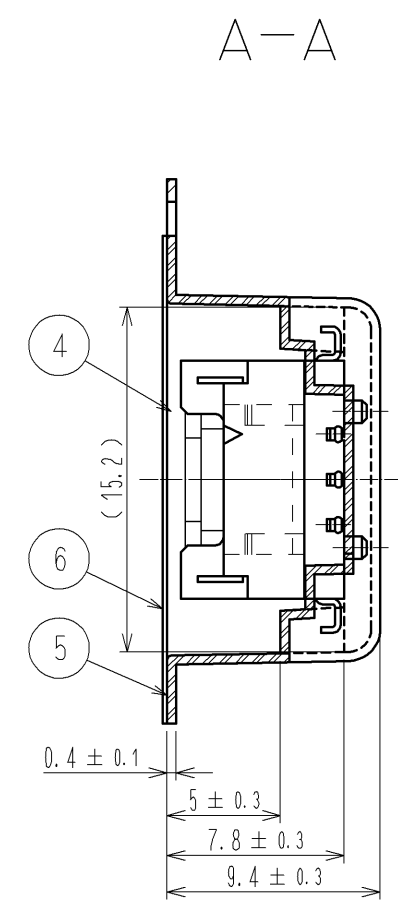

5> DETAIL OF PART No. LABEL

SUPPLIER	
QUANTITY	
PART No.	
CODE No.	
DATE OF MANUFACTURED	
生産月日	年 月 日
図番	CL543-0586-8-57
品番	DF11-6DP-2V(57)
納入数量	500k ϕ
納入者	ヒロセ電機(株)

- NOTES
- 1 REEL:500 CONNECTORS.
 - AT THE BEGINNING OF REEL, 15 COMPONENTS SHALL BE EMPTY. AT THE END OF THE REEL, 10 COMPONENTS SHALL BE EMPTY.
 - 5> DETAIL OF PART NO. LABEL IS WRITTEN IN JAPANESE.
 - THE REEL IS POLYETHYLENE PACKAGED WITH A DRY AGENT INSIDE FOR MOISTURE-PROOF PACKAGING.
 - FOR THE STORAGE OF 168 HOURS OR MORE AFTER OPENING THE PACKAGE, KEEP THE PRODUCTS UNDER MOISTURE PROOF CONDITIONS.
 - EXCEPT ON THE MATING SURFACE, COMPONENT INFLATION DOES NOT AFFECT THE PRODUCTS PERFORMANCE.

HRS	DRAWING NO.	EDC3-081529-01
	PART NO.	DF11-6DP-2V(57)
	CODE NO.	CL543-0586-8-57

2/2