
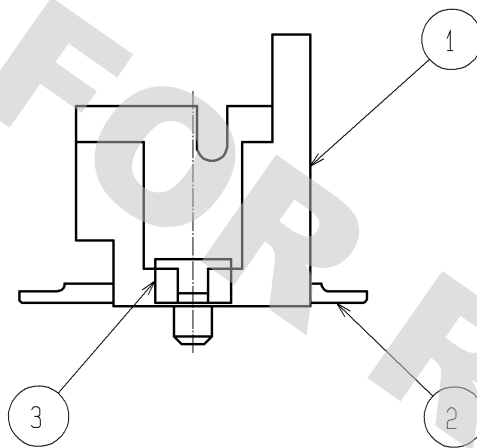
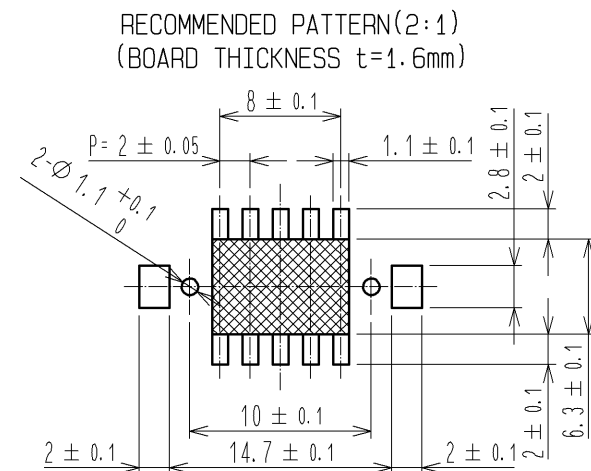
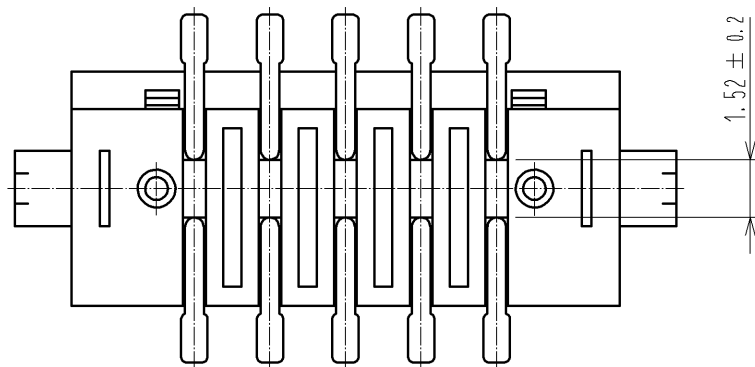
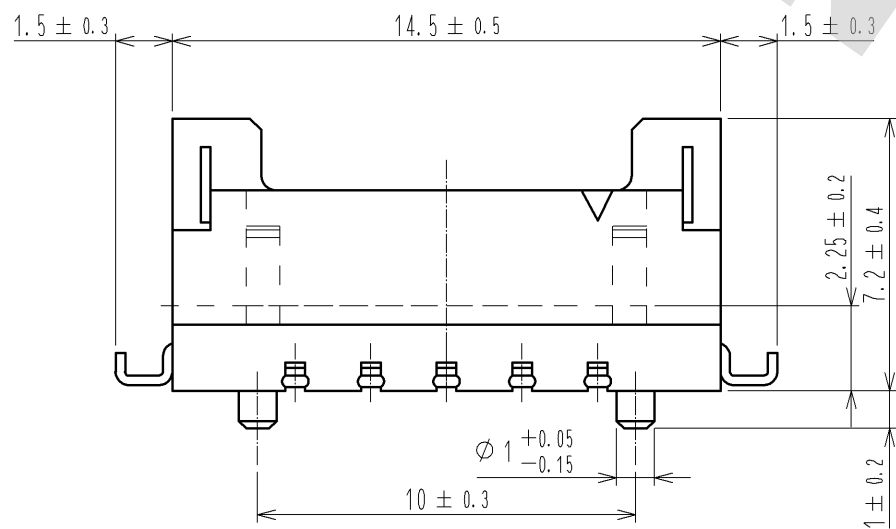
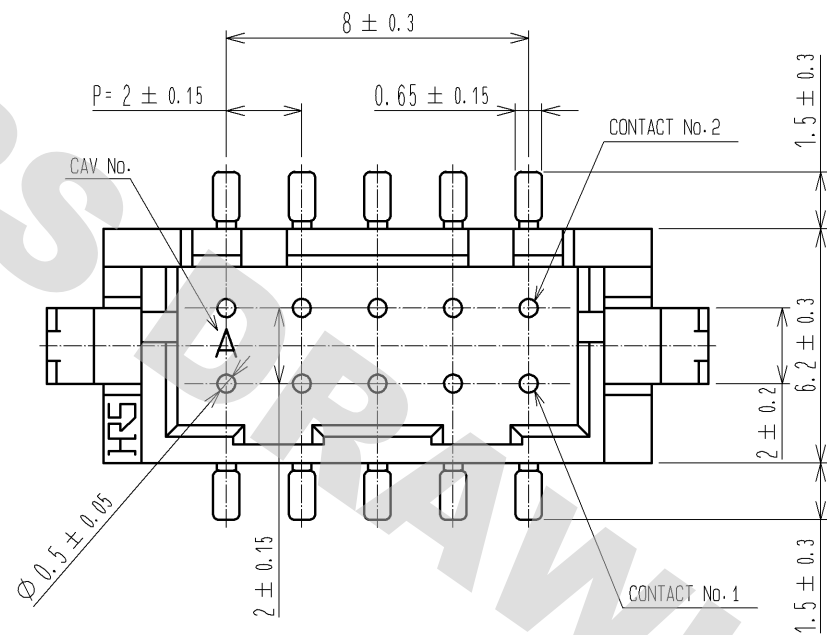


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012



- NOTE 1 LEAD CO-PLANALITY INCLUDE REINFORCED METAL FITTING SHALL BE 0.1mmMAX.
2 WHEN A PART MARKED WITH  HAS A PATTERN AND NO RESIST ON IT, USE CARE TO PREVENT THE CONNECTOR TERMINAL FROM CONTACTING IT.

3	BRASS	SURFACE:TIN PLATED 1μm min	6	POLYESTER	CLEAR COVER TAPE
2	BRASS	SURFACE:GOLD PLATED 0.2μm min UNDER PLATING:NICKEL 1μm min	5	PS	EMBOSSED CARRIER TAPE,CLEAR
1	POLYAMIDE	BEIGE, UL94V-0	4	POLYAMIDE	CAP, BLACK
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.				APPROVED :TS. SAKATA	08.10.20	DRAWING NO. EDC3-081531-01		
				CHECKED :TS. KUMAZAWA	08.10.16	PART NO. DF11-10DP-2V(57)		
				DESIGNED :KT. ISHII	08.10.01	CODE NO. CL543-0588-3-57		
				DRAWN :KT. ISHII	08.10.01	 1/2		

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

