
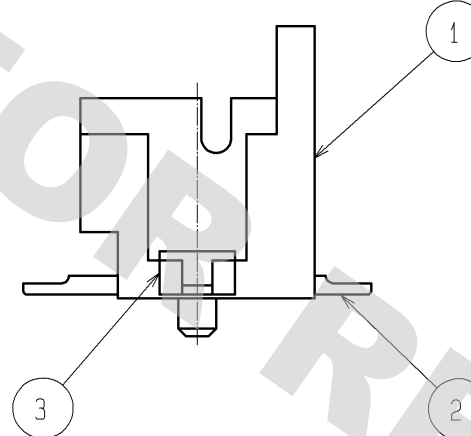
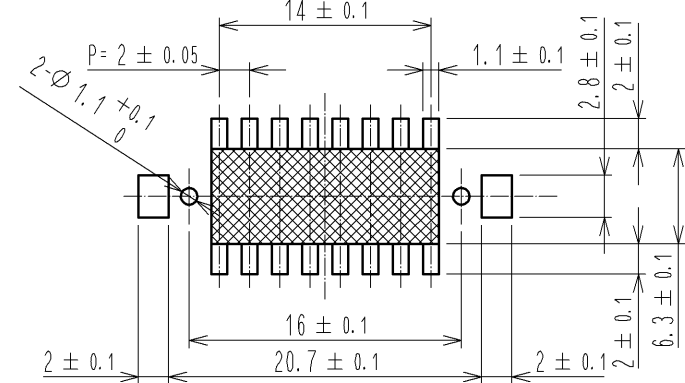



DRAWING F
08/11/2012



NOTE 1 LEAD CO-PLANALITY INCLUDE REINFORCED METAL FITTING SHALL BE 0.1mmMAX.
2 WHEN A PART MARKED WITH  HAS A PATTERN AND NO RESIST ON IT,
USE CARE TO PREVENT THE CONNECTOR TERMINAL FROM CONTACTING IT.

3	BRASS	SURFACE:TIN PLATED 1μm min	6	POLYESTER	CLEAR· COVER TAPE				
2	BRASS	SURFACE:GOLE PLATED 0.2μm min	5	A-PET	EMBOSSED CARRIER TAPE·CLEAR				
1	POLYAMIDE	BEIGE· UL94V-0	4	POLYAMIDE	CAP· BLACK				
NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS		
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :TS. SAKATA		08.10.20	DRAWING NO.		EDC3-081534-03		
		CHECKED :TS. KUMAZAWA		08.10.16	PART NO.		DF11-16DP-2V(57)		
		DESIGNED :KT. ISHII		08.10.01	CODE NO.		CL543-0591-8-57		
		DRAWN :KT. ISHII		08.10.01			 1/		

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

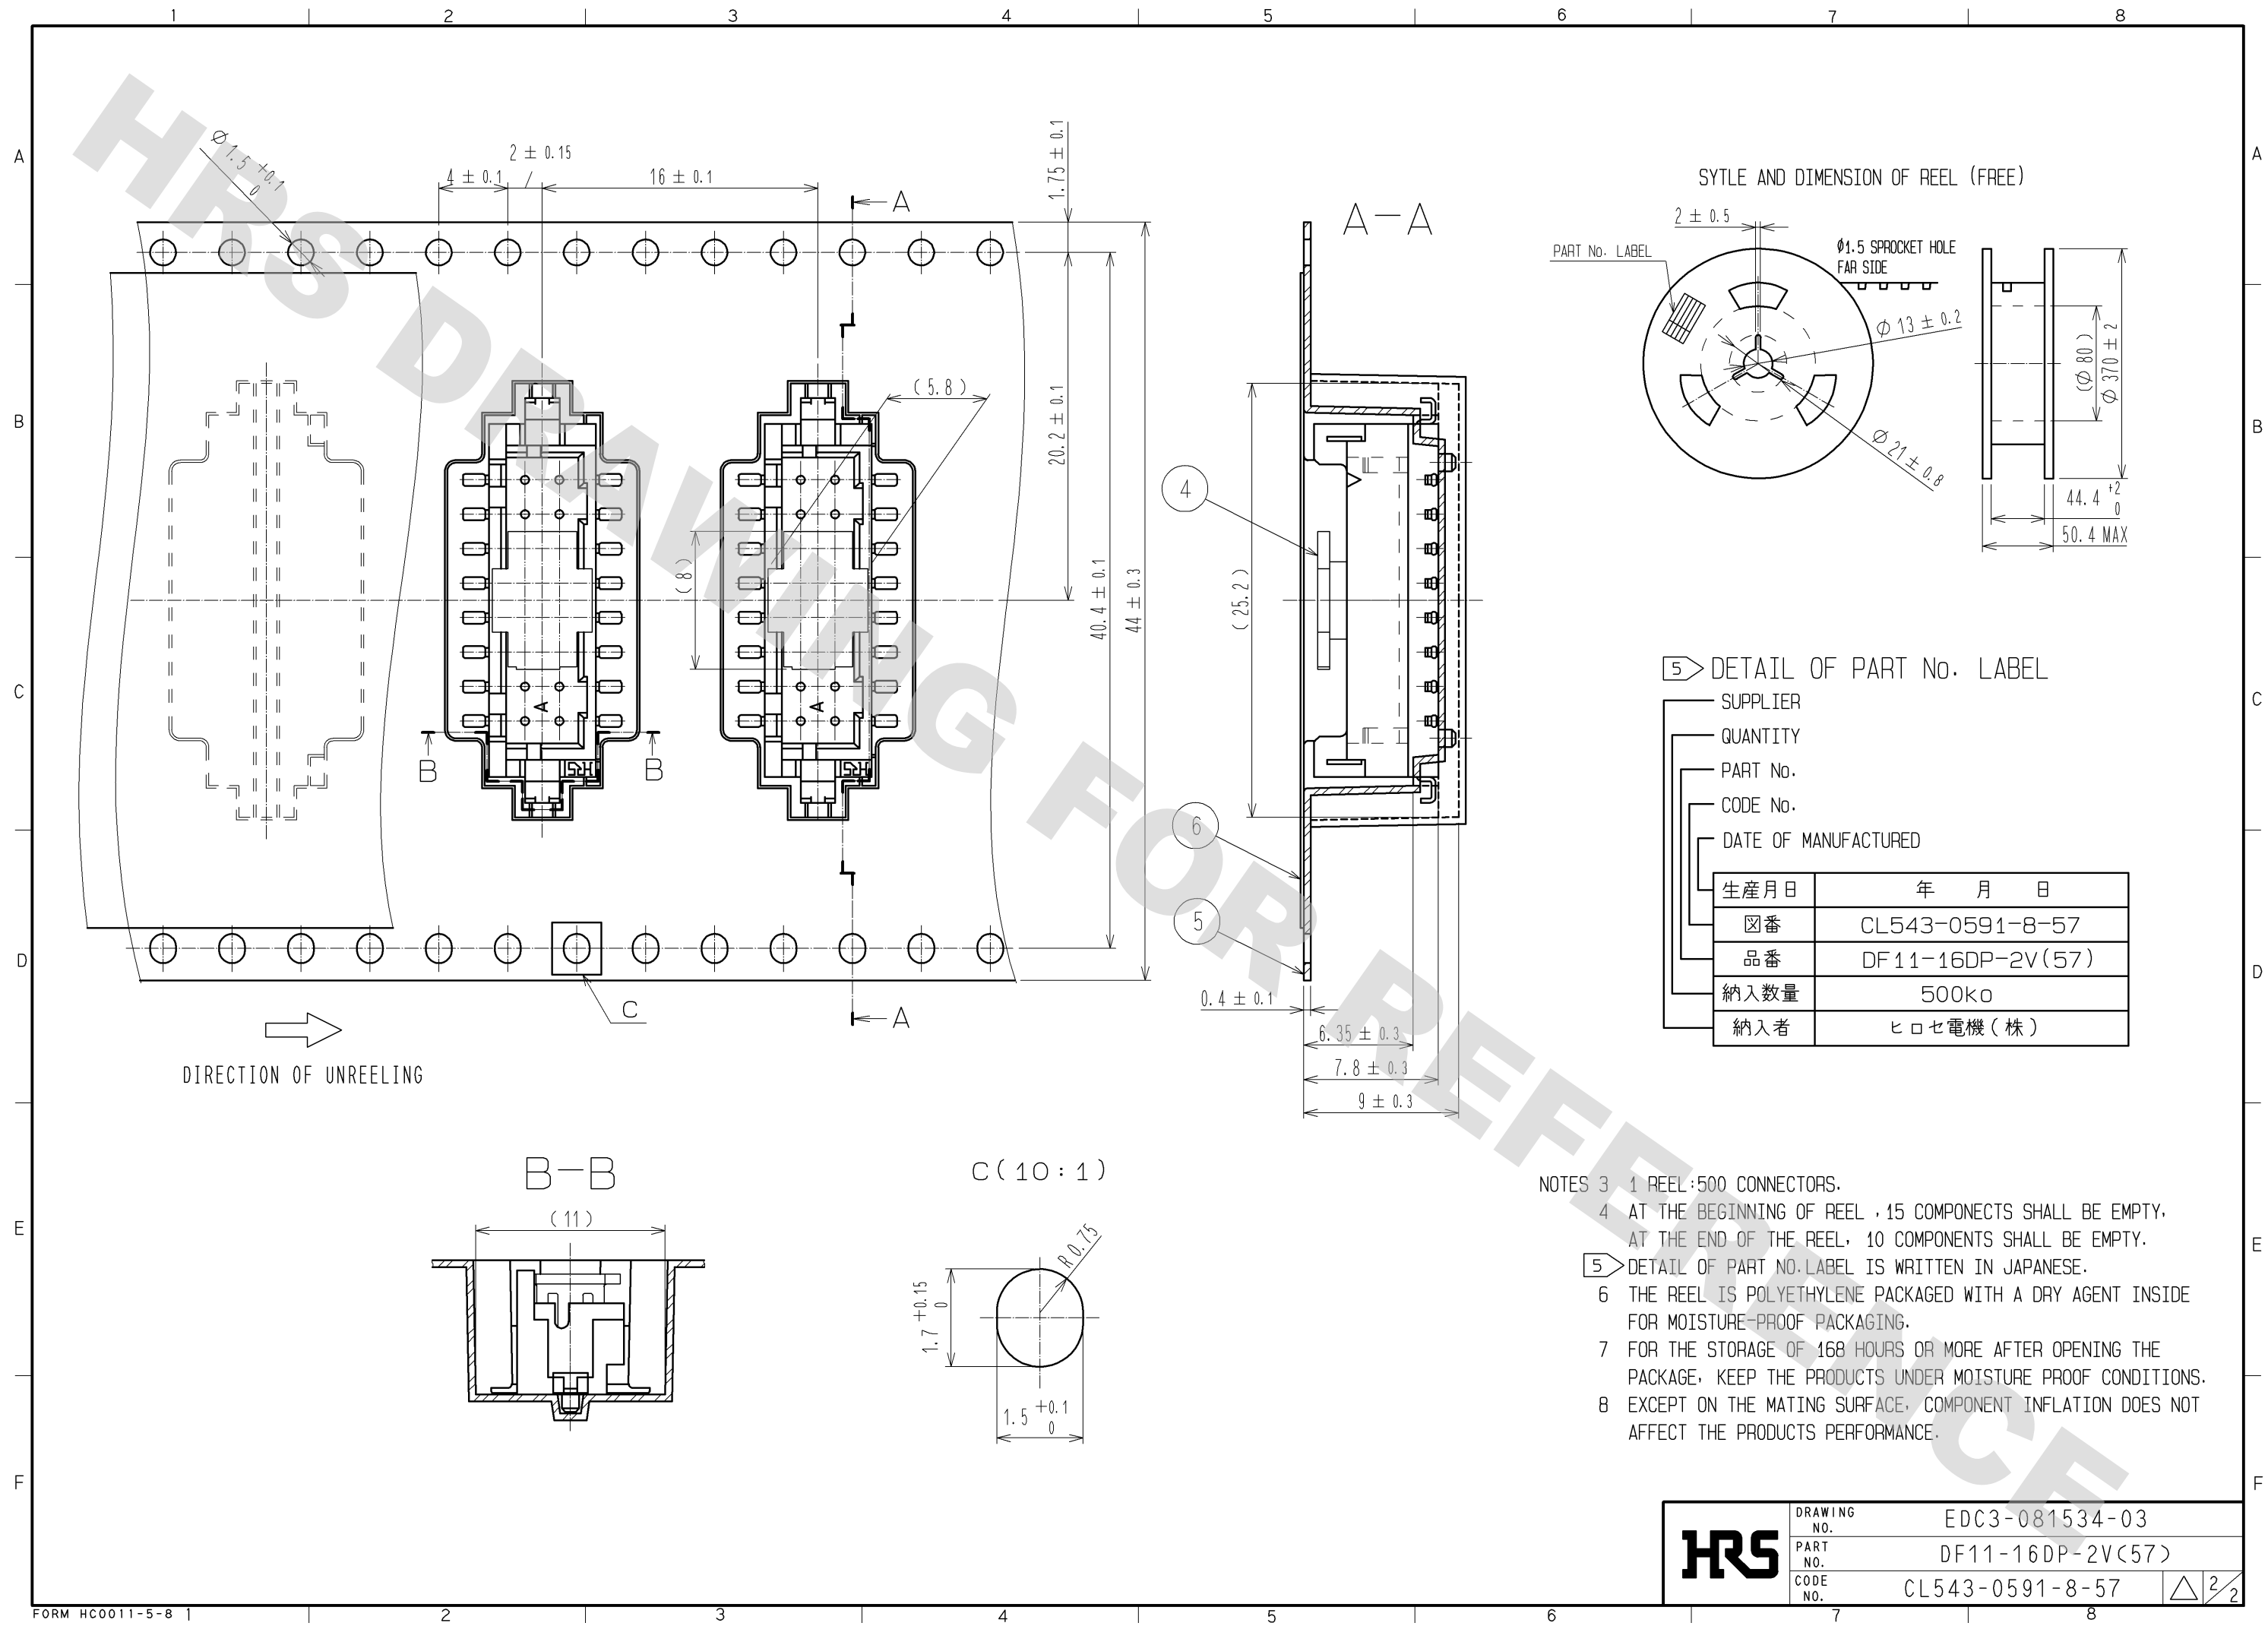

SYTLE AND DIMENSION OF REEL (FREE)

5> DETAIL OF PART No. LABEL

SUPPLIER	
QUANTITY	
PART No.	
CODE No.	
DATE OF MANUFACTURED	
生産月日	年 月 日
図番	CL543-0591-8-57
品番	DF11-16DP-2V(57)
納入数量	500ko
納入者	ヒロセ電機(株)

- NOTES 3 1 REEL:500 CONNECTORS.
- 4 AT THE BEGINNING OF REEL ,15 COMPONECTS SHALL BE EMPTY.
AT THE END OF THE REEL, 10 COMPONENTS SHALL BE EMPTY.
- 5> DETAIL OF PART NO.LABEL IS WRITTEN IN JAPANESE.
- 6 THE REEL IS POLYETHYLENE PACKAGED WITH A DRY AGENT INSIDE
FOR MOISTURE-PROOF PACKAGING.
- 7 FOR THE STORAGE OF 168 HOURS OR MORE AFTER OPENING THE
PACKAGE, KEEP THE PRODUCTS UNDER MOISTURE PROOF CONDITIONS.
- 8 EXCEPT ON THE MATING SURFACE, COMPONENT INFLATION DOES NOT
AFFECT THE PRODUCTS PERFORMANCE.

HRS	DRAWING NO.	EDC3-081534-03
	PART NO.	DF11-16DP-2V(57)
	CODE NO.	CL543-0591-8-57
		$\triangle 2/2$