

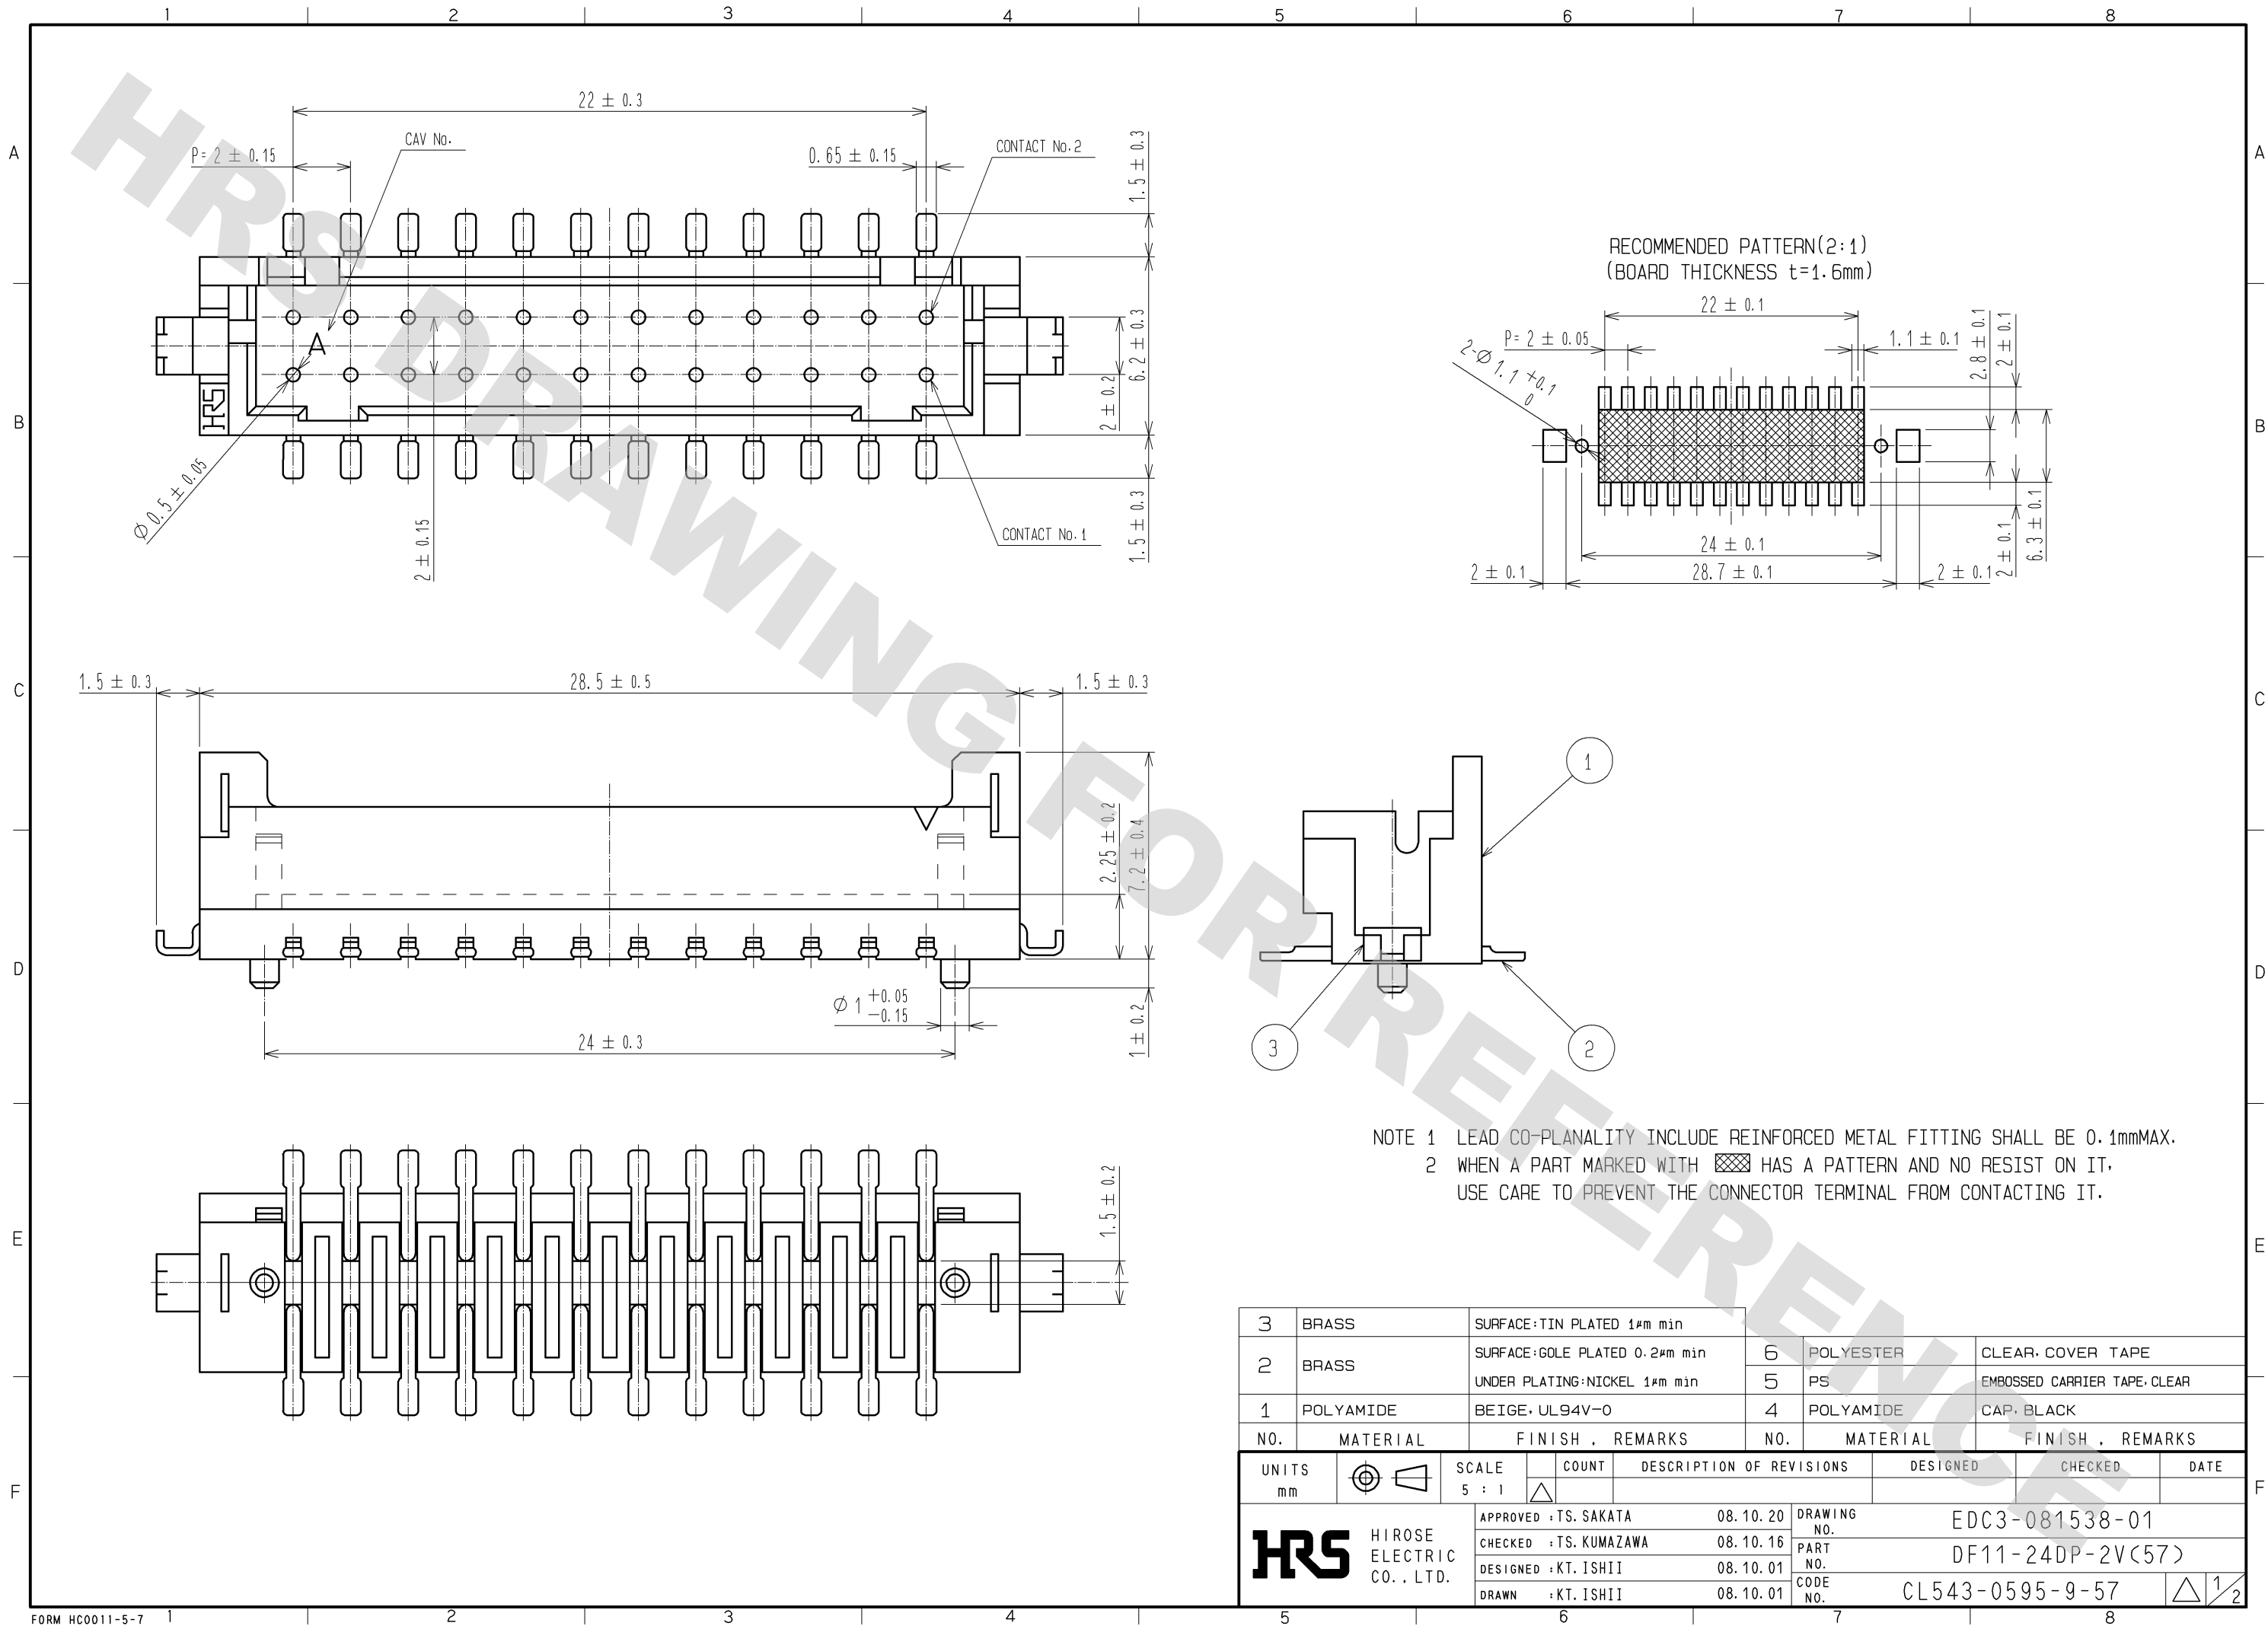


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012



3	BRASS	SURFACE:TIN PLATED 1μm min													
2	BRASS	SURFACE:GOLD PLATED 0.2μm min UNDER PLATING:NICKEL 1μm min	6	POLYESTER	CLEAR, COVER TAPE										
			5	PS	EMBOSSED CARRIER TAPE, CLEAR										
1	POLYAMIDE	BEIGE, UL94V-0	4	POLYAMIDE	CAP, BLACK										
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS									
UNITS mm				SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE		
 HIROSE ELECTRIC CO.,LTD.				APPROVED : TS. SAKATA		08.10.20		DRAWING NO.		EDC3-081538-01					
				CHECKED : TS. KUMAZAWA		08.10.16		PART NO.		DF11-24DP-2V(57)					
				DESIGNED : KT. ISHII		08.10.01		CODE NO.		CL543-0595-9-57					
				DRAWN : KT. ISHII		08.10.01									
														1/2	

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

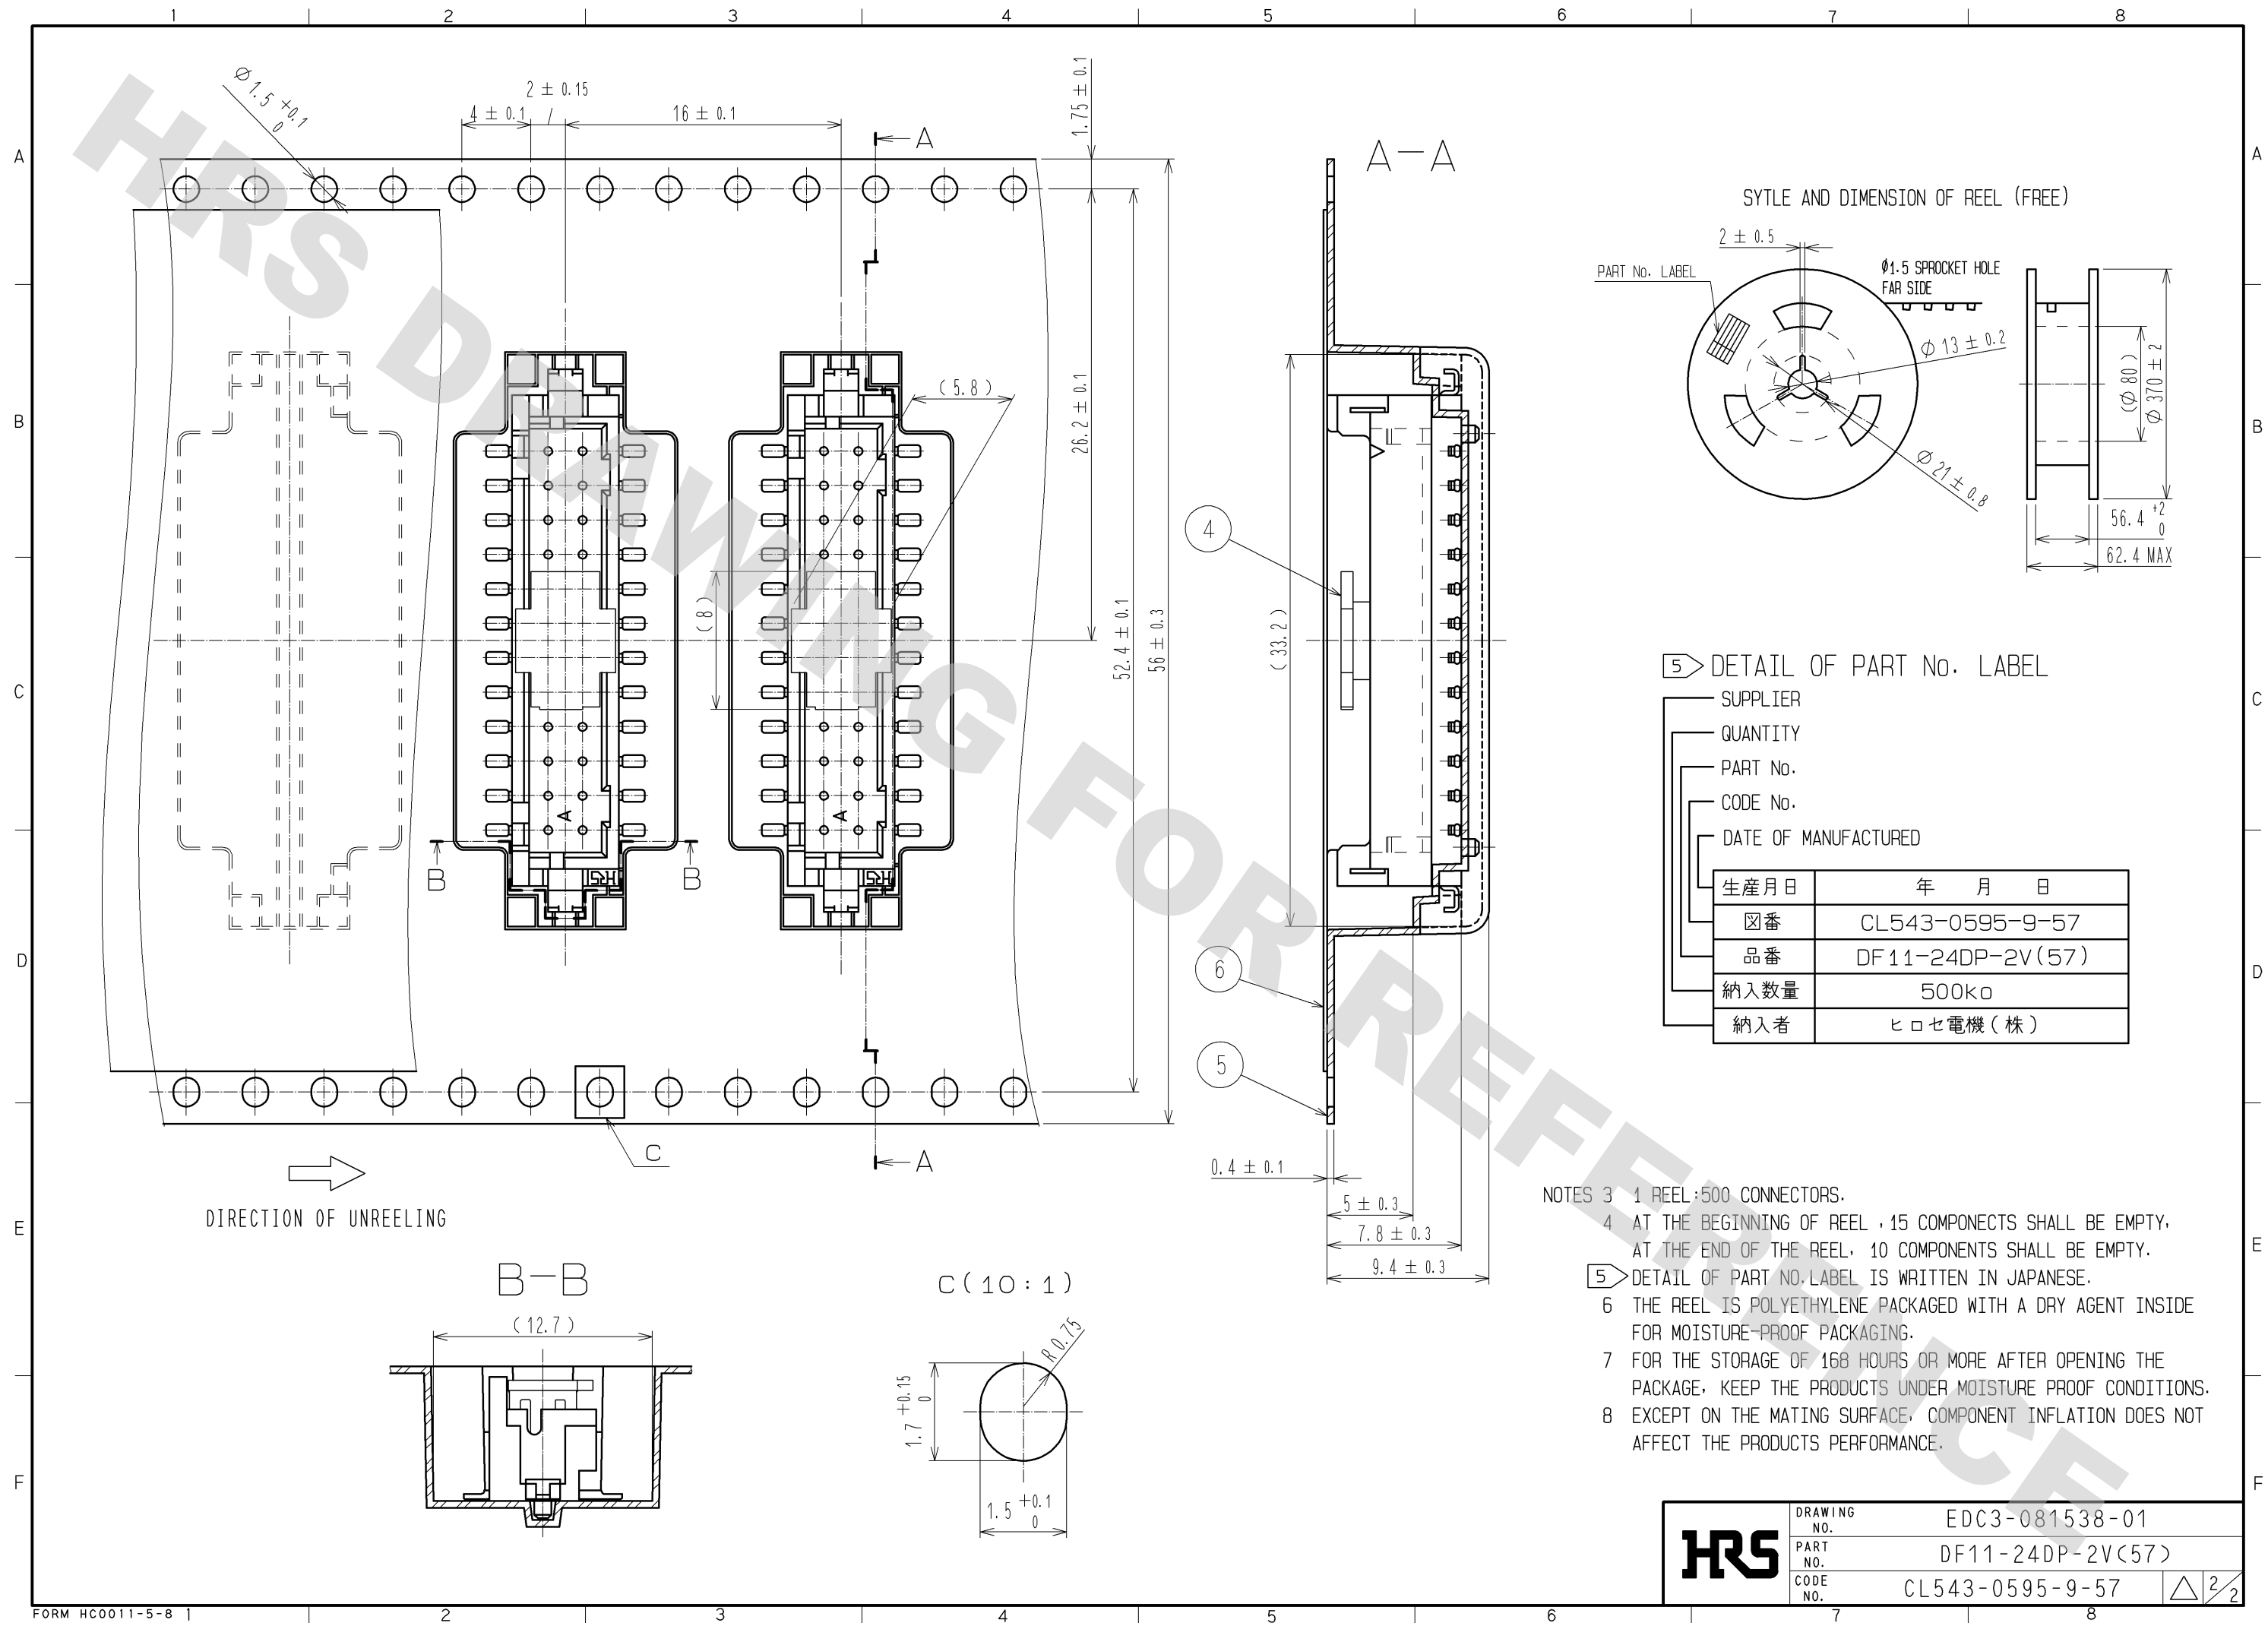

5> DETAIL OF PART No. LABEL

SUPPLIER	
QUANTITY	
PART No.	
CODE No.	
DATE OF MANUFACTURED	
生産月日	年 月 日
図番	CL543-0595-9-57
品番	DF11-24DP-2V(57)
納入数量	500ko
納入者	ヒロセ電機(株)

- NOTES
- 1 REEL:500 CONNECTORS.
 - 2 AT THE BEGINNING OF REEL, 15 COMPONECTS SHALL BE EMPTY, AT THE END OF THE REEL, 10 COMPONENTS SHALL BE EMPTY.
 - 3 DETAIL OF PART No. LABEL IS WRITTEN IN JAPANESE.
 - 4 THE REEL IS POLYETHYLENE PACKAGED WITH A DRY AGENT INSIDE FOR MOISTURE-PROOF PACKAGING.
 - 5 FOR THE STORAGE OF 168 HOURS OR MORE AFTER OPENING THE PACKAGE, KEEP THE PRODUCTS UNDER MOISTURE PROOF CONDITIONS.
 - 6 EXCEPT ON THE MATING SURFACE, COMPONENT INFLATION DOES NOT AFFECT THE PRODUCTS PERFORMANCE.

HRS	DRAWING NO.	EDC3-081538-01
	PART NO.	DF11-24DP-2V(57)
	CODE NO.	CL543-0595-9-57