

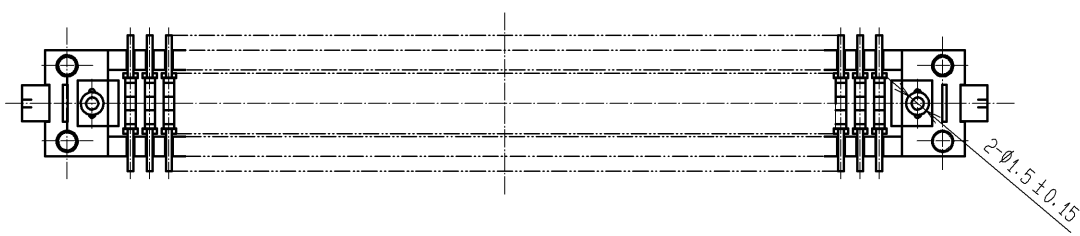
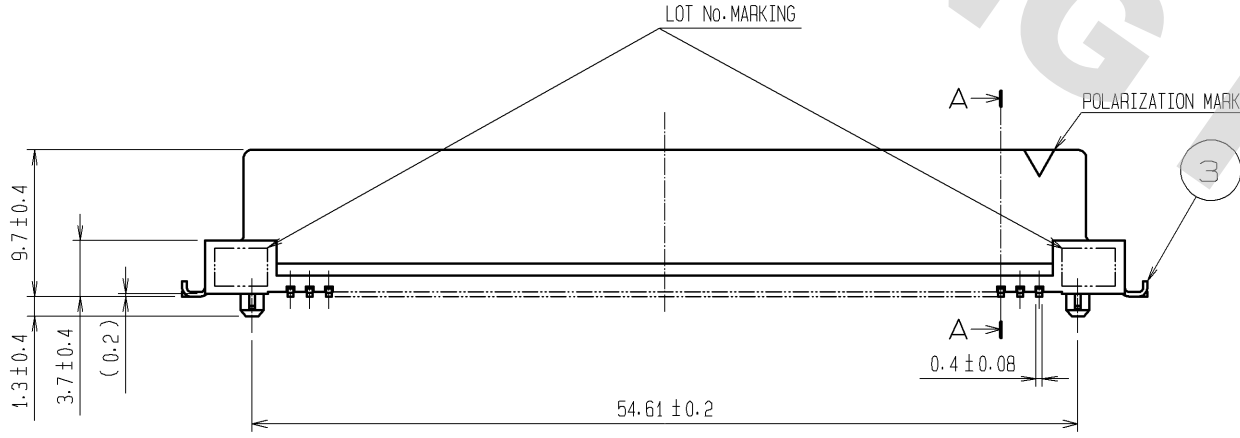
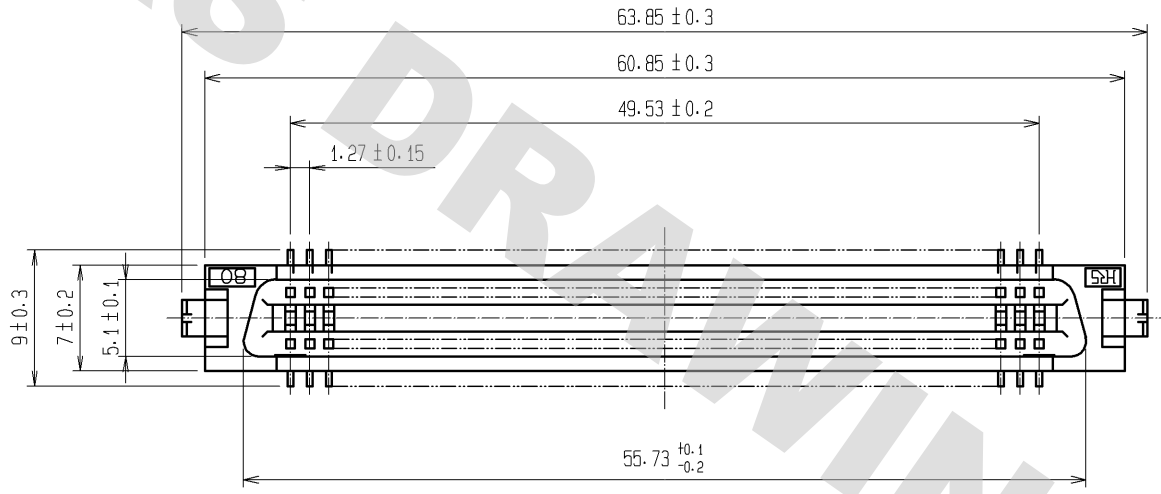
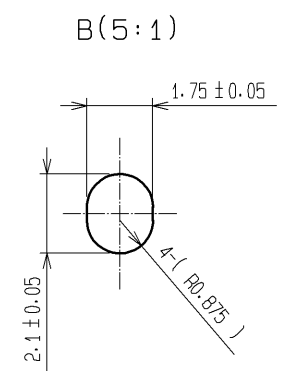


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

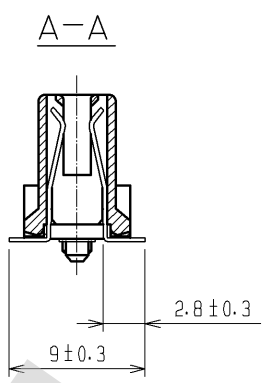

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS: 0.2mm)

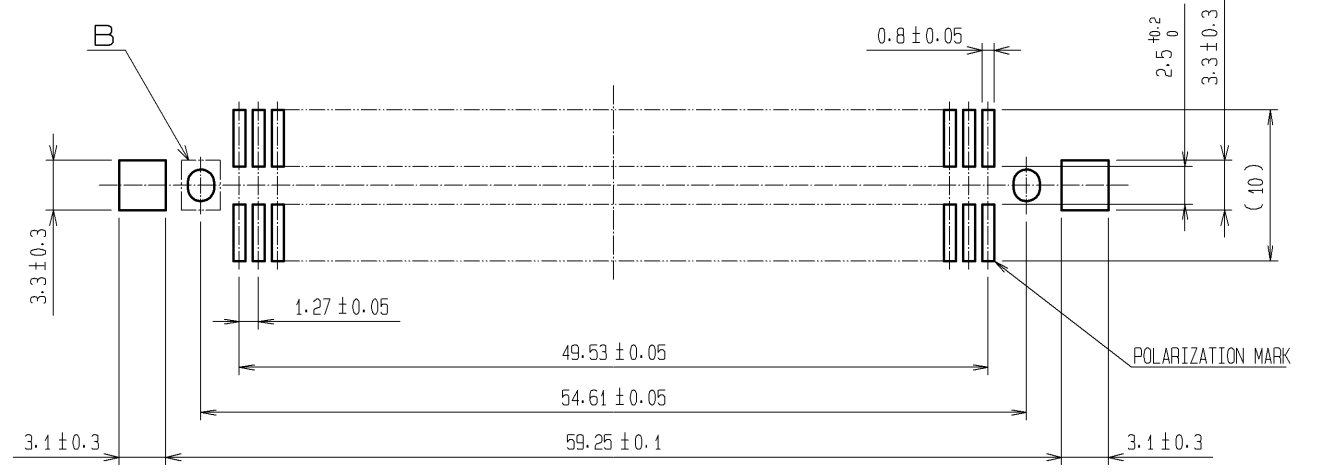


- NOTE
- 1 LEAD CO-PLANARITY SHALL BE 0.15mm MAX.
 - 2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 3 TRAY PACKAGING SHALL BE APPLIED TO THIS PRODUCT. SEE NEXT PAGE FOR DETAILS.


2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.2µm min.							
		LEAD AREA: TIN-PLATING 2µm min.							
		UNDER PLATING: NICKEL 1.5µm min.	4	PS					TRAY
1	PPS	LIGHT BROWN (UL94V-0)	3	BRASS					TIN-PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS				
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS			DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	09.12.21	DRAWING NO. EDC3-082423-01					
		CHECKED : HT. YAMAGUCHI	09.12.21	PART NO. FX2-80S-1.27SVL(95)					
		DESIGNED : SY. KAMIGA	09.12.21	CODE NO. CL572-2157-8-95					
		DRAWN : HK. SUNADORI	09.12.19						

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

DRAWING FOR PACKING(1:2)

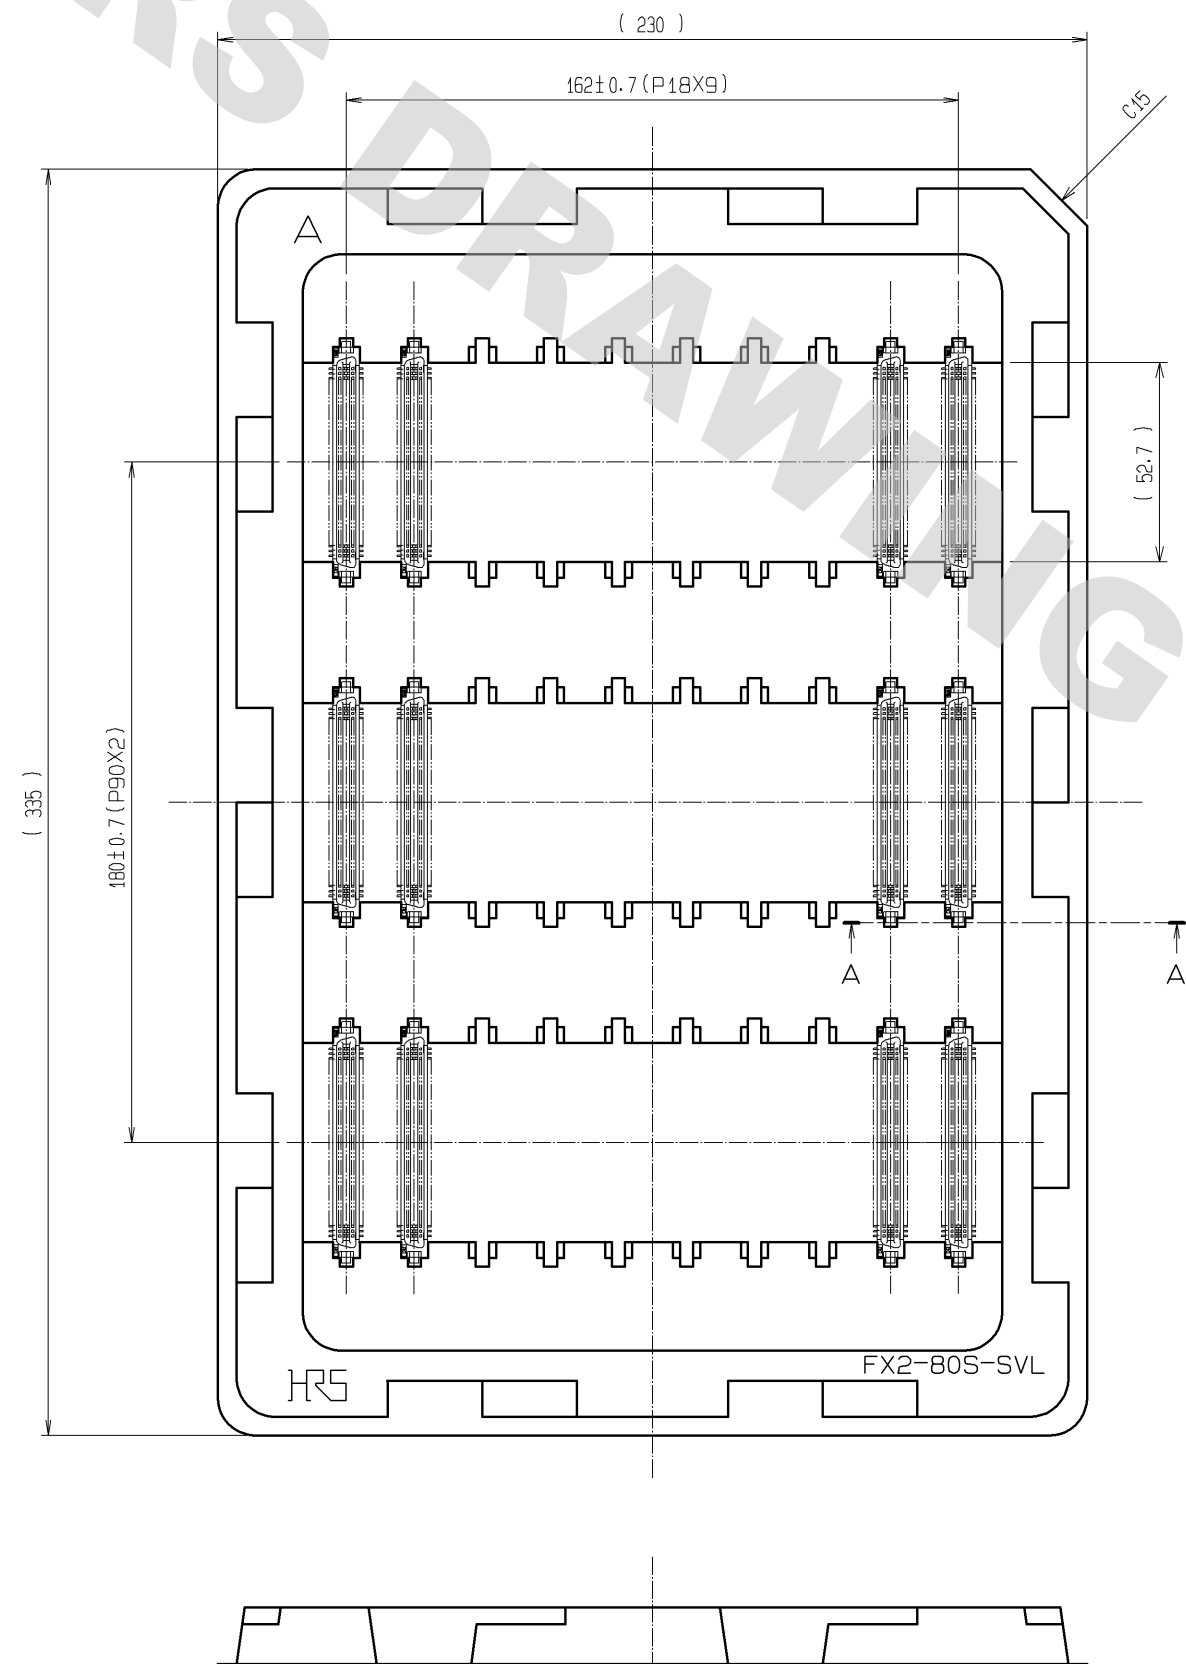

A-A (2:1)

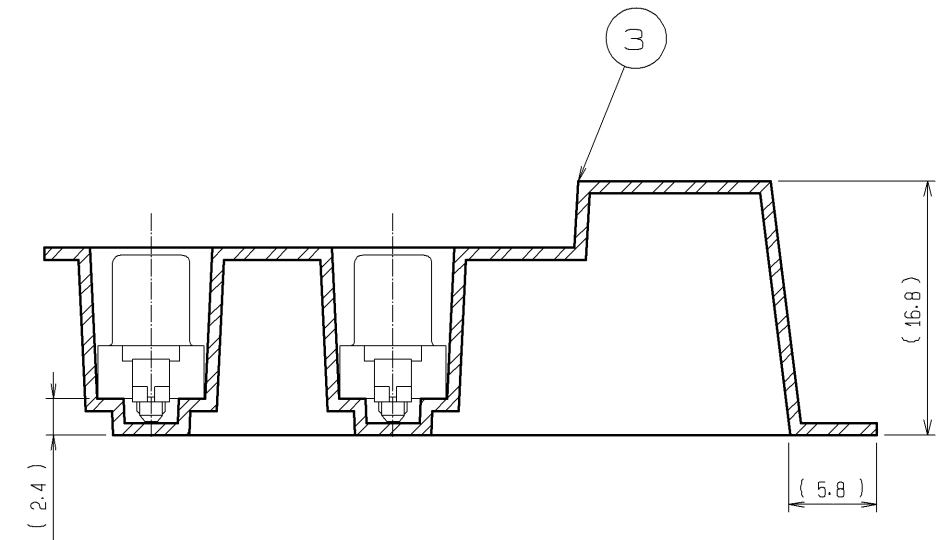

- NOTE 1 1 TRAY:30 CONNECTORS
2 SETTING POSITION OF CONNECTORS IN THE TRAY SHALL BE ARRANGED IN ACCORDANCE WITH DRAWING.
3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS

DRAWING NO.	EDC3-082423-01
PART NO.	FX2-80S-1.27SVL(95)
CODE NO.	CL572-2157-8-95

2/2