


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

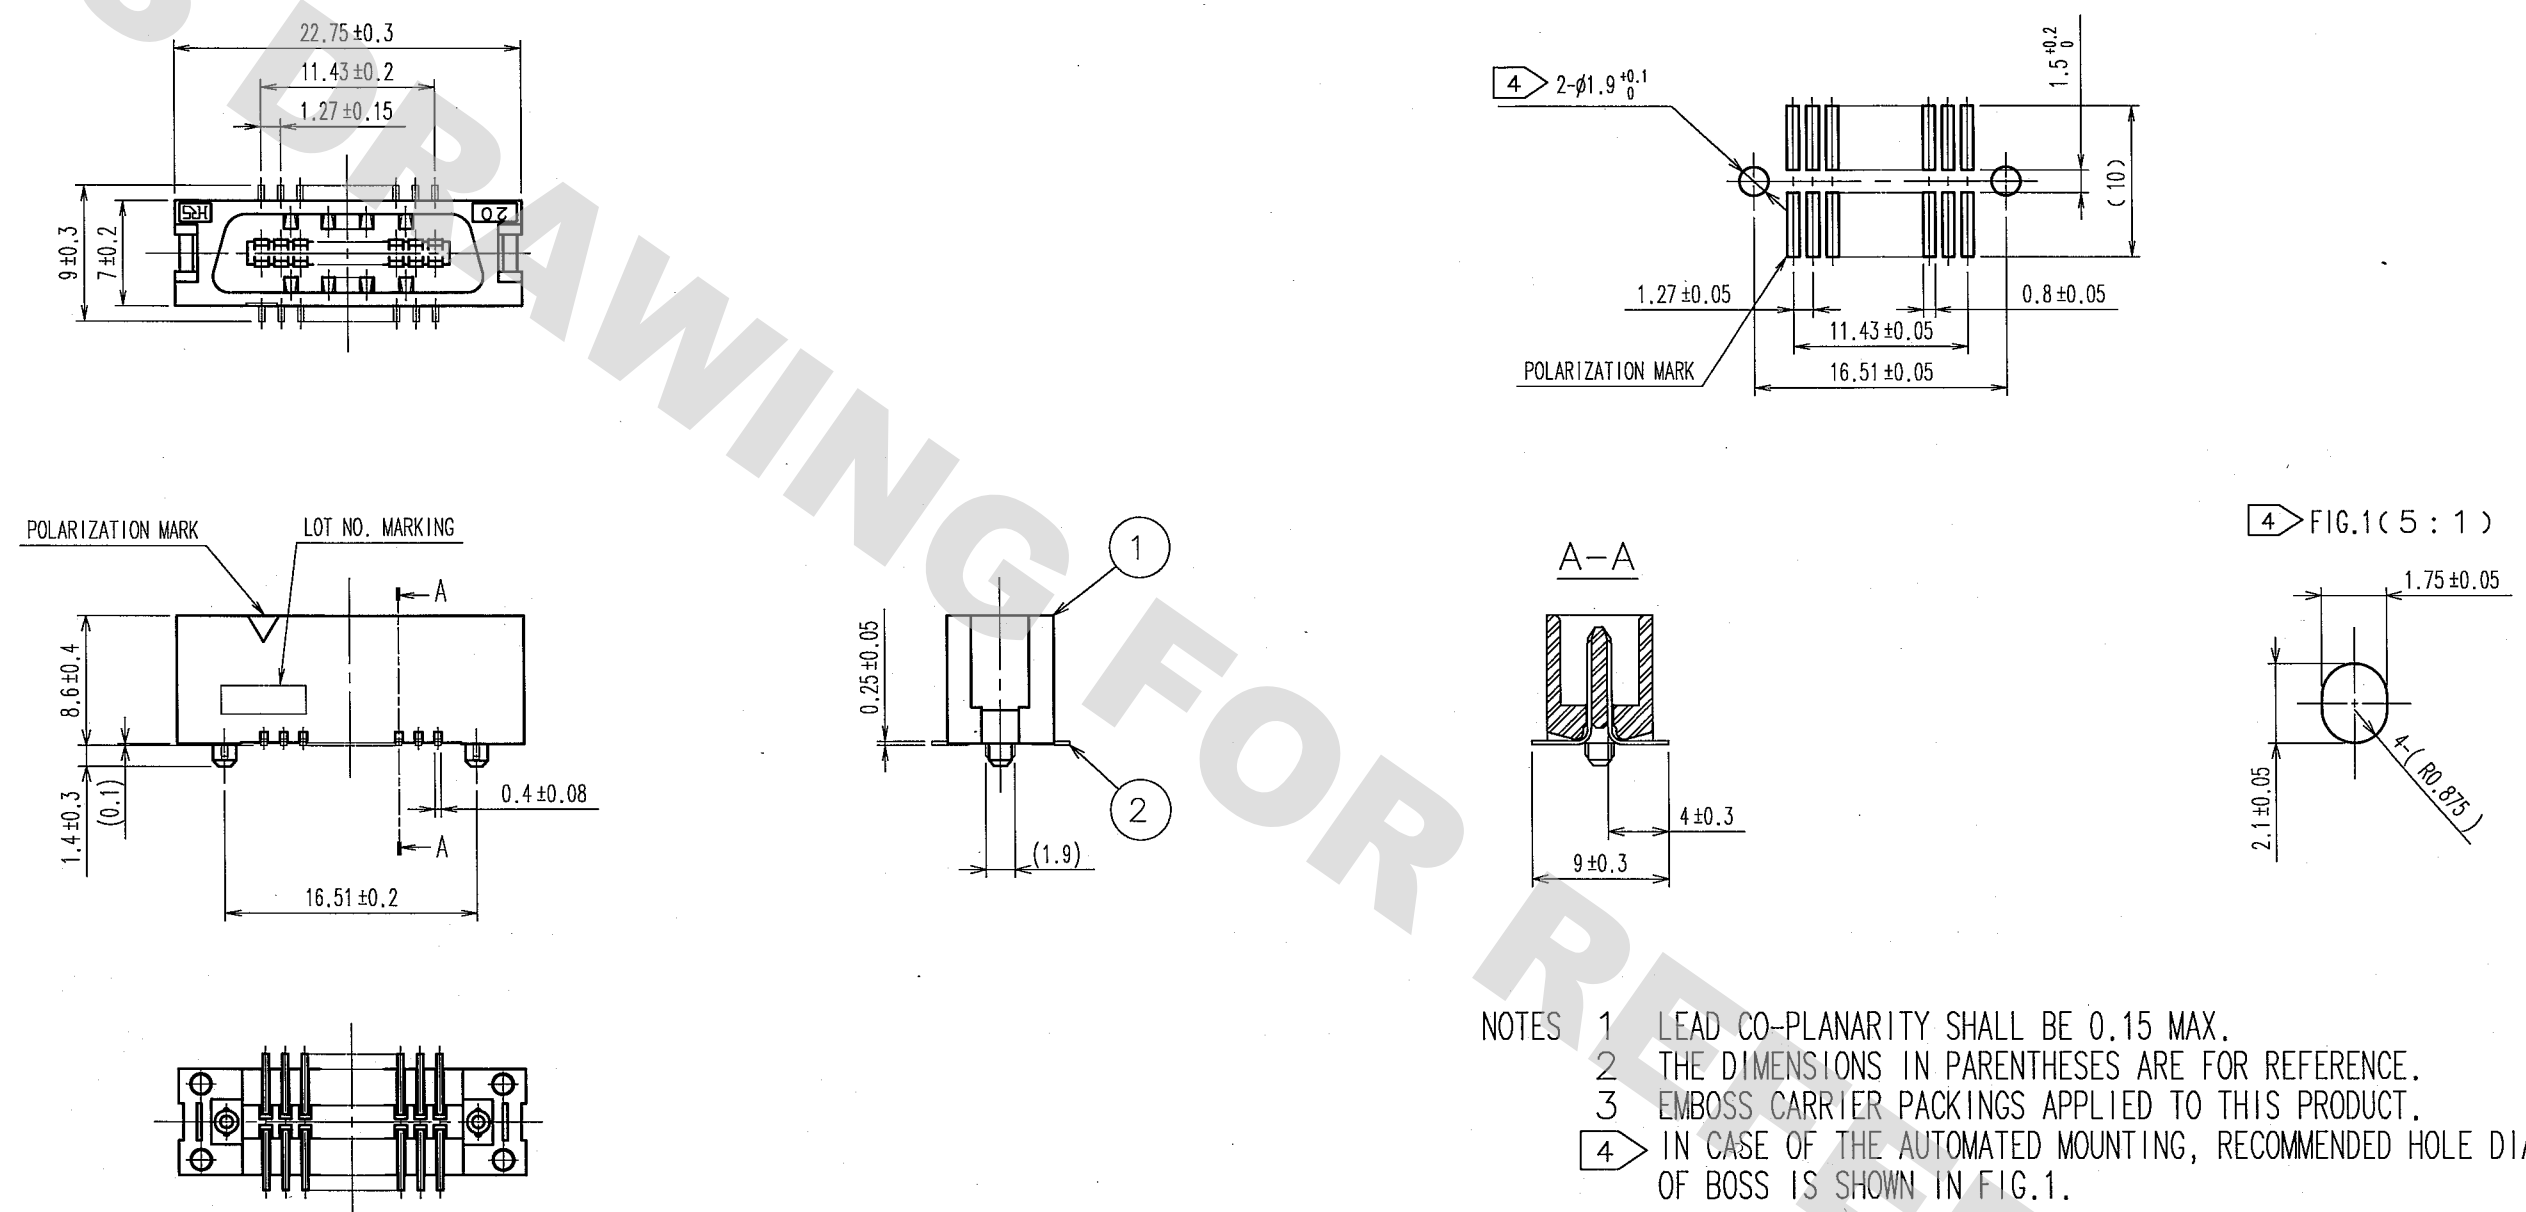


- NOTES
- 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
 - 2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 3 EMBOSS CARRIER PACKINGS APPLIED TO THIS PRODUCT.
 - 4 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS IS SHOWN IN FIG.1.

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μ m min. LEAD AREA:TIN-PLATING 2μ m min. UNDER PLATING:NICKEL 2μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN A.SUZUKAWA 06.12.19	DESIGNED H.Nakamura 06.12.19	CHECKED H.Ozawa 06.12.19
			APPROVED H.Okawa 06.12.19	RELEASED ..	
SCALE 2 : 1 UNITS mm	DRAWING NO. EDC3-082751-22 HRS	PART NO. FX2-20P-1.27SV(92)	CODE NO. CL572-2001-9-92	1/2	
	HIROSE ELECTRIC CO., LTD				

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012


TO
PCK

DIRECTION OF UNREELING






COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

STYLE AND DIMENSIONS OF REEL(FREE)

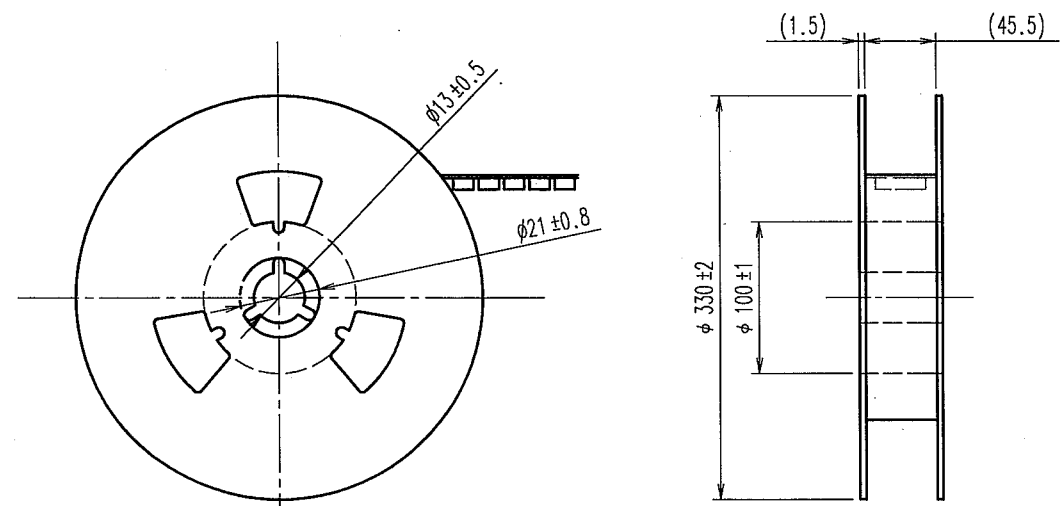

NOTE 1 1 REEL : 500 CONNECTORS

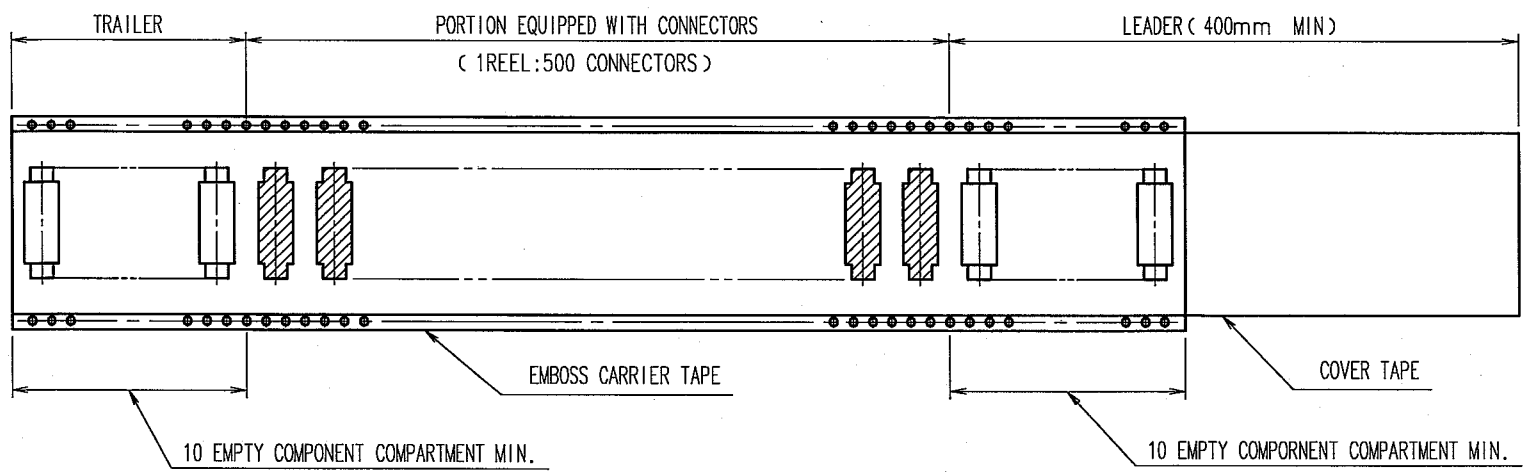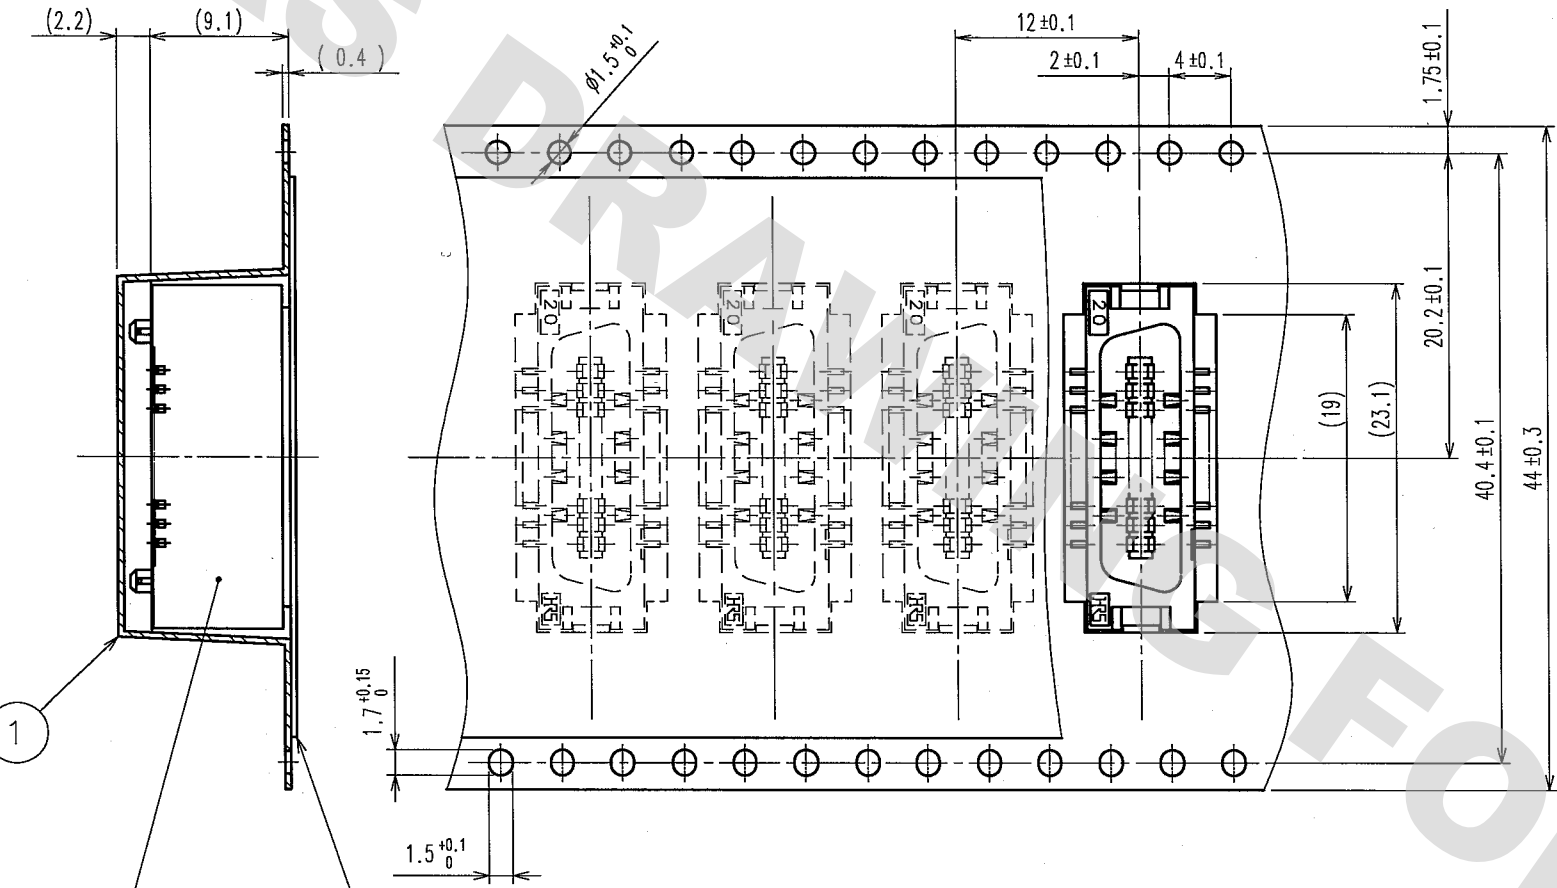

2	POLYESTER	COVER TAPE	3	(CONNECTOR)	
1	POLYSTYRENE	EMBOSS CARRIER TAPE			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
		A. SUZUKAWA	Y. Nakamura	J. Ogawa	H. Okawa
		06.12.19	06.12.19	06.12.19	06.12.19
SCALE 2 : 1		DRAWING NO. EDC3-082751-22		PART NO. FX2-20P-1.27SV(92)	
UNITS mm		HRS HIROSE ELECTRIC CO., LTD		CODE NO. CL572-2001-9-92	
				2/2	