
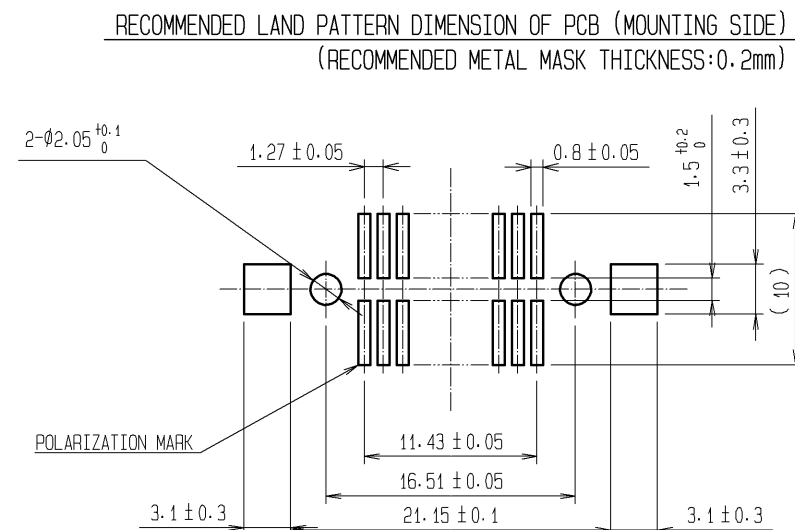
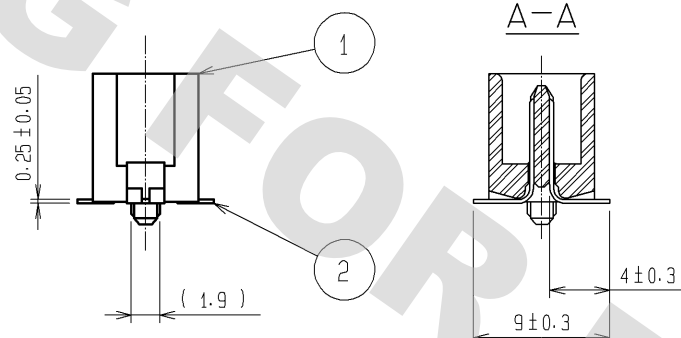
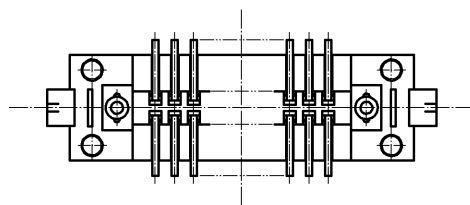
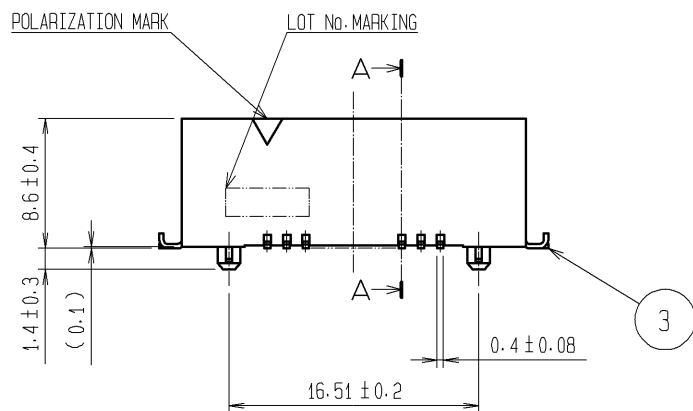
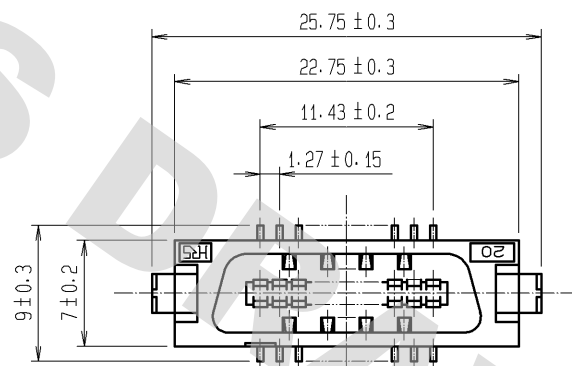


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012




- NOTE 1 LEAD CO-PLANARITY SHALL BE 0.15mm MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 TRAY PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.


2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2#m min.		4	PS	TRAY			
		LEAD AREA:TIN-PLATING 2#m min.							
		UNDER PLATING:NICKEL 2#m min.							
1	PPS	LIGHT BROWN (UL94V-0)		3	BRASS	TIN-PLATING			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :HS. OKAWA		11. 06. 22		DRAWING NO. EDC3-082752-25			
		CHECKED :HT. YAMAGUCHI		11. 06. 22		PART NO. FX2-20P-1. 27SVL(95)			
		DESIGNED :SY. KAMIGA		11. 06. 22		CODE NO. CL572-2051-7-95			
		DRAWN :HK. SUNADORI		11. 06. 21		 1/1			

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

DRAWING FOR PACKING(1:2)

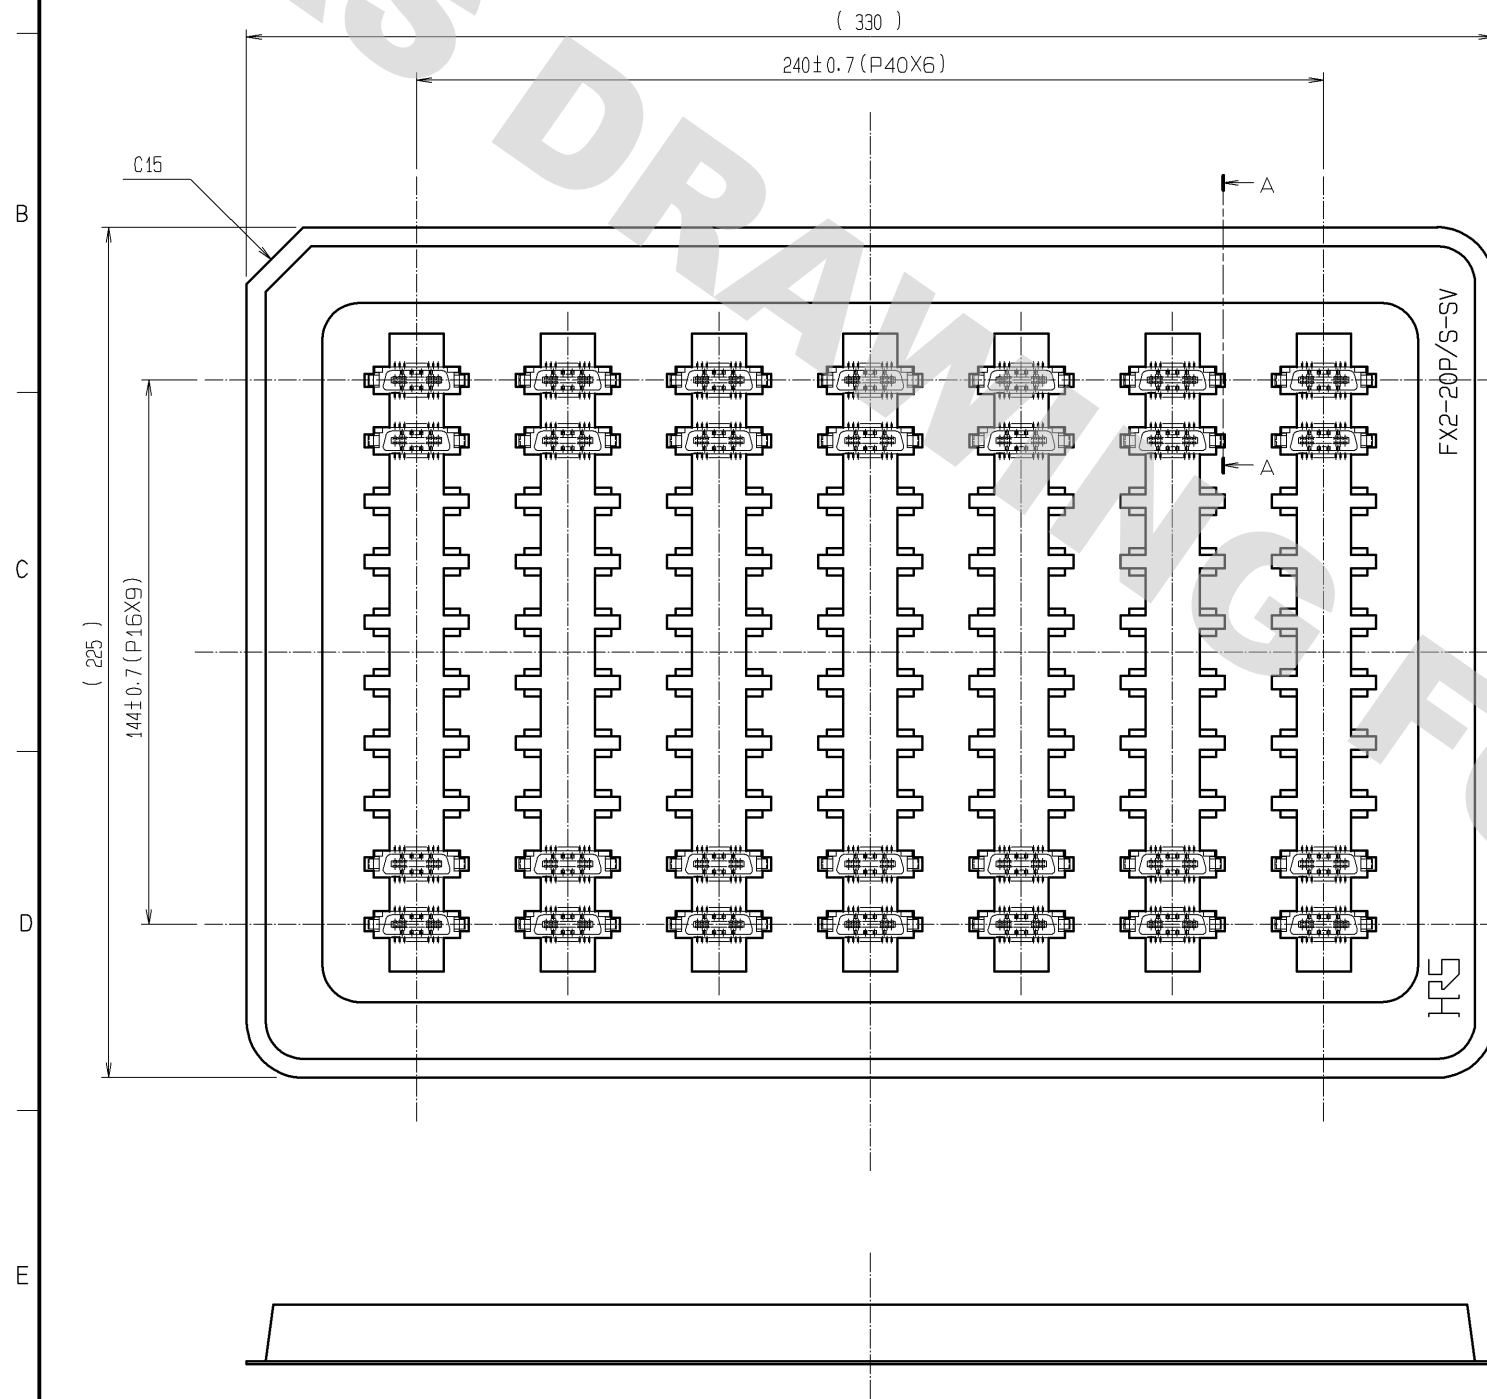

A-A (2:1)

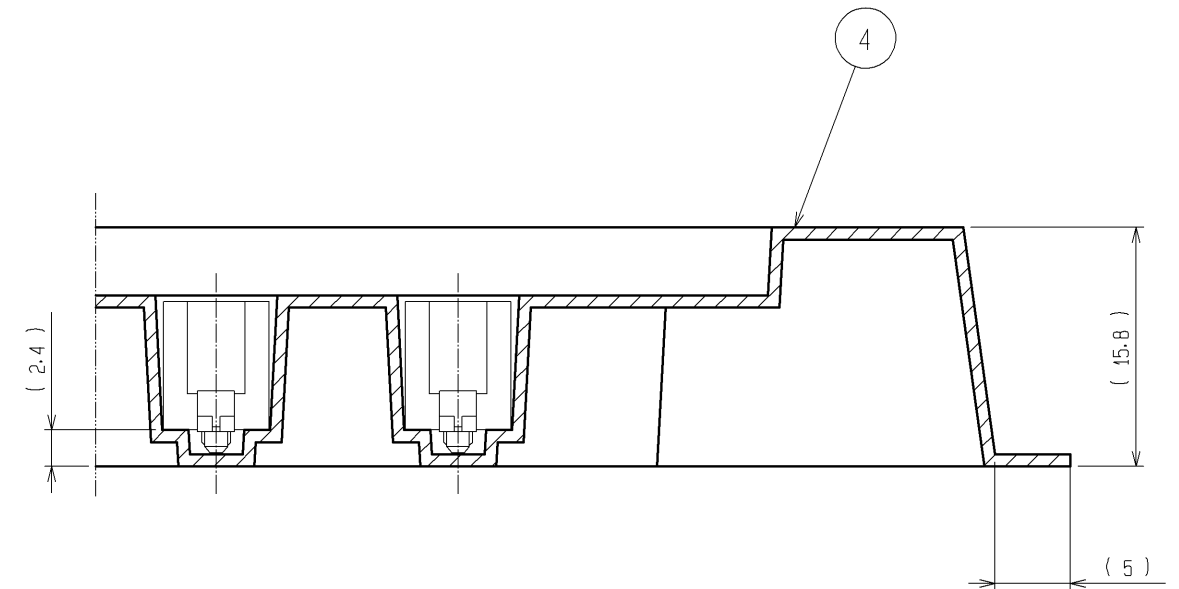

- NOTE
- 1 TRAY:70 CONNECTORS
 - 2 SETTING POSITION OF CONNECTORS IN THE TRAY SHALL BE ARRANGED IN ACCORDANCE WITH DRAWING.
 - 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS

DRAWING NO.	EDC3-082752-25
PART NO.	FX2-20P-1. 27SVL(95)
CODE NO.	CL572-2051-7-95

2/2