

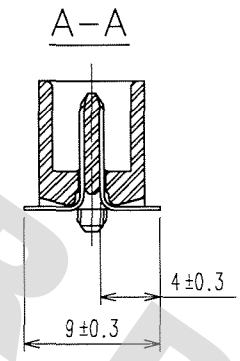
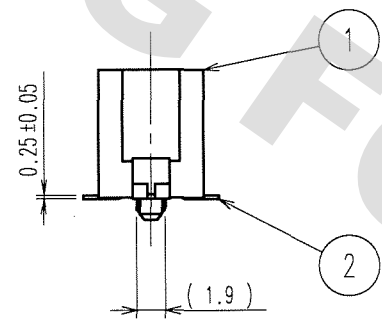
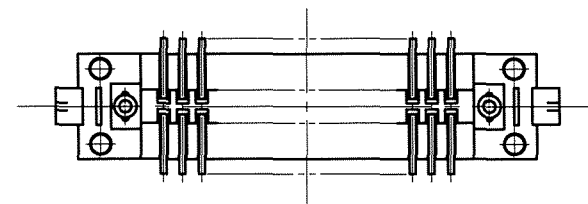
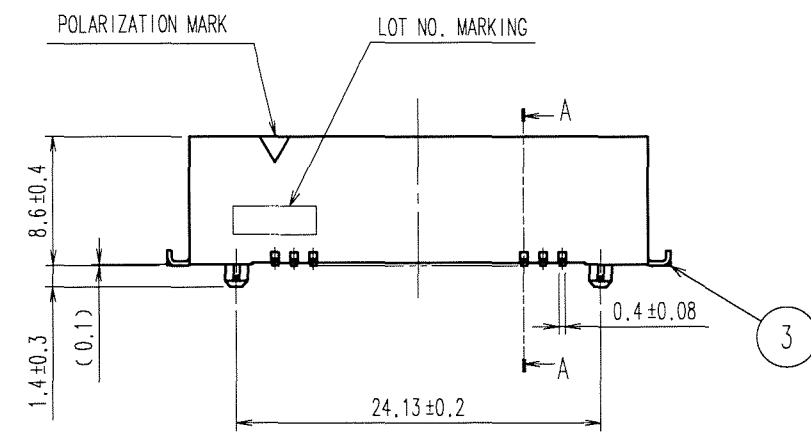
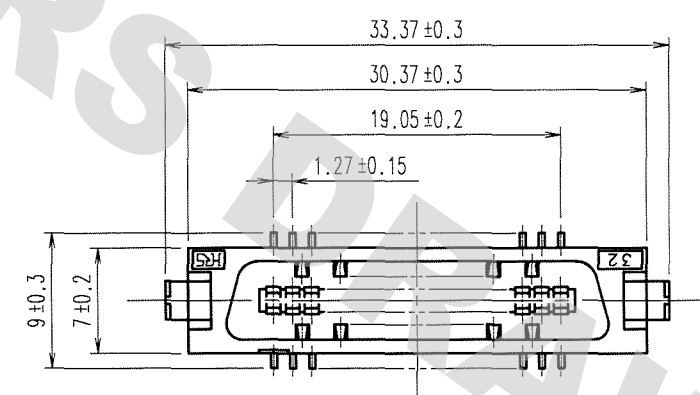


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

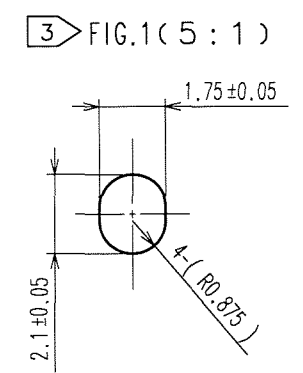

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

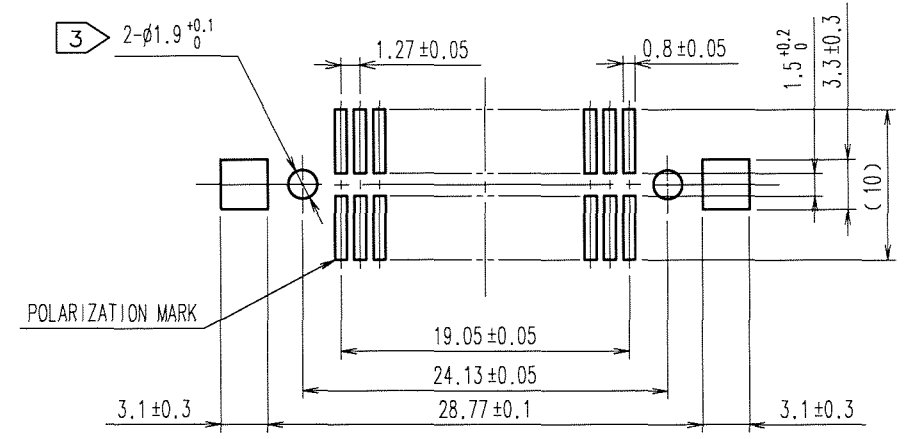

- NOTES 1 LEAD CO-PLANARITY SHALL BE 0.15 MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 IN CASE OF THE AUTOMATED MOUNTING, RECOMMENDED HOLE DIAMETER OF BOSS IS SHOWN IN FIG.1.

3	BRASS	TIN-PLATING	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.2μm min.
1	PPS	LIGHT BROWN (UL94V-0)			LEAD AREA: TIN-PLATING 2μm min.
					UNDER PLATING: NICKEL 2μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL		DRAWN A. SUZUKAWA 06.03.07	DESIGNED H. Nakamura 06.03.07	CHECKED K. Ogiwara 06.03.07	APPROVED H. Okawa 06.03.07
SCALE 2 : 1		DRAWING NO. EDC3-082754-21		PART NO. FX2-32P-1.27SVL(71)	
UNITS mm		HRS HIROSE ELECTRIC CO., LTD		CODE NO. CL572-2052-0-71	

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				.	△				.
△				.	△				.
△				.	△				.