

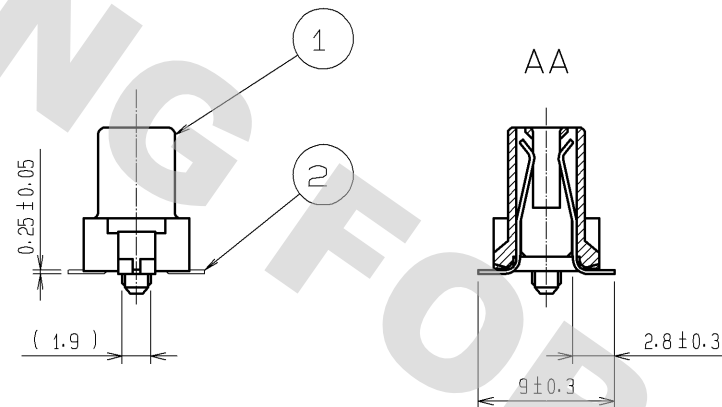
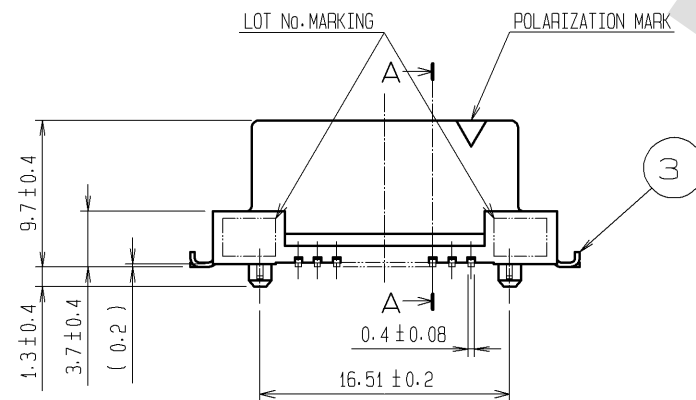



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

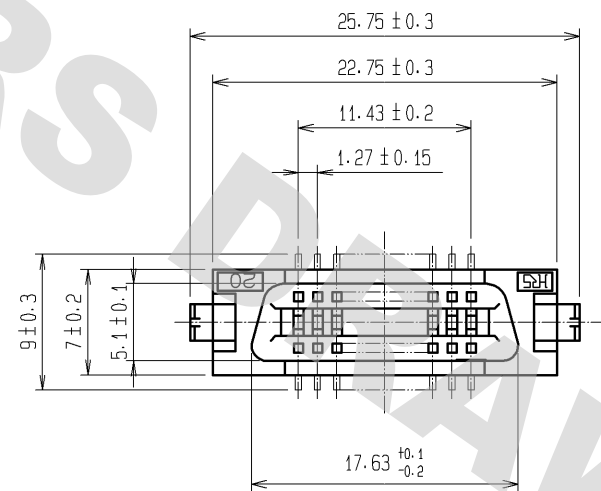

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS: 0.2mm)

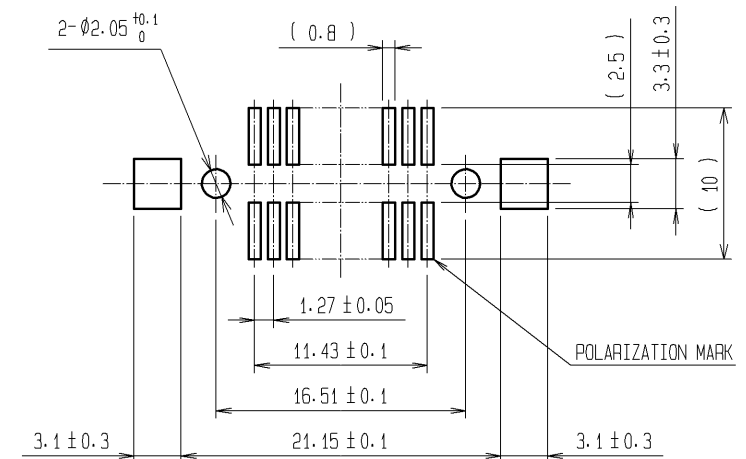


- NOTE 1 LEAD CO-PLANARITY SHALL BE 0.15mm MAX.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
3 TRAY PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.


2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μm min.		4	PS	TRAY			
		LEAD AREA:TIN-PLATING 2μm min.							
		UNDER PLATING:NICKEL 1.5μm min.							
1	PPS	LIGHT BROWN (UL94V-0)		3	BRASS	TIN-PLATING			
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :HS. OKAWA		11.06.22		DRAWING NO. EDC3-082756-25			
		CHECKED :HT. YAMAGUCHI		11.06.22		PART NO. FX2-20S-1.27SVL(95)			
		DESIGNED :SY. KAMIGA		11.06.22		CODE NO. CL572-2151-1-95			
		DRAWN :HK. SUNADORI		11.06.21		 1/2			

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

DRAWING FOR PACKING(1:2)

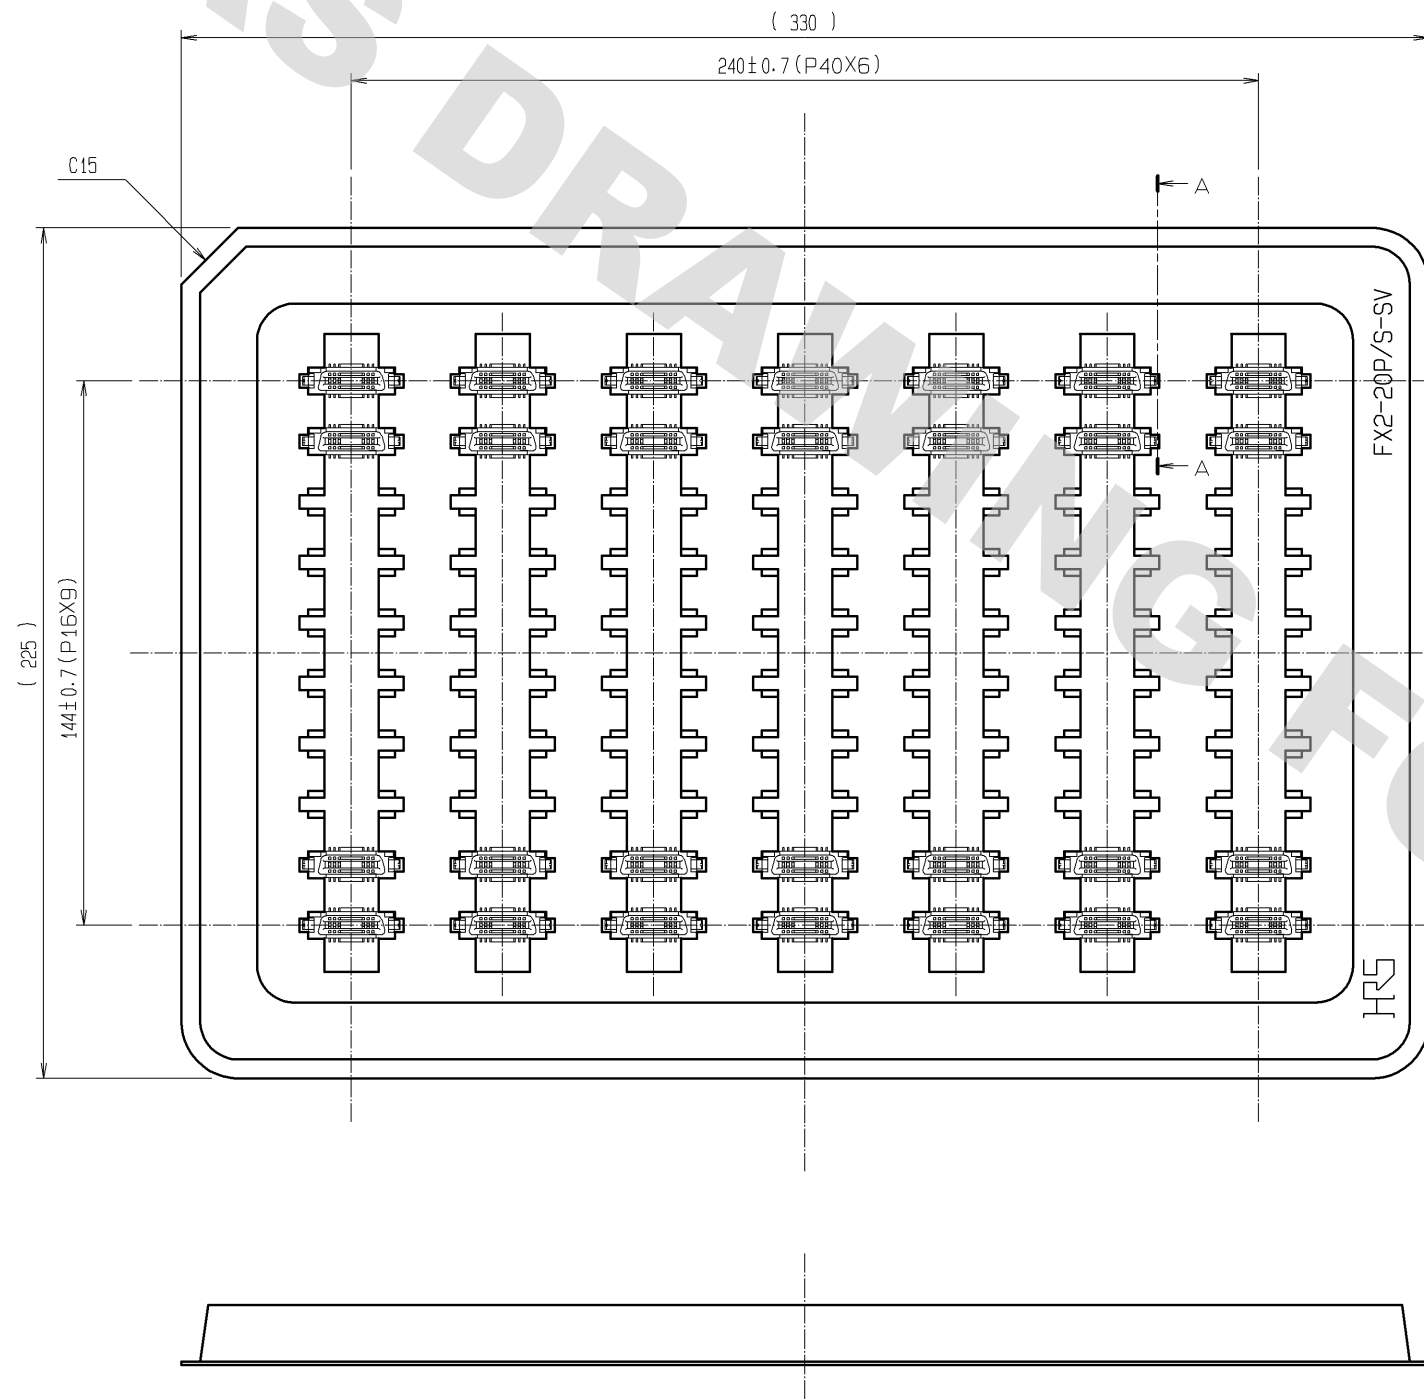

A-A(2:1)

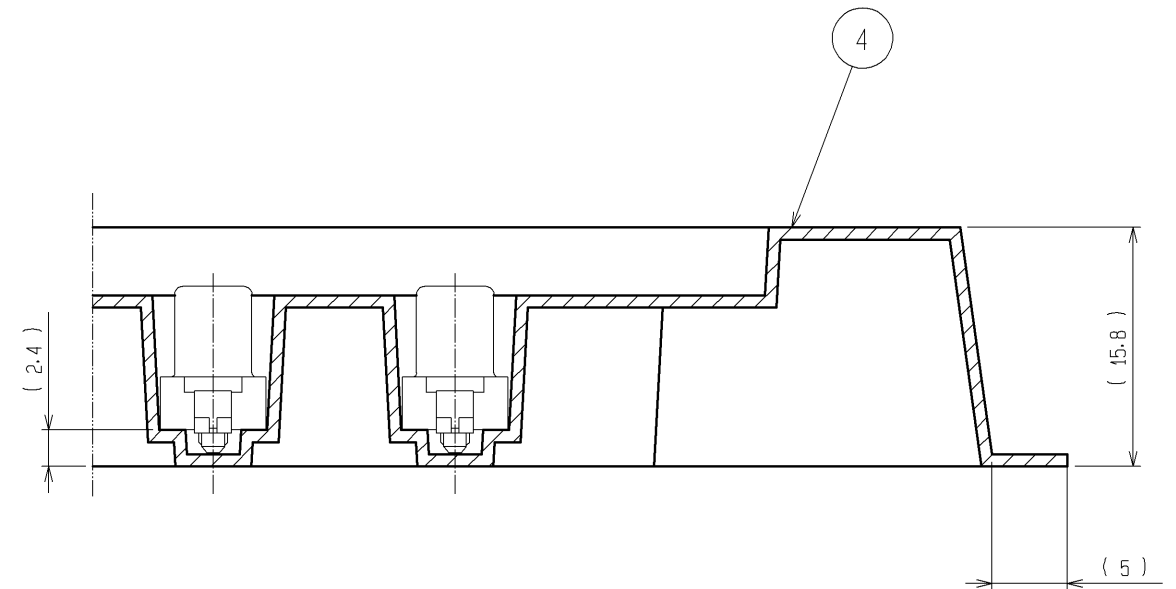

- NOTE 1 1 TRAY:70 CONNECTORS
2 SETTING POSITION OF CONNECTORS IN THE TRAY SHALL BE ARRANGED IN ACCORDANCE WITH DRAWING.
3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS

DRAWING NO.	EDC3-082756-25
PART NO.	FX2-20S-1. 27SVL(95)
CODE NO.	CL572-2151-1-95

2/2