

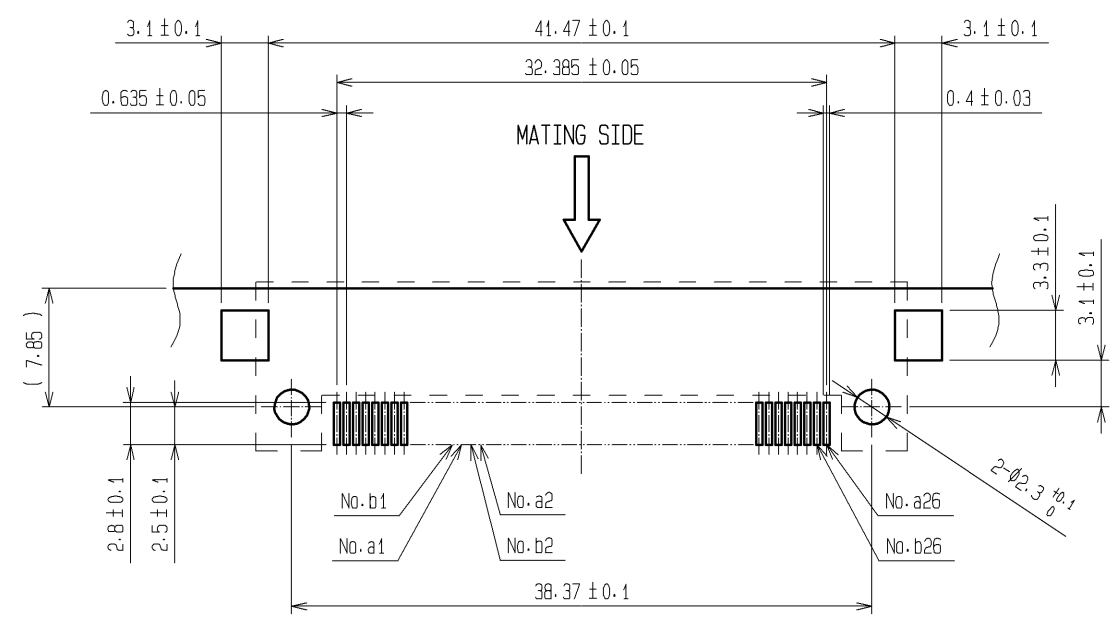


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

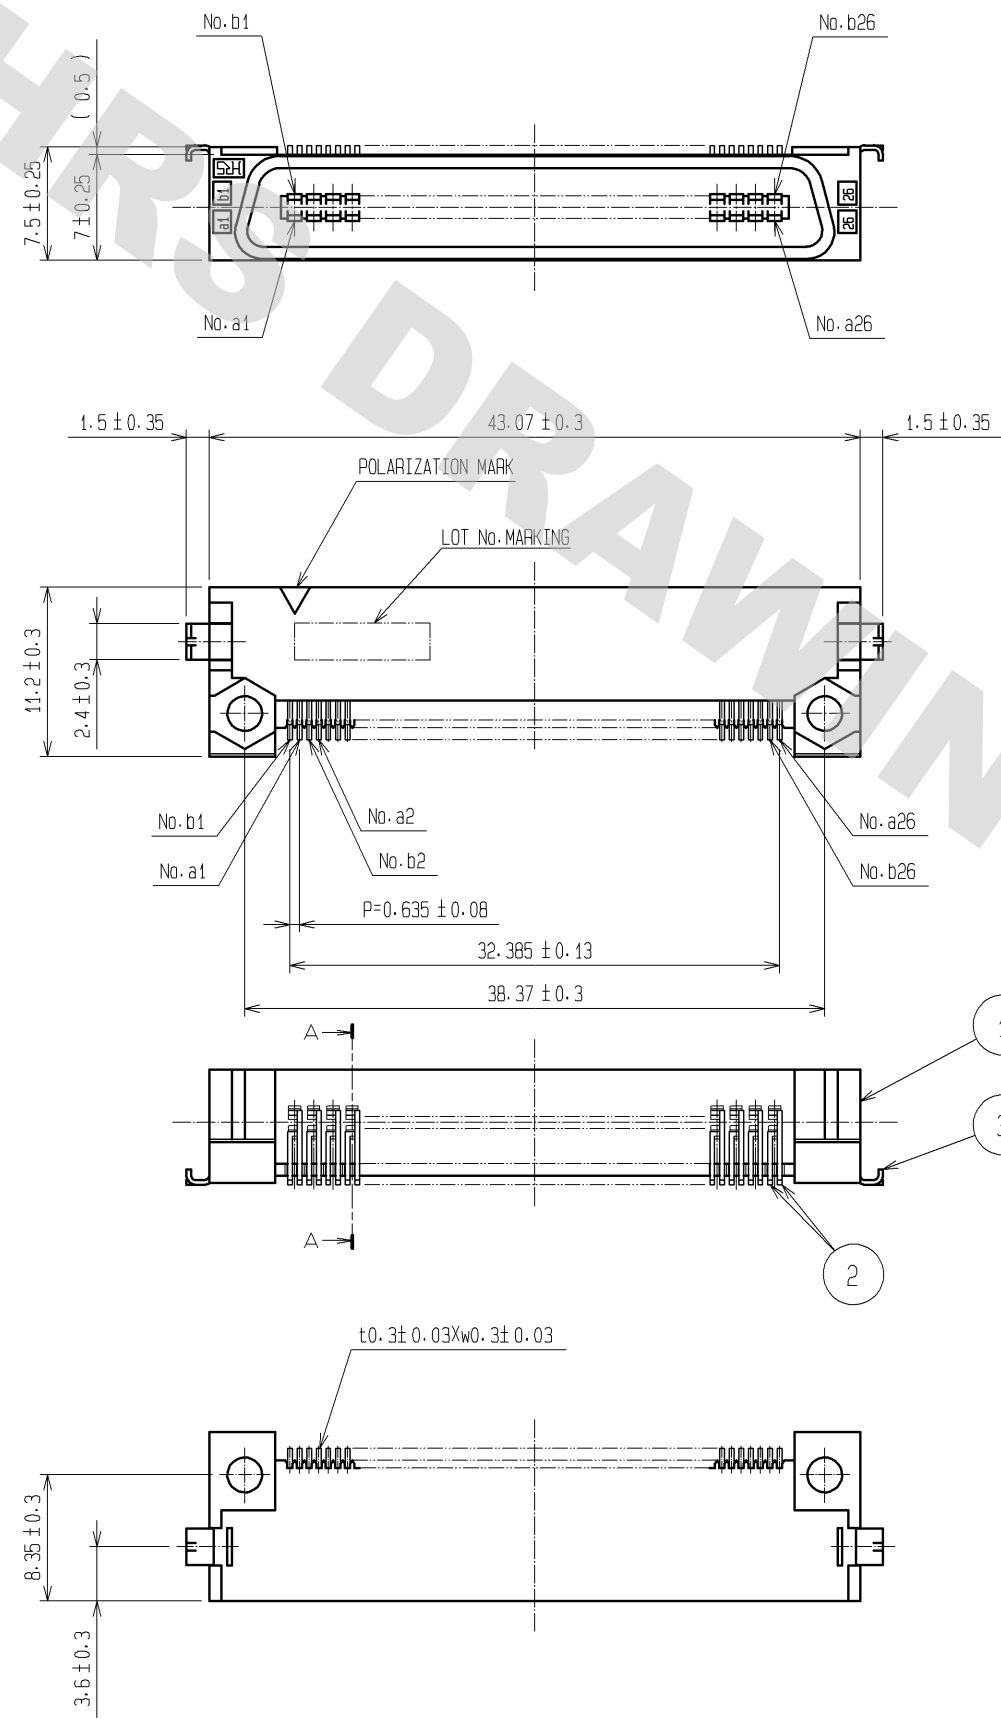

RECOMMENDED P.C.B. LAND PATTERN
MOUNT SIDE (THICKNESS OF APPLICABLE BOARD: $t=1.6 \pm 0.1$)
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

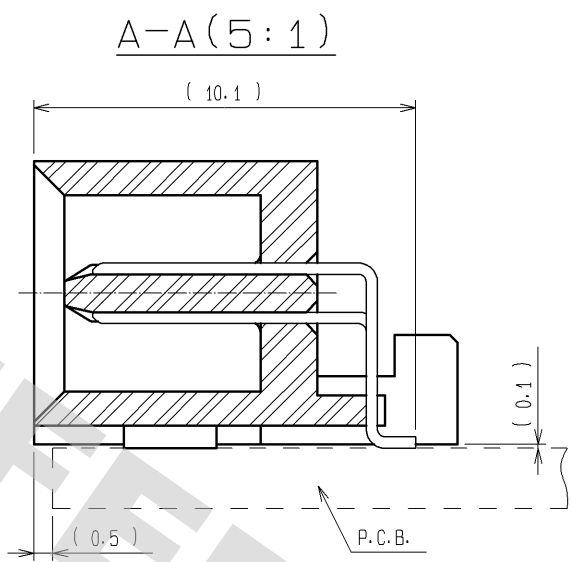

NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3	BRASS	TIN-PLATING	2	BRASS	CONTACT AREA : GOLD 0.2μm min.
1	POLYPHENYLENE SULFIDE	LIGHT BROWN (UL94V-0)			LEAD AREA : TIN-PLATING 2μm min.
					UNDER PLATING : NICKEL 1μm min.
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA 09. 04. 02	DRAWING NO. EDC3-150360-21		
		CHECKED : HT. YAMAGUCHI 09. 04. 02	PART NO. FX2A-52P-0. 635SH<71>		
		DESIGNED : SY. KAMIGA 09. 04. 02	CODE NO. CL572-2774-4-71		
		DRAWN : HK. SUNADORI 09. 04. 02	1/1		