


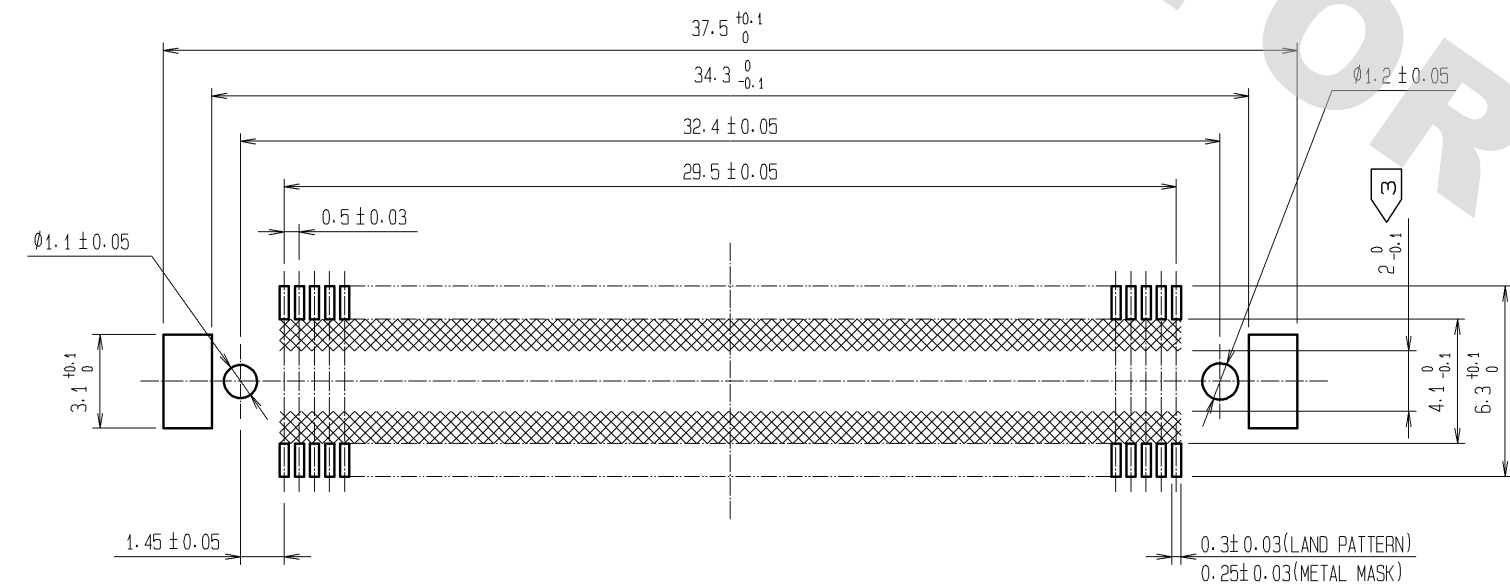
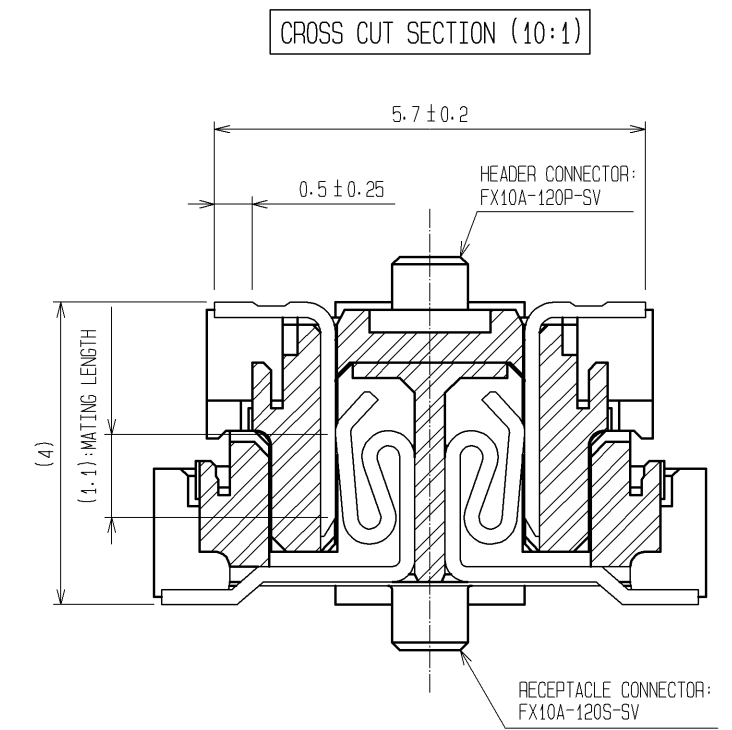


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012


- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ③ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
 - 4 EMBOSS CARRIER TAPE PACKAGE IS APPLIED ON THIS PRODUCT. PLEASE REFER TO THE SHEET 2/2 FOR THE DETAILS.
 - 5 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3	PHOSPHOR BRONZE	TIN-PLATING			
2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min. LEAD AREA : TIN-PLATING 1μm min. UNDER PLATING : NICKEL 1μm min.	5	POLYESTER	TOP COVER TAPE
1	LCP	BEIGE UL94V-0	4	POLYSTYRENE	EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 4 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI	10. 07. 29	DRAWING NO.	EDC3-151953-21
		CHECED : HT. YAMAGUCHI	10. 07. 29	PART NO.	FX10A-120P-SV(91)
		DESIGNED : SY. KAMIGA	10. 07. 29	CODE NO.	CL570-0042-2-91
		DRAWN : HK. SUNADORI	10. 07. 28		 1/2


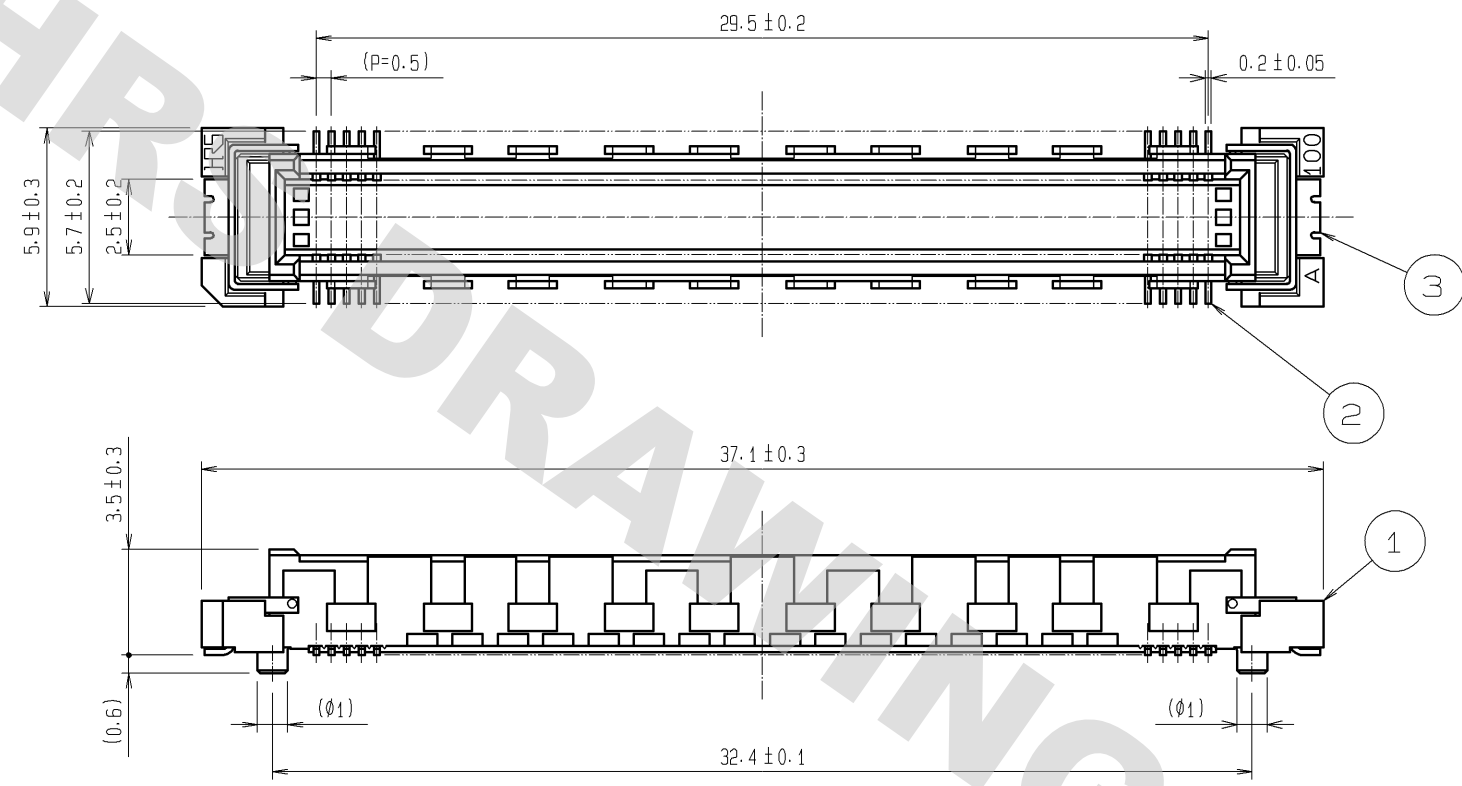


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012


DRAWING FOR PACKING(2:1)

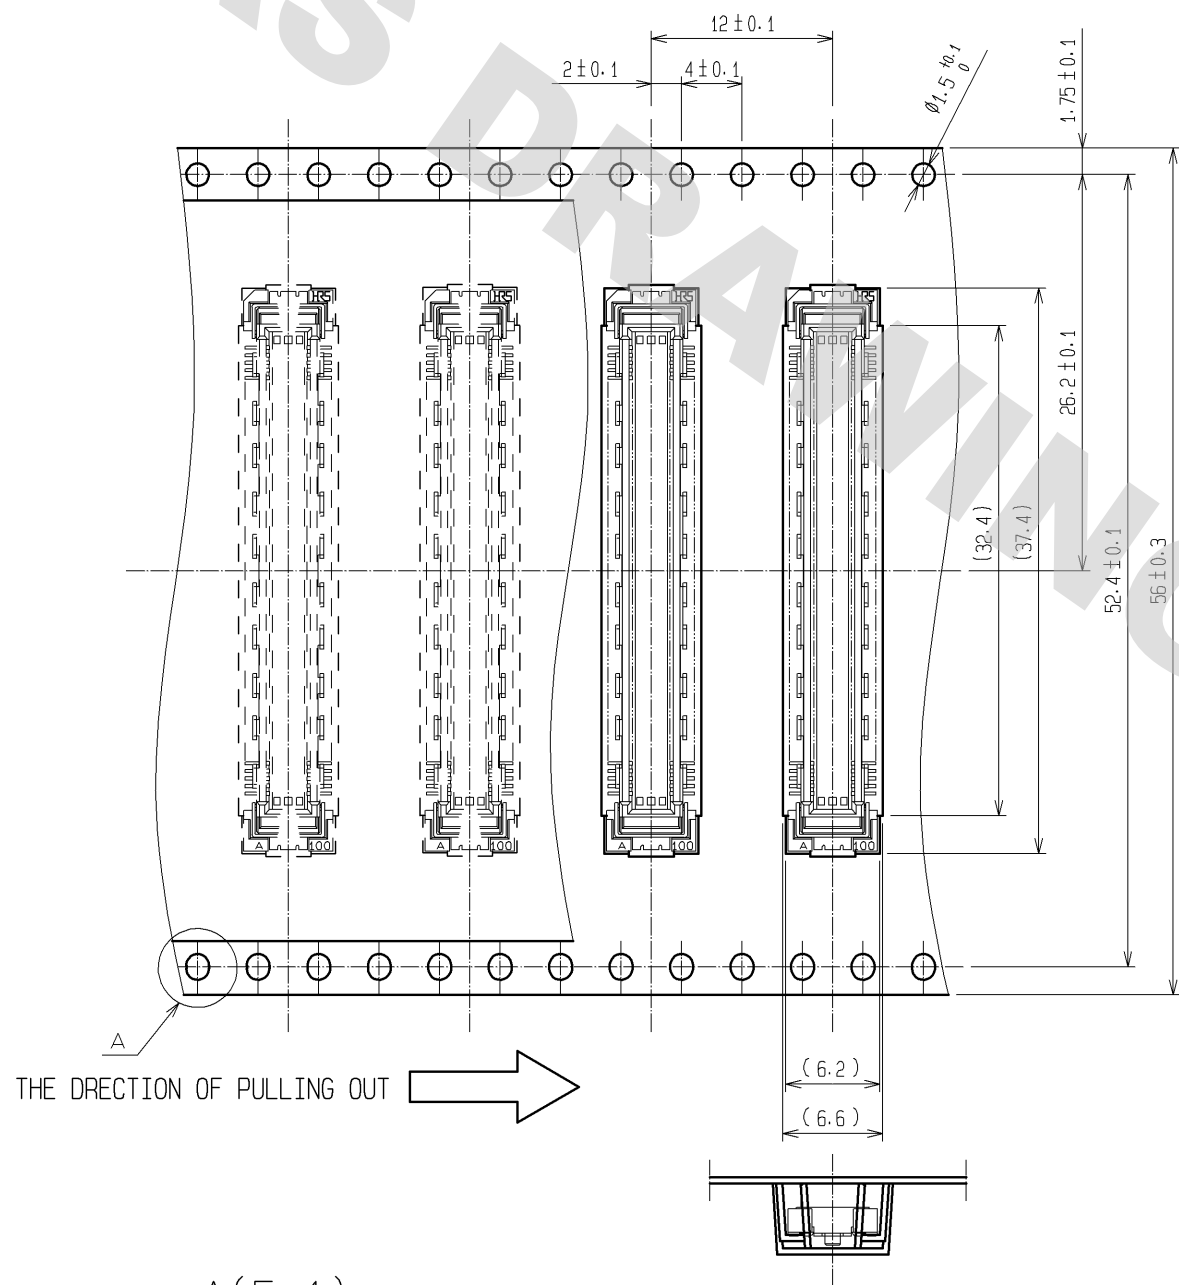

A (5:1)

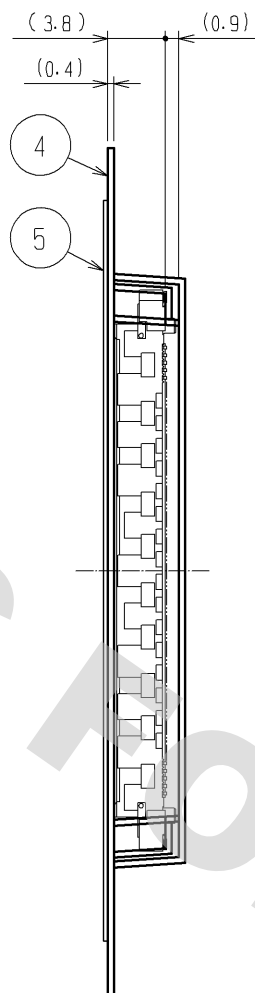

REELED DIMENSION(Free)

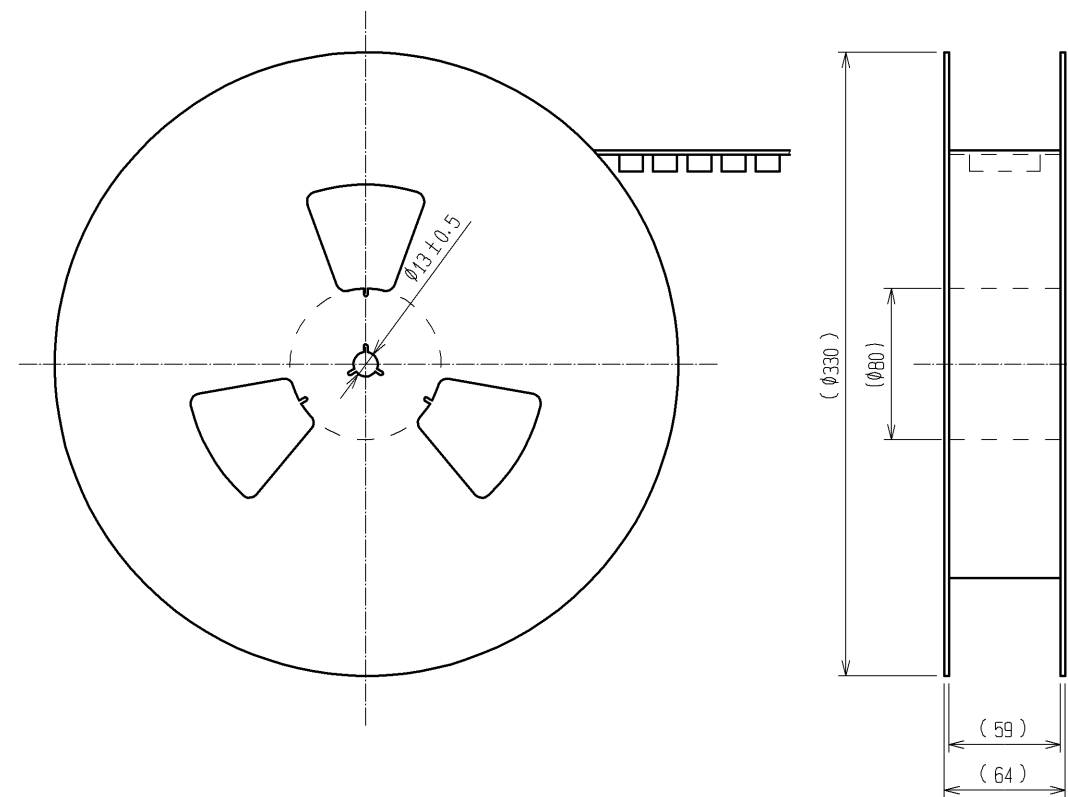

- NOTES
- 1 REEL : 1000 CONNECTORS.
 - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - 3 THIS PRODUCT HAS NO POLAVITY TO TAPE AND REEL PACKAGING.
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS

DRAWING NO.	EDC3-151953-21
PART NO.	FX10A-120P-SV(91)
CODE NO.	CL570-0042-2-91

2/2