

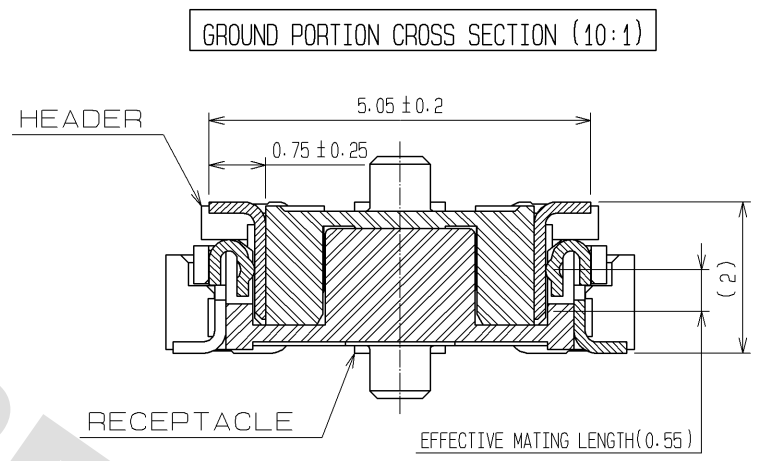
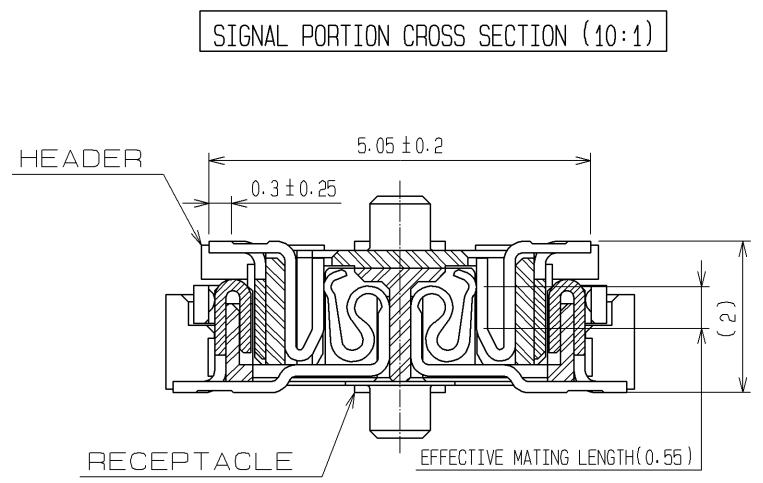


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

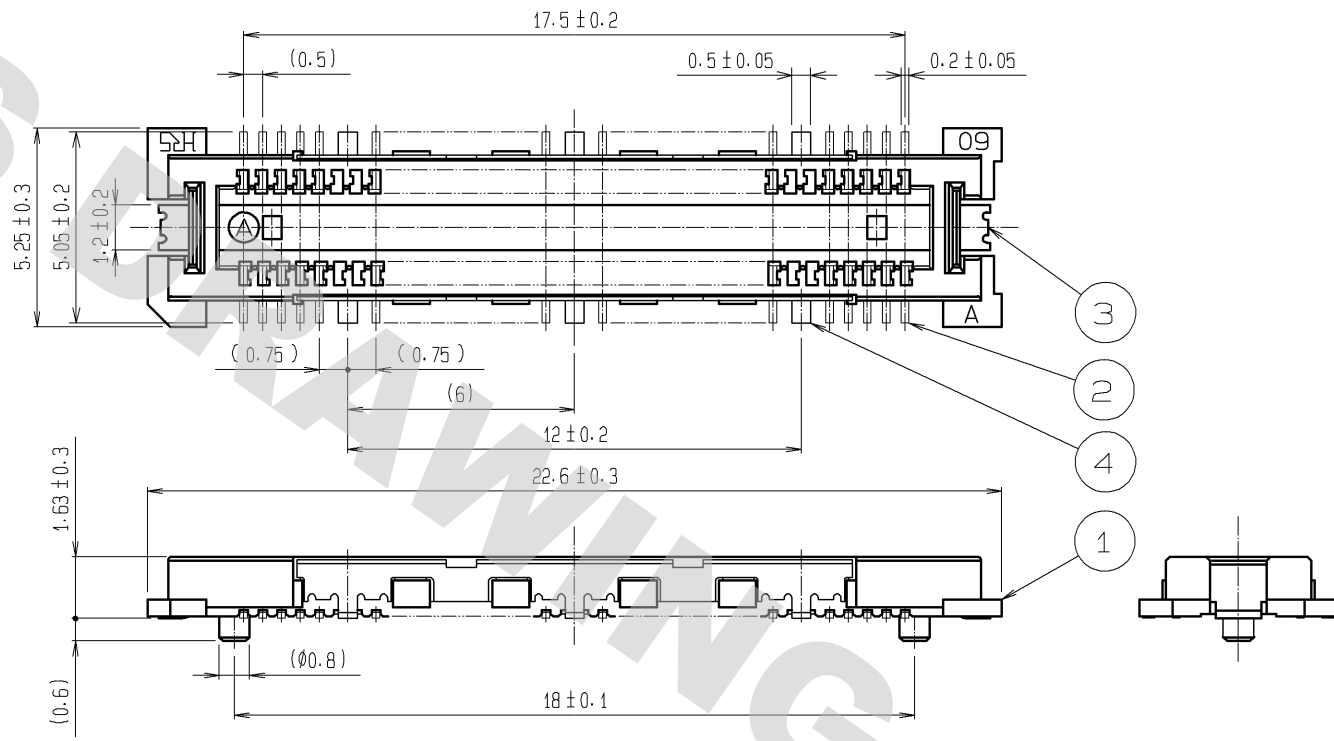


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

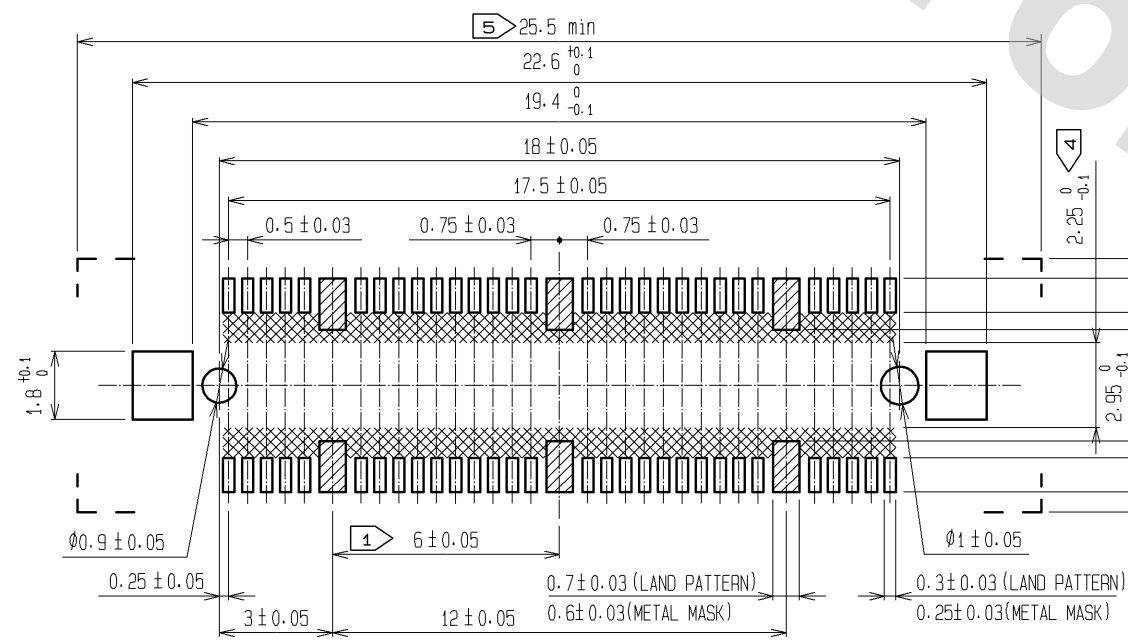

- NOTES
- 1 6 HATCHED PARTS: GROUND CIRCUIT.
 - 2 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 4 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 5 DO NOT MOUNT OTHER DEVICES ONTO AREA, OR MATING PAIR CANNOT BE MATED.
 - 6 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.



3, 4	PHOSPHOR BRONZE	TIN PLATING							
2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm min.							
		LEAD AREA : GOLD FLASH							
1	LCP	UNDER PLATING : NICKEL 1μm min.	6	PET					(TOP COVER TAPE)
		BEIGE UL94V-0	5	PS					(EMBOSSED CARRIER TAPE)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS				
UNITS mm		SCALE 5 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE		
				APPROVED : HS. OKAWA 09.05.22				DRAWING NO. EDC3-152092-21	
				CHECKED : HT. YAMAGUCHI 09.05.22				PART NO. FX11LA-60P/6-SV(91)	
				DESIGNED : YN. TAKANO 09.05.21				CODE NO. CL573-0002-7-91	
				DRAWN : HK. SUNADORI 09.05.20					1/2

DRAWING FOR PACKING(2:1)

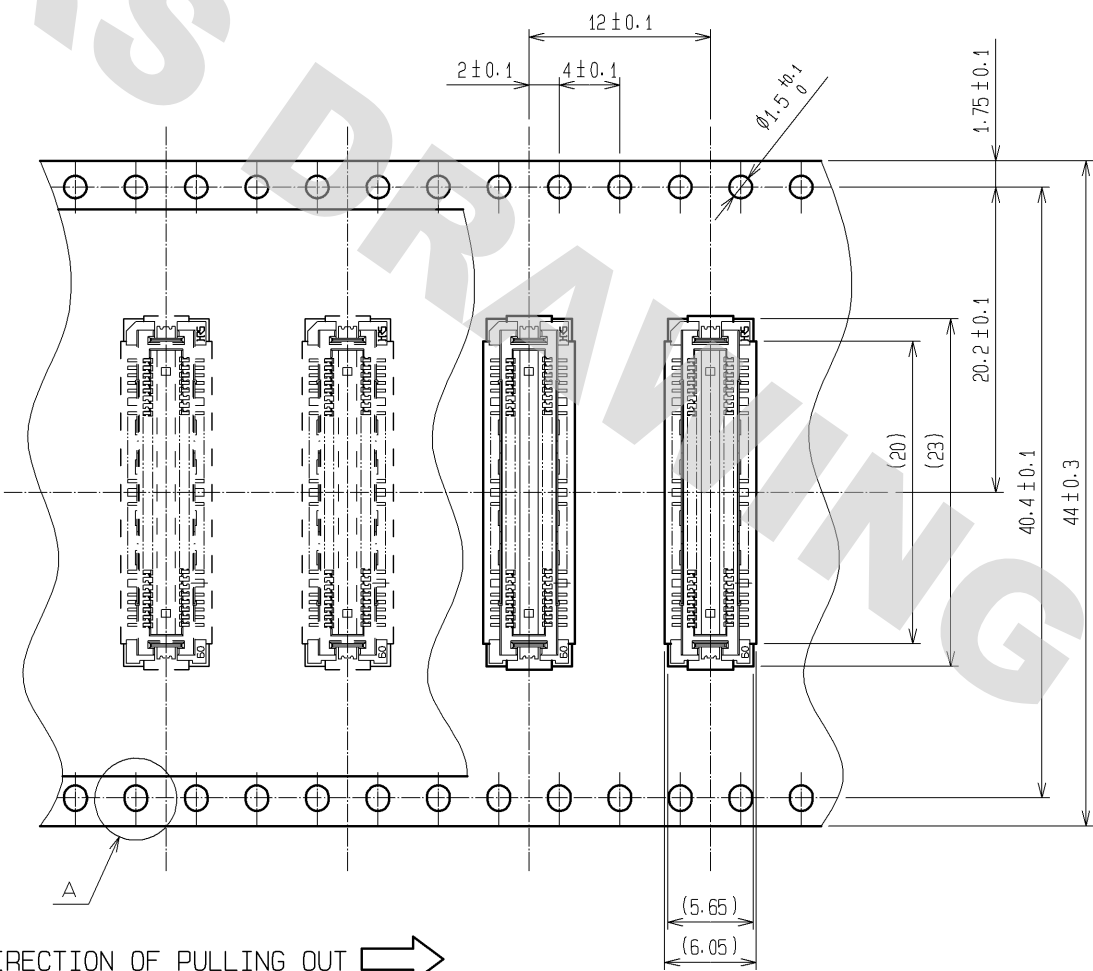


THE DIRECTION OF PULLING OUT →

A(5:1)

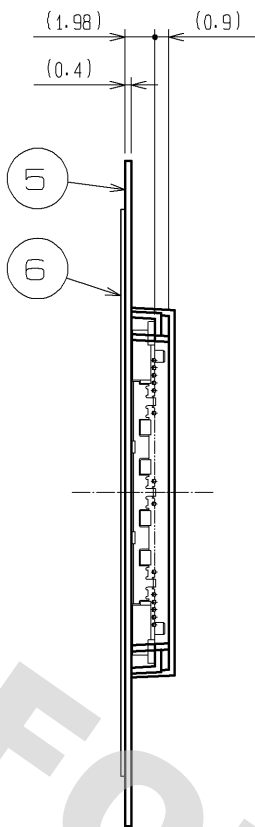

REELED DIMENSION(Free)

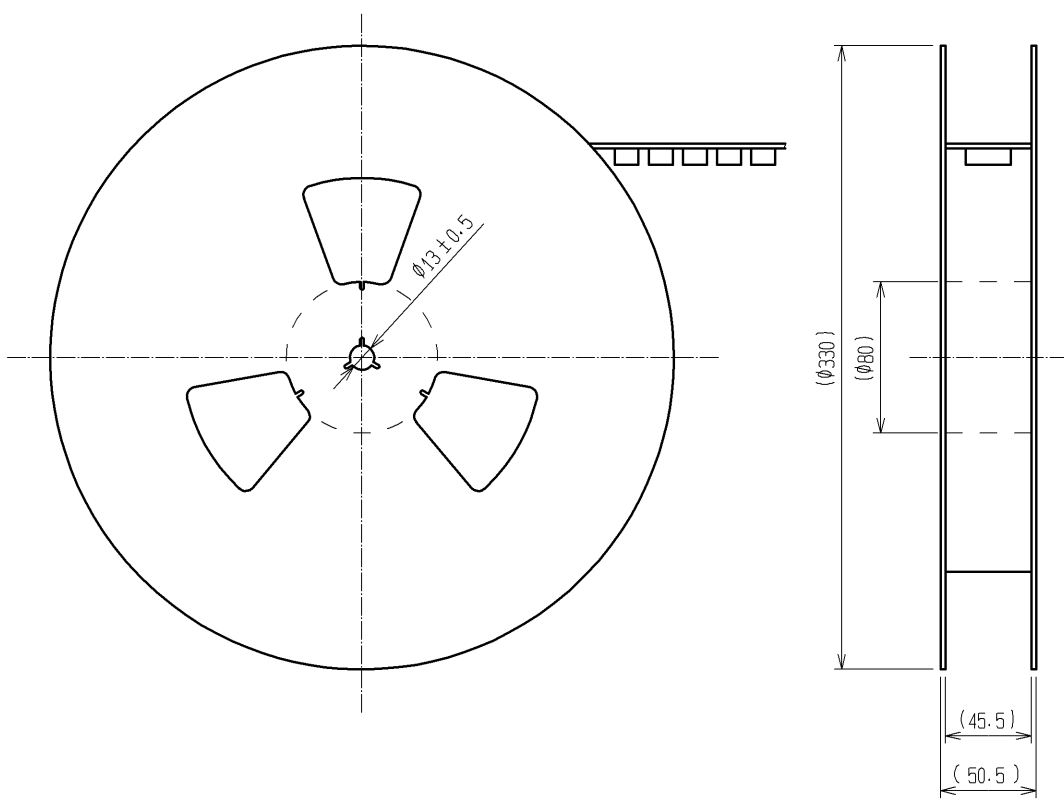

- NOTES
- 1 REEL : 1000 CONNECTORS.
 - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - 3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS

DRAWING NO.	EDC3-152092-21
PART NO.	FX11LA-60P/6-SV(91)
CODE NO.	CL573-0002-7-91

2/2