




DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

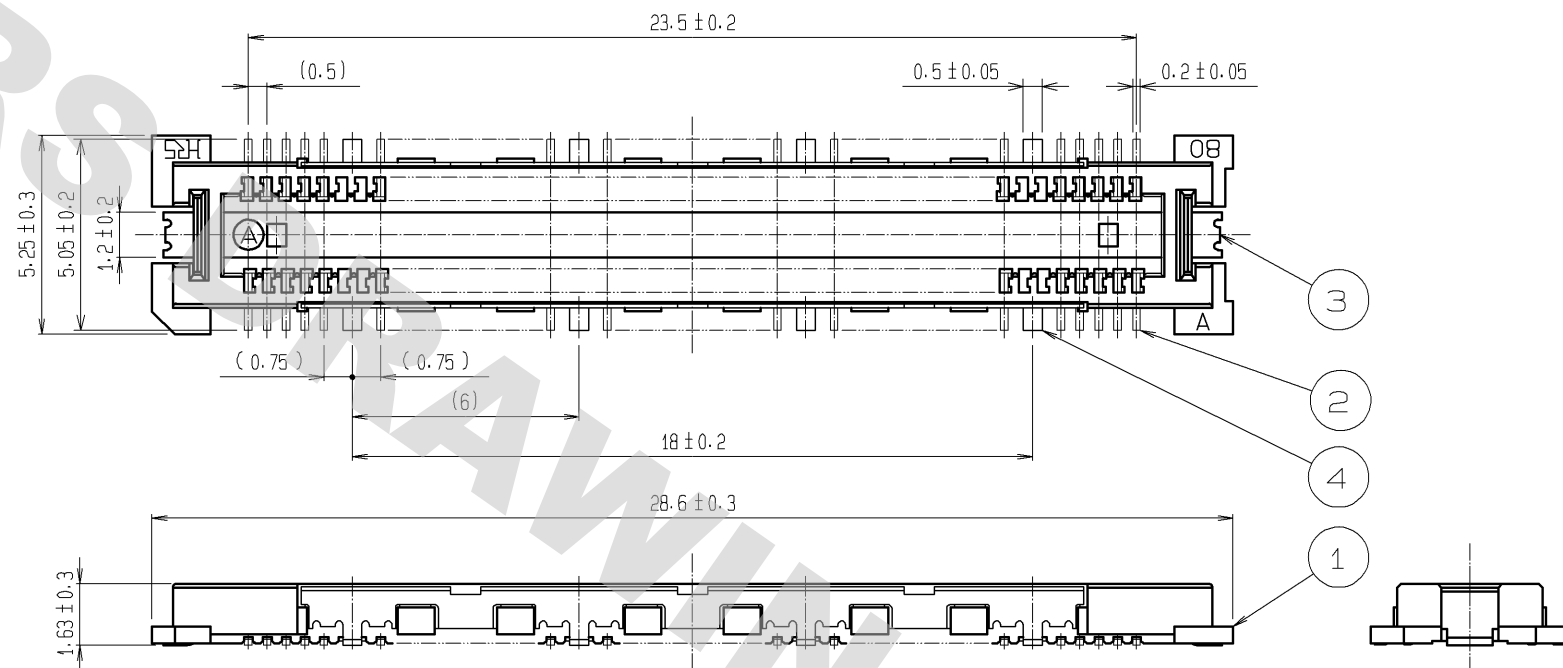


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

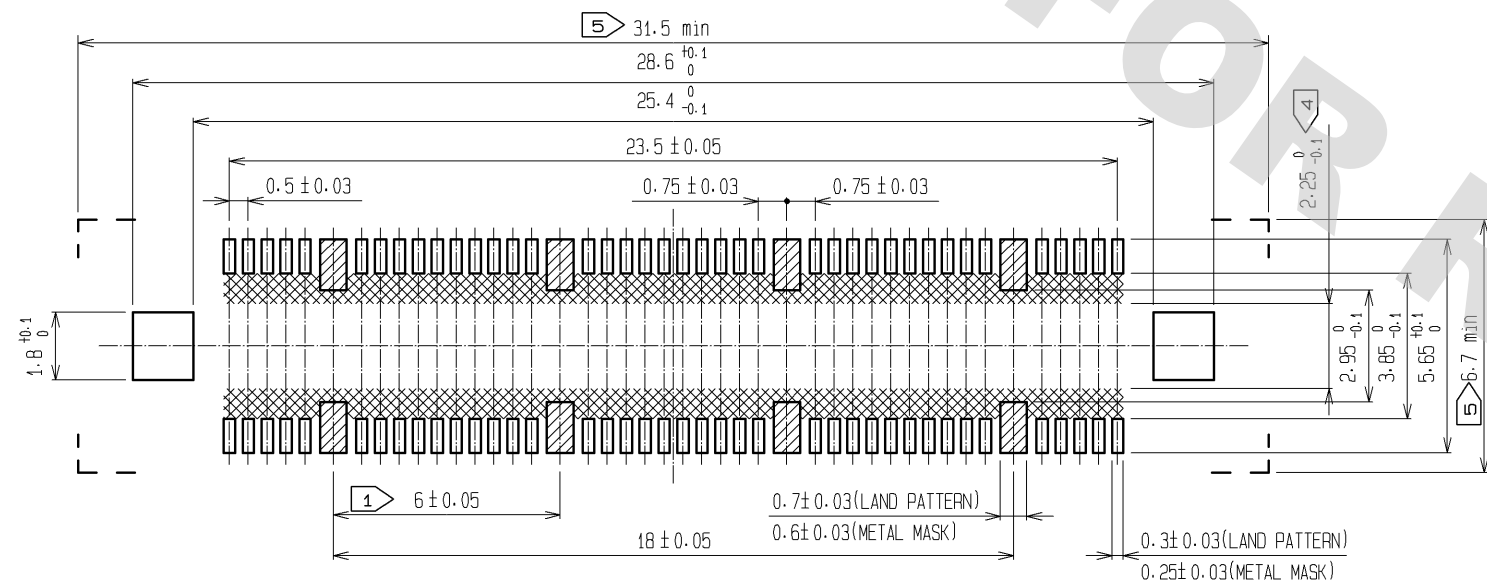

SIGNAL PORTION CROSS SECTION (10:1)

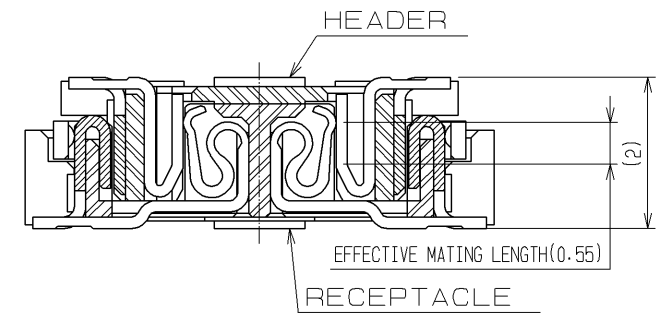


GROUND PORTION CROSS SECTION (10:1)

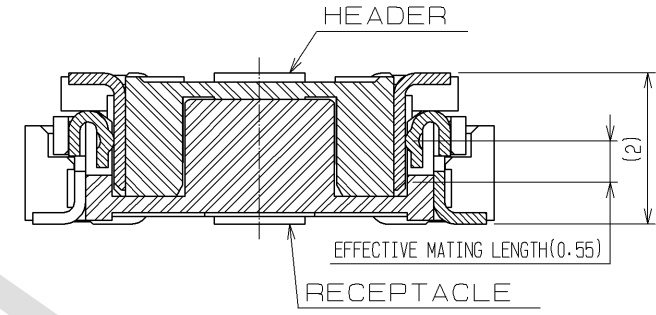


- NOTES
- ① 8 HATCHED PARTS: GROUND CIRCUIT.
 - ② SMT LEAD-COPLANARITY: 0.1 MAX.
 - ③ THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ④ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - ⑤ DO NOT MOUNT OTHER DEVICES ONTO AREA, OR MATING PAIR CANNOT BE MATED.
 - ⑥ TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - ⑦ THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3, 4	PHOSPHOR BRONZE	TIN PLATING			
2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm min.	7	POLYIMIDE	(TAPE FOR VACUUM PICKUP)
		LEAD AREA : GOLD 0.05μm min.	6	PET	TOP COVER TAPE
1	LCP	UNDER PLATING : NICKEL 1μm min.	5	PS	EMBOSSED CARRIER TAPE
BEIGE	UL94V-0				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
		APPROVED : HS. OKAWA	09.06.30	DRAWING NO.	EDC3-152097-22
		CHECKED : HT. YAMAGUCHI	09.06.30	PART NO.	FX11LB-80P/8-SV(92)
		DESIGNED : YN. TAKANO	09.06.30	CODE NO.	CL573-0013-3-92
		DRAWN : HK. SUNADORI	09.06.29		


DRAWING FOR PACKING(2:1)

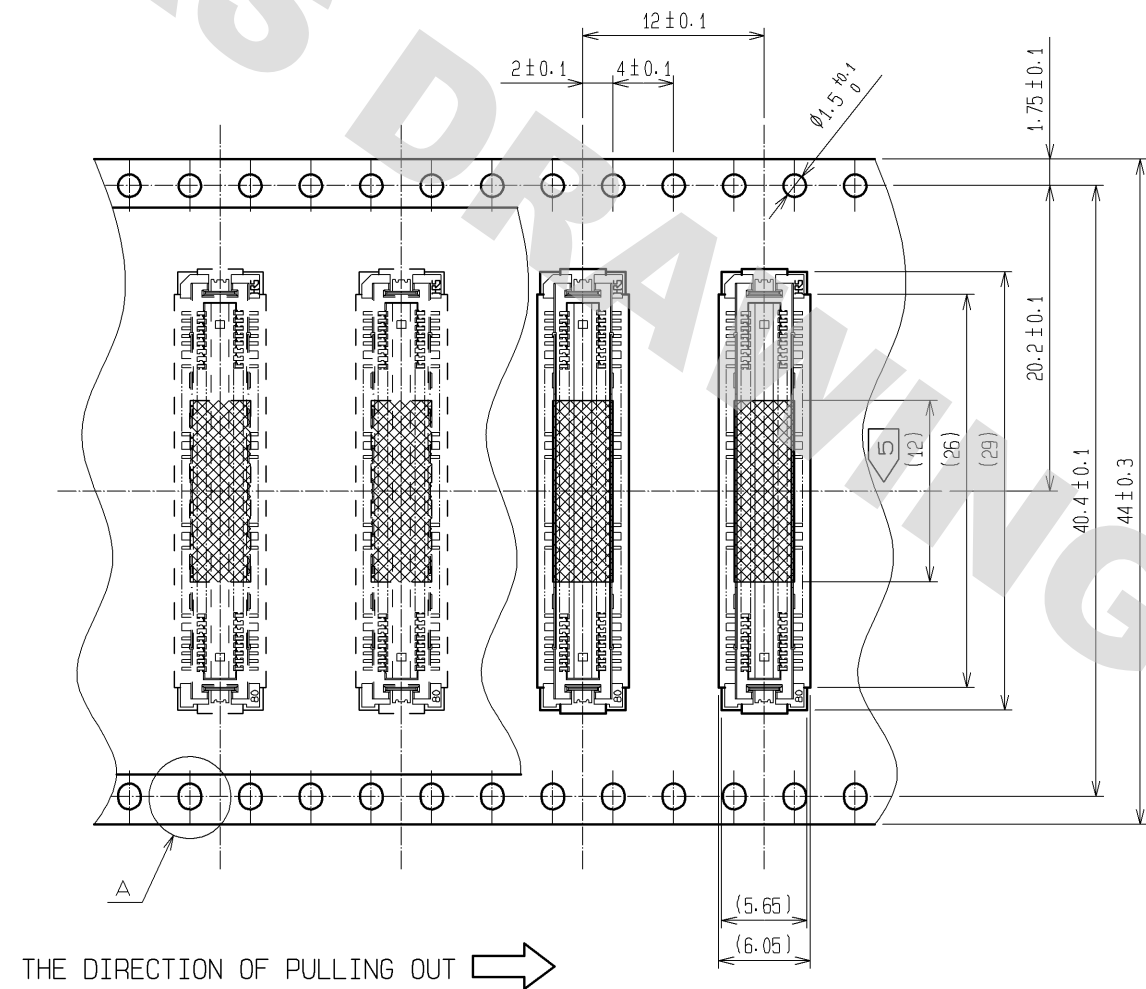

A (5:1)



DETAIL FOR VACUUM PICKUP (5:1)



- NOTES
- 1 REEL: 1000 CONNECTORS.
 - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - 3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 5 REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

HRS

DRAWING NO.	EDC3-152097-22
PART NO.	FX11LB-80P/8-SV(92)
CODE NO.	CL573-0013-3-92

2/2