




DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

A
B
C
D
E
F

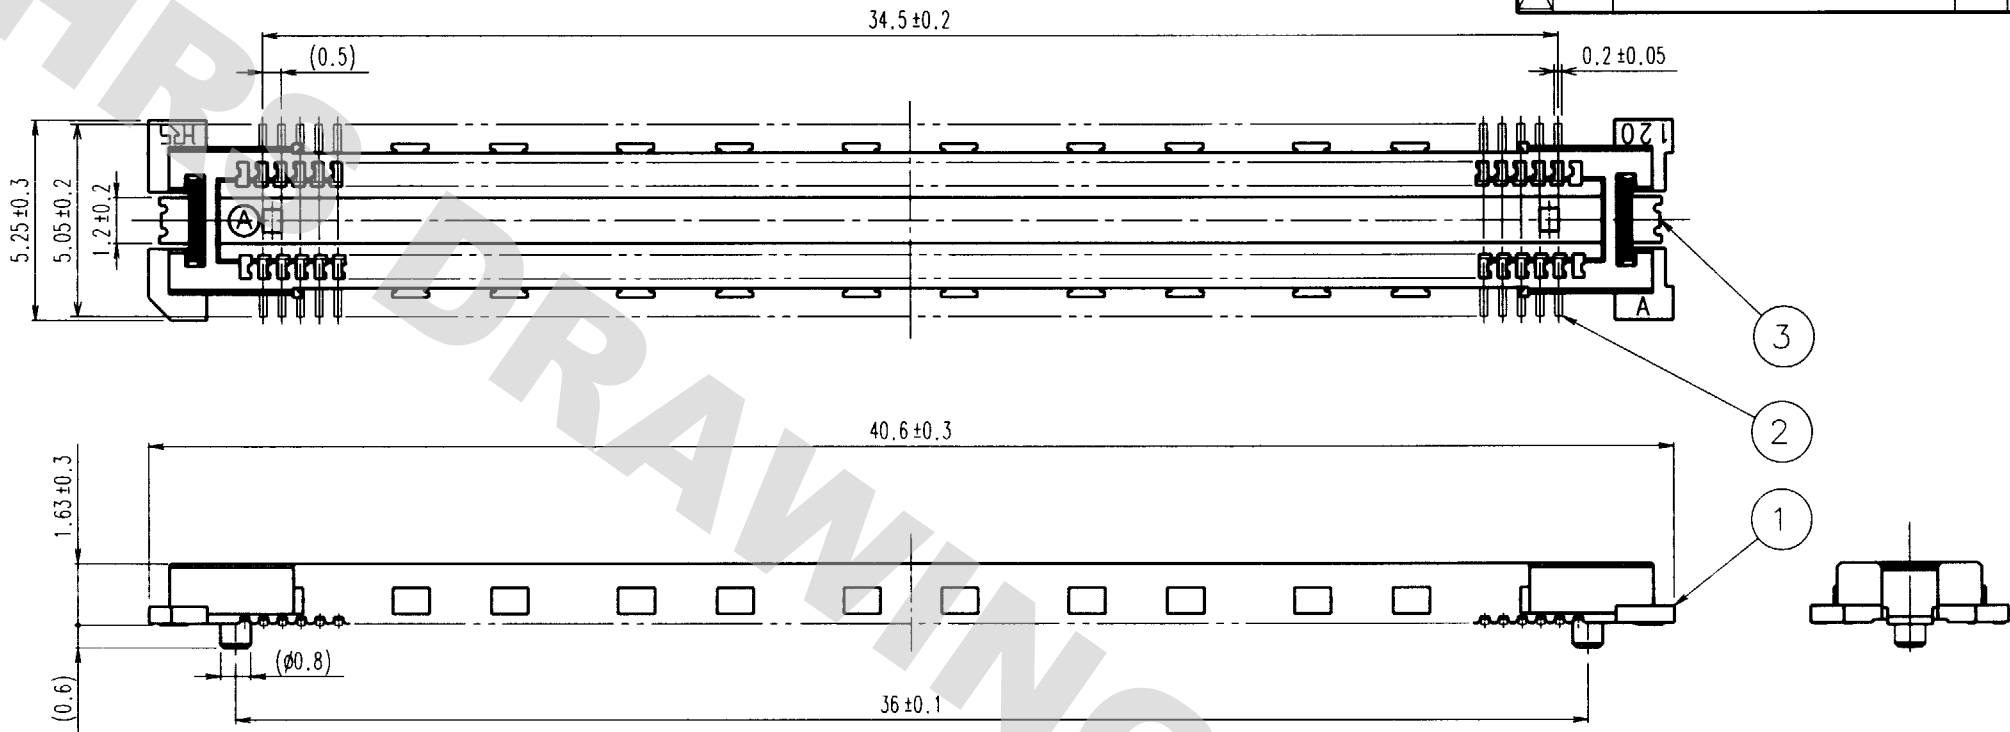

RECOMMENDED LAND PATTERN DIMENSION OF PCB

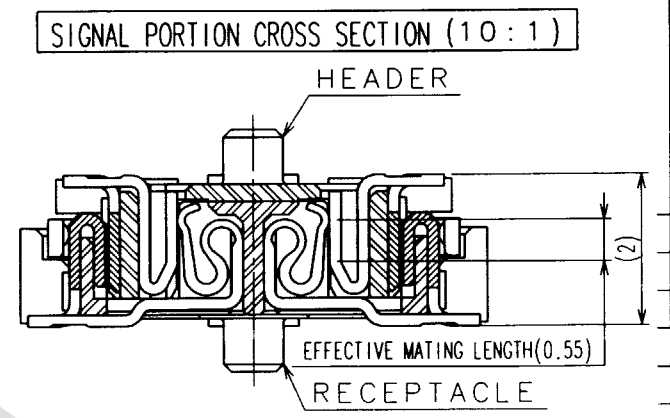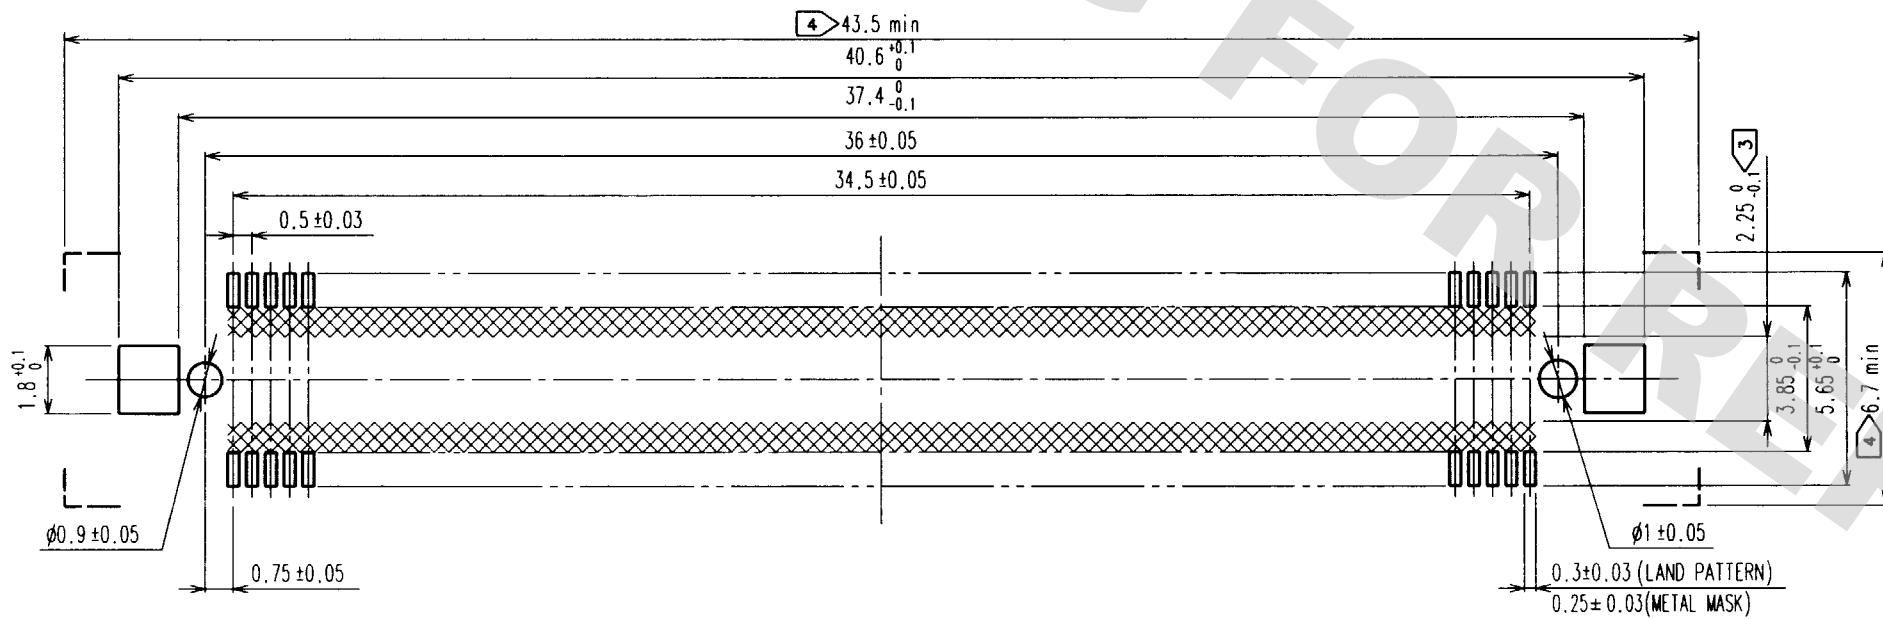

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATING PAIR CANNOT BE MATED.
 - 5 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1 μm) OVER NICKEL	3	PHOSPHOR BRONZE	TIN PLATED
1	LCP	BEIGE UL94V-0			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL		DRAWN CL	DESIGNED M. Ishida	CHECKED M. Ishida	APPROVED Z. Yoshimura
SCALE 5 : 1		DRAWING NO. EDC3-152103-01		PART NO. FX11LA-140P-SV (21)	
UNITS mm		HRS HIROSE ELECTRIC CO., LTD.		CODE NO. CL573-0045-0-21	
				1/2	

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

