
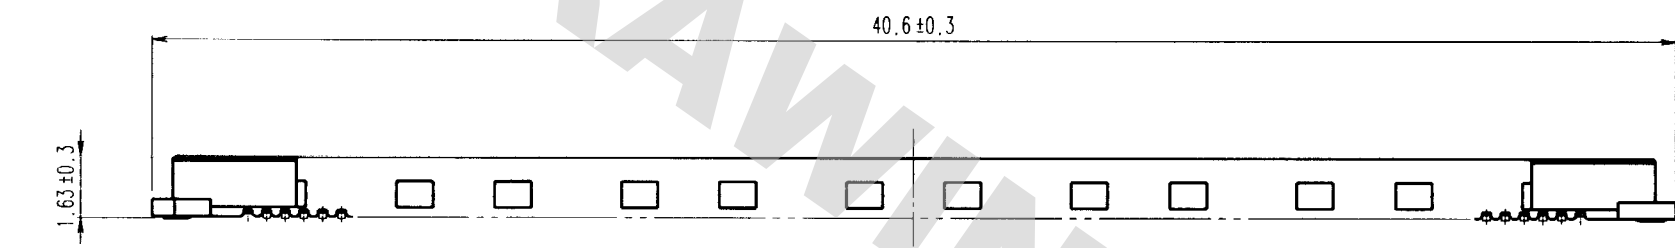



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK


A
B
C
D
E
F

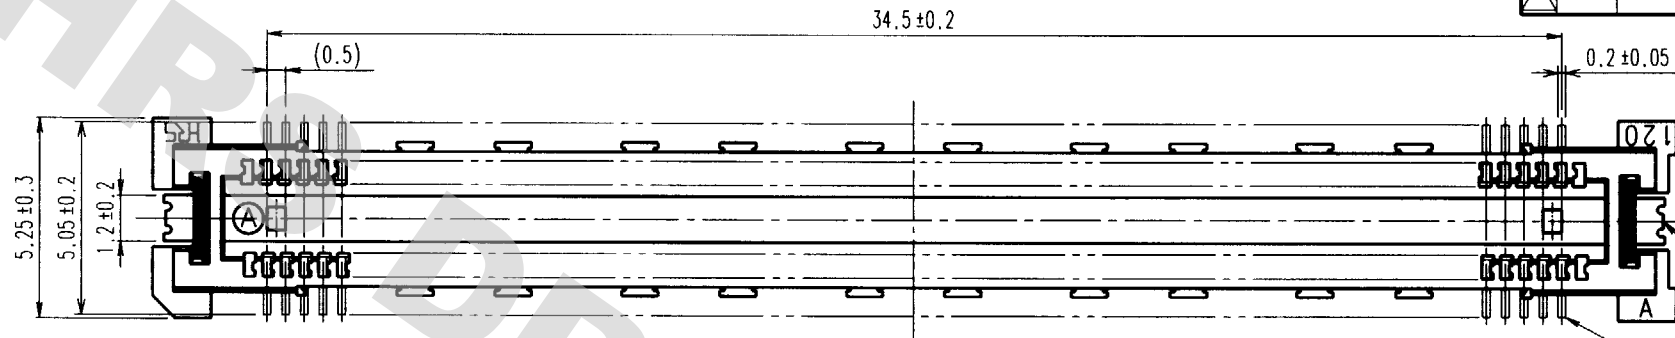

RECOMMENDED LAND PATTERN DIMENSION OF PCB

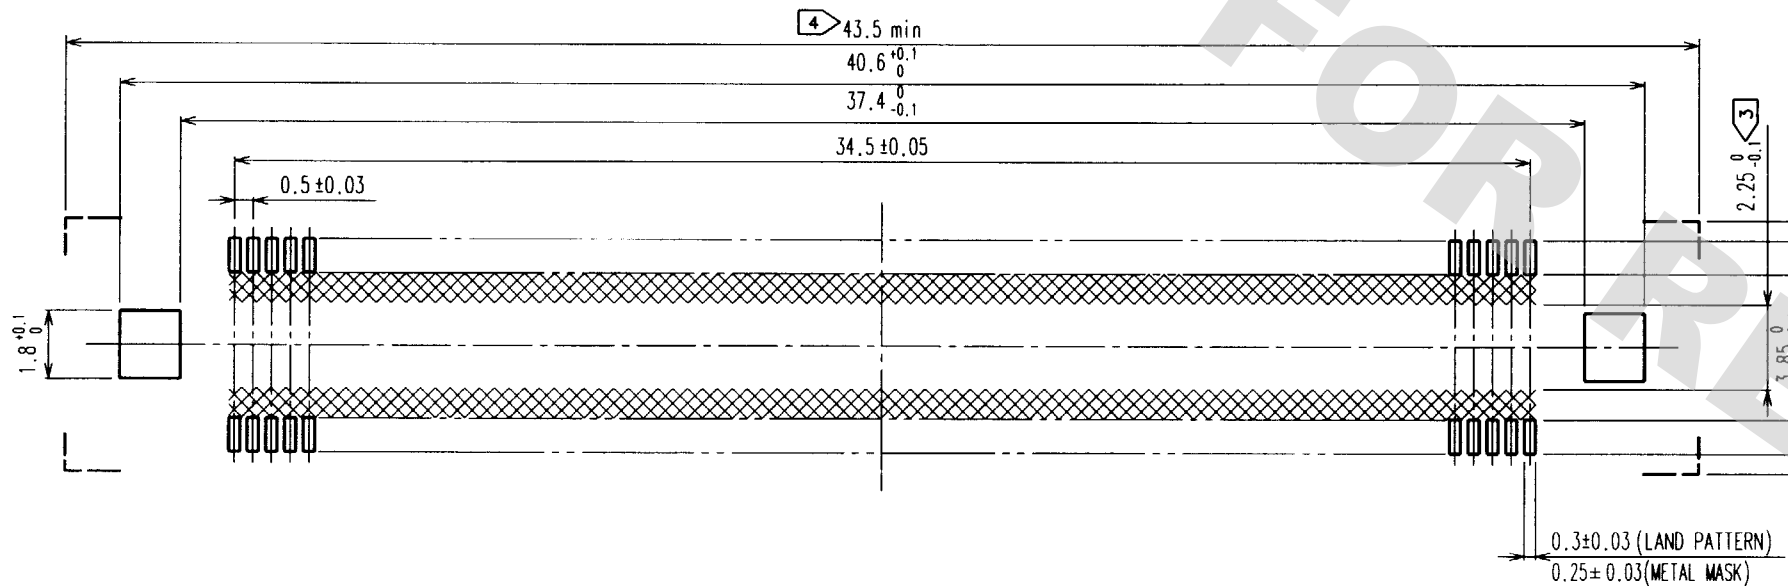

SIGNAL PORTION CROSS SECTION (10:1)

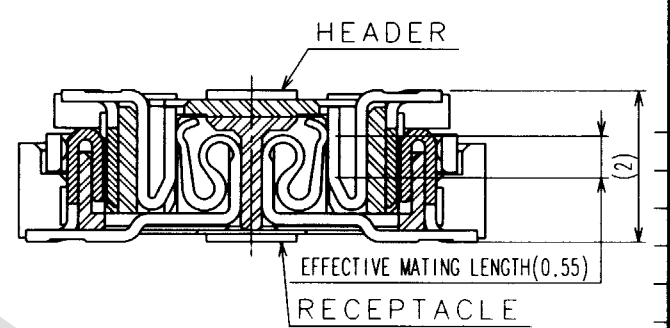

- NOTES
- 1 SMT LEAD-COPLANARITY:0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATING PAIR CANNOT BE MATED.
 - 5 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

2	COPPER ALLOY	CONTACT AREA:GOLD (0.1μm) OVER NICKEL							
		LEAD:GOLD FLASH OVER NICKEL							
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS				
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED		
			<i>Matsubara</i>	<i>Matsubara</i>	<i>M. Sakata</i>	<i>T. Yoshimura</i>			
			99.10.25	99.10.25	99.10.26	99.10.26			
SCALE 5 : 1			DRAWING NO. EDC3-152107-01			PART NO. FX11LB-140P-SV (21)			
UNITS mm			HRS HIROSE ELECTRIC CO., LTD.			CODE NO. CL573-0055-3-21			1/2

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

