



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

A
B
C
D
E
F

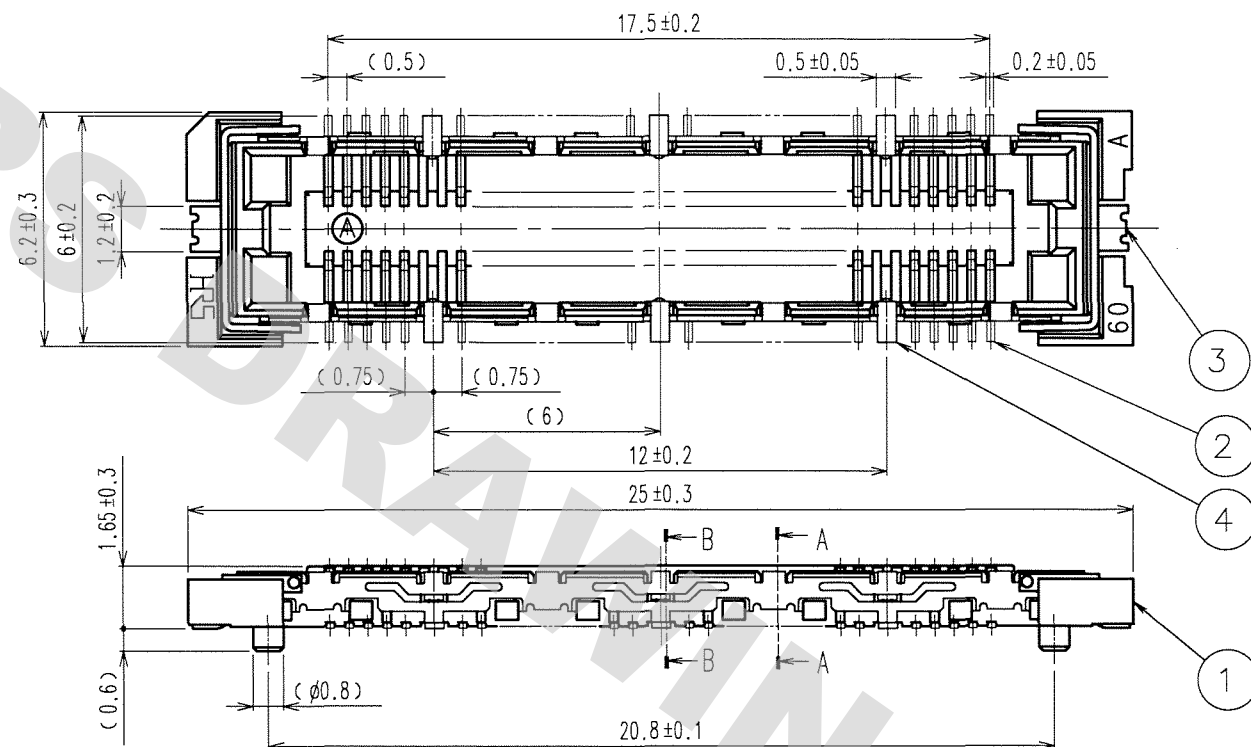


RECOMMENDED LAND PATTERN DIMENSION OF PCB

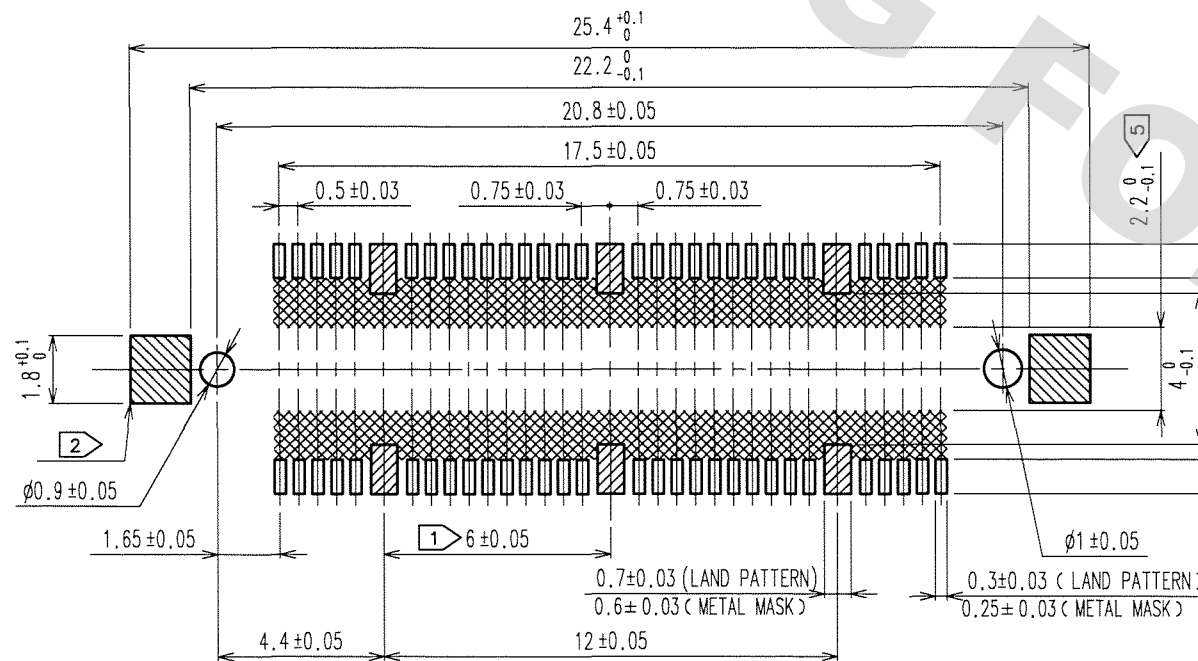


- NOTES
- 6 HATCHED PARTS: GROUND CIRCUIT.
 - 2 HATCHED PARTS: GROUND CIRCUIT.
 - SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

A-A (10:1)

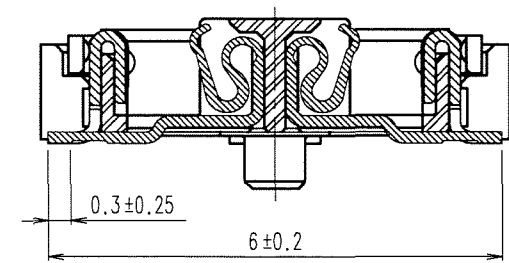

B-B (10:1)

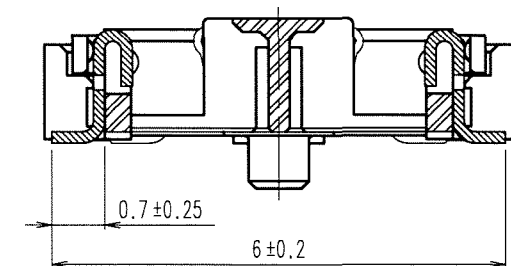

4	PHOSPHOR BRONZE	TIN-PLATING			2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min.
3	PHOSPHOR BRONZE	TIN-PLATING					LEAD AREA: GOLD FLASH
1	LCP	BEIGE UL94V-0					UNDER PLATING: NICKEL 1μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			A. SUZUKAWA	M. Yamura	K. Ogawa	H. Okawa	
			06.09.28	06.09.28	06.09.29	06.09.30	
DRAWING NO. EDC3-152108-22			PART NO. FX11LA-60S/6-SV(92)				
SCALE 5 : 1			CODE NO. CL573-0102-1-92				1/2
UNITS mm			HRS HIROSE ELECTRIC CO., LTD.				

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

