




DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

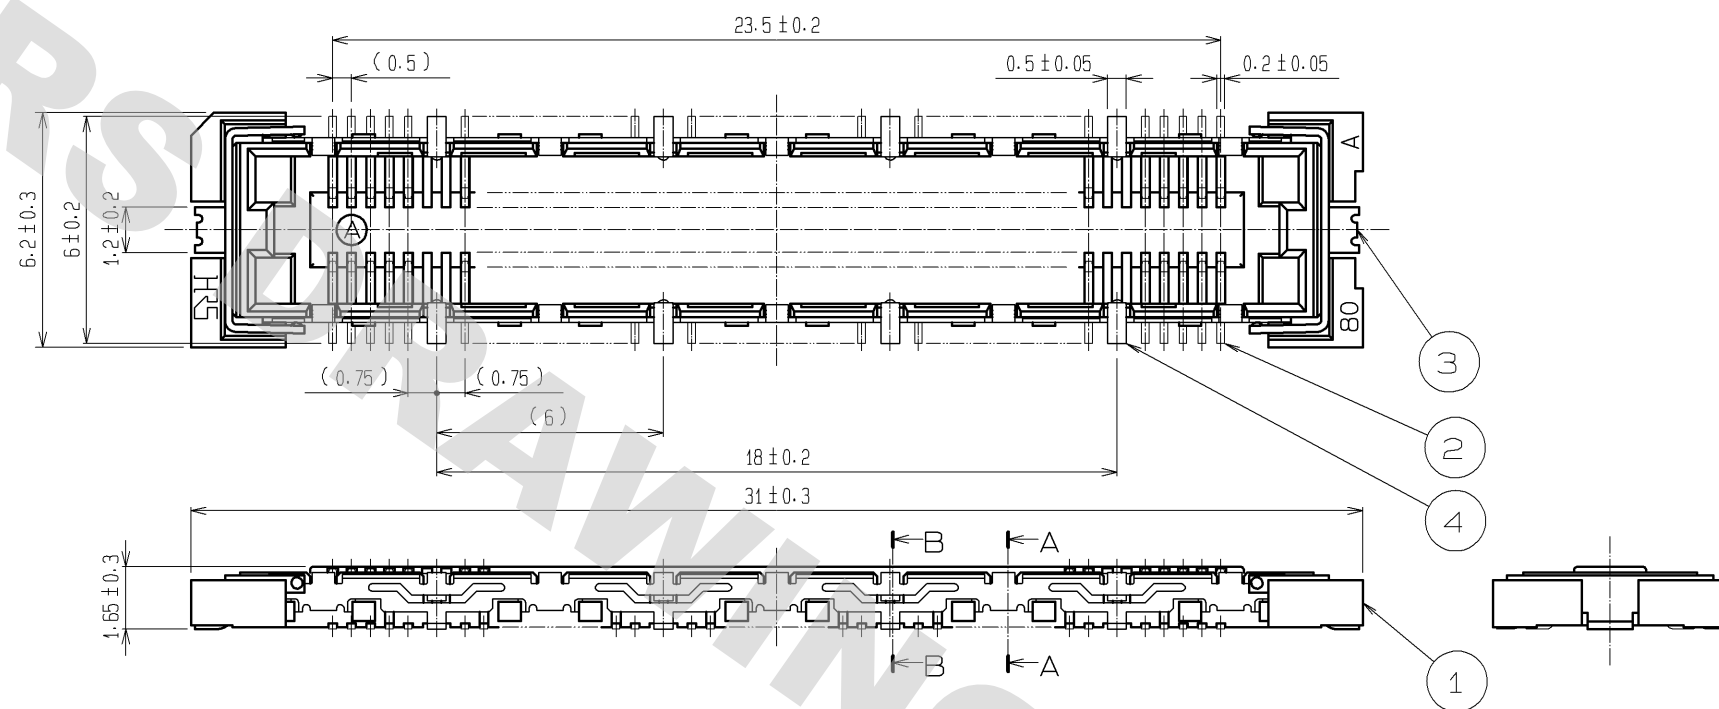


A-A (10 : 1)

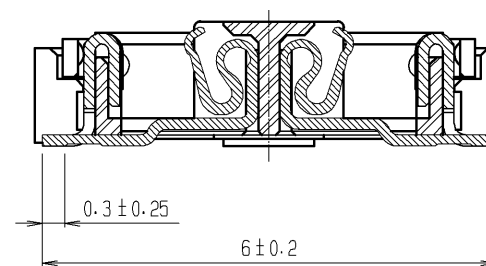

B-B (10 : 1)

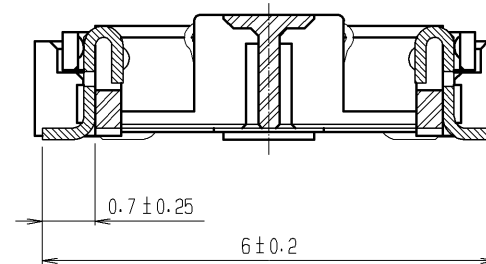

RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

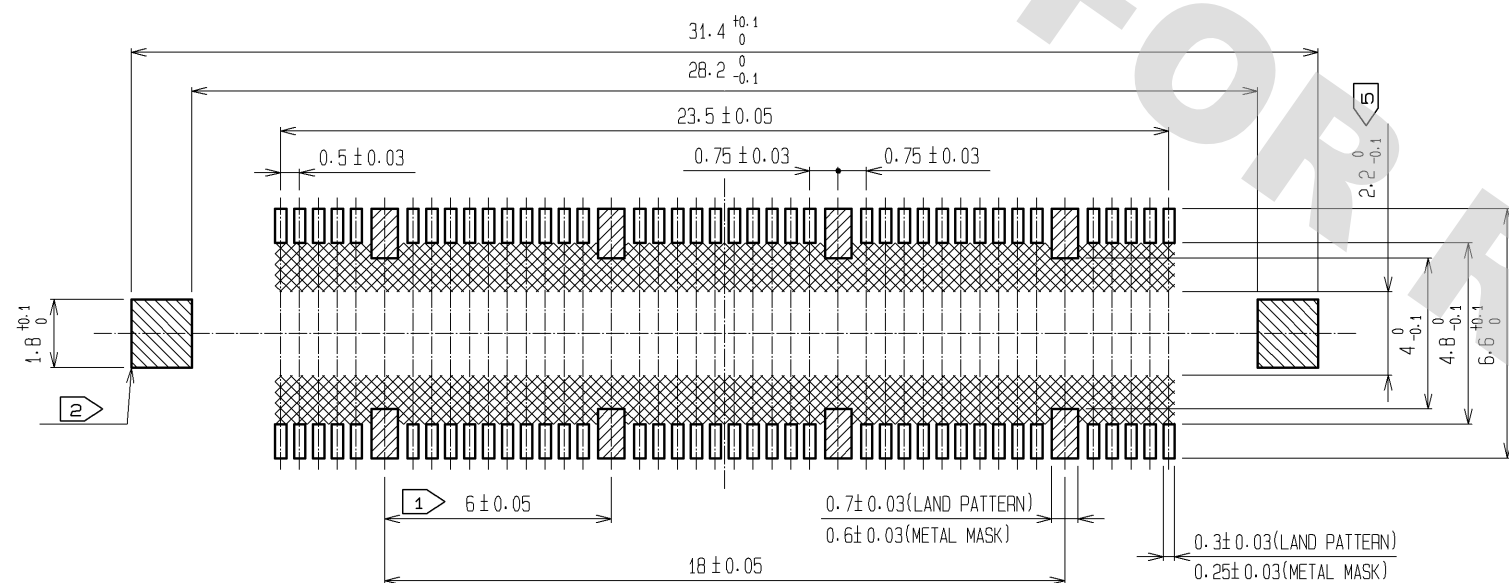


- NOTES
- 8 HATCHED PARTS: GROUND CIRCUIT.
 - 2 HATCHED PARTS: GROUND CIRCUIT.
 - SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND .OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.



3, 4	PHOSPHOR BRONZE	TIN PLATING			
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1µm min. LEAD AREA : GOLD 0.05µm min. UNDER PLATING : NICKEL 1µm min.	6	PET	(TOP COVER TAPE)
1	LCP	BEIGE UL94V-0	5	PS	(EMBOSSED CARRIER TAPE)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	10.11.30	DRAWING NO.	EDC3-152113-21
		CHECKED : HT. YAMAGUCHI	10.11.29	PART NO.	FX11LB-80S/8-SV(91)
		DESIGNED : SY. KAMIGA	10.11.29	CODE NO.	CL573-0113-8-91
		DRAWN : YJ. ASAO	10.11.29		1/2

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012


DRAWING FOR PACKING(2:1)

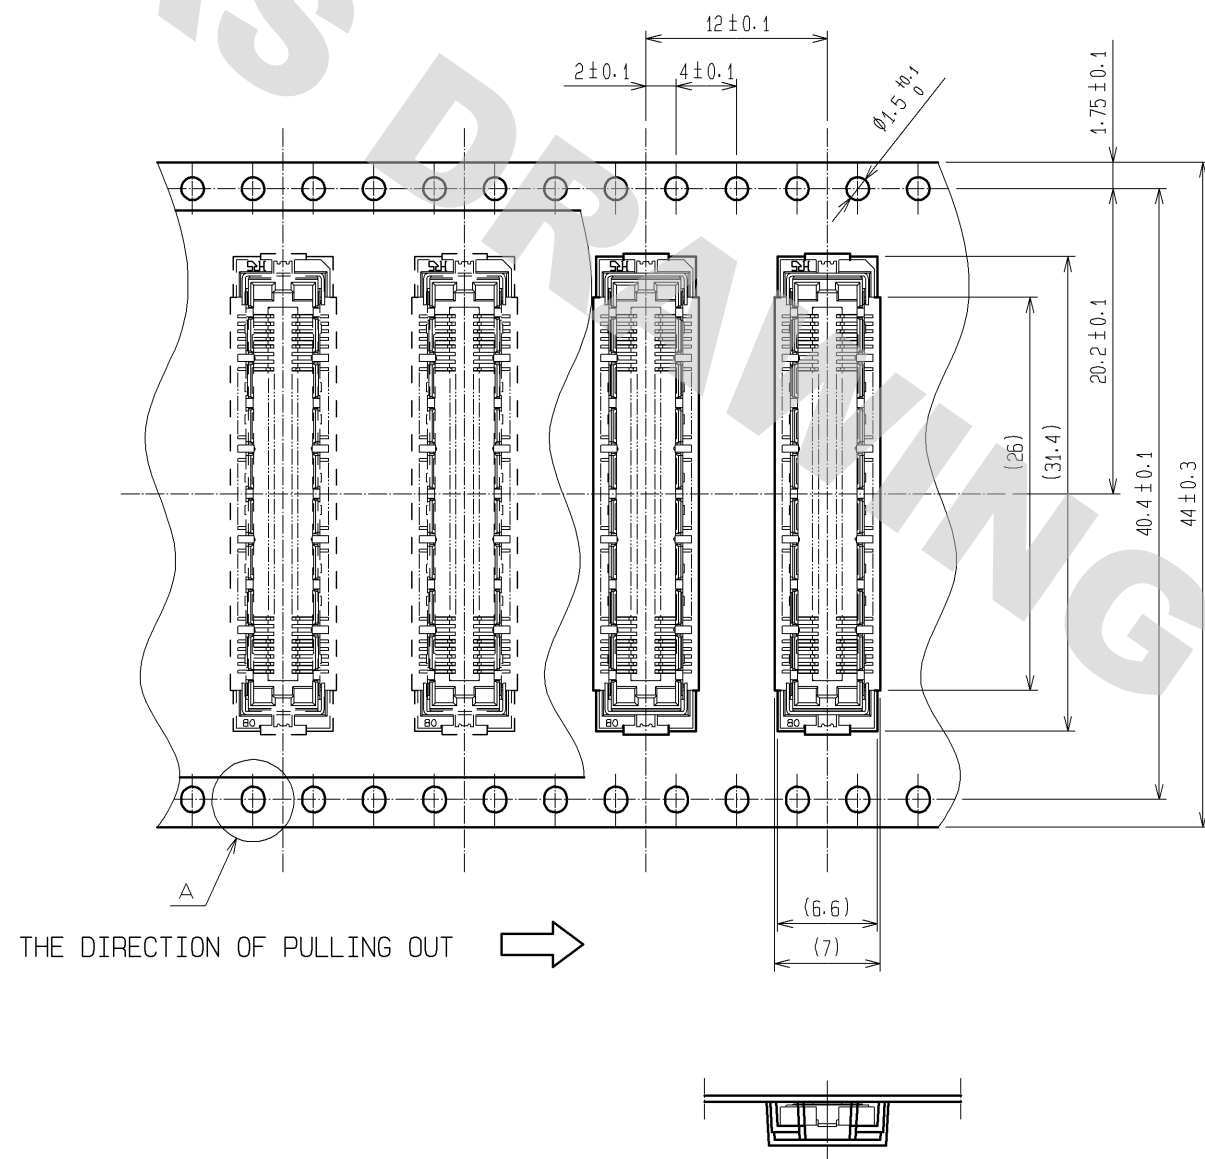

A(5:1)

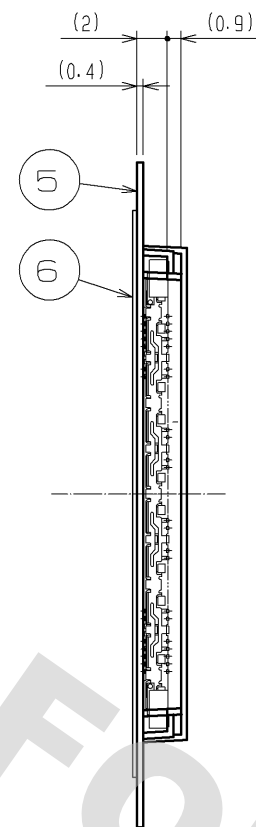

REELED DIMENSION(Free)

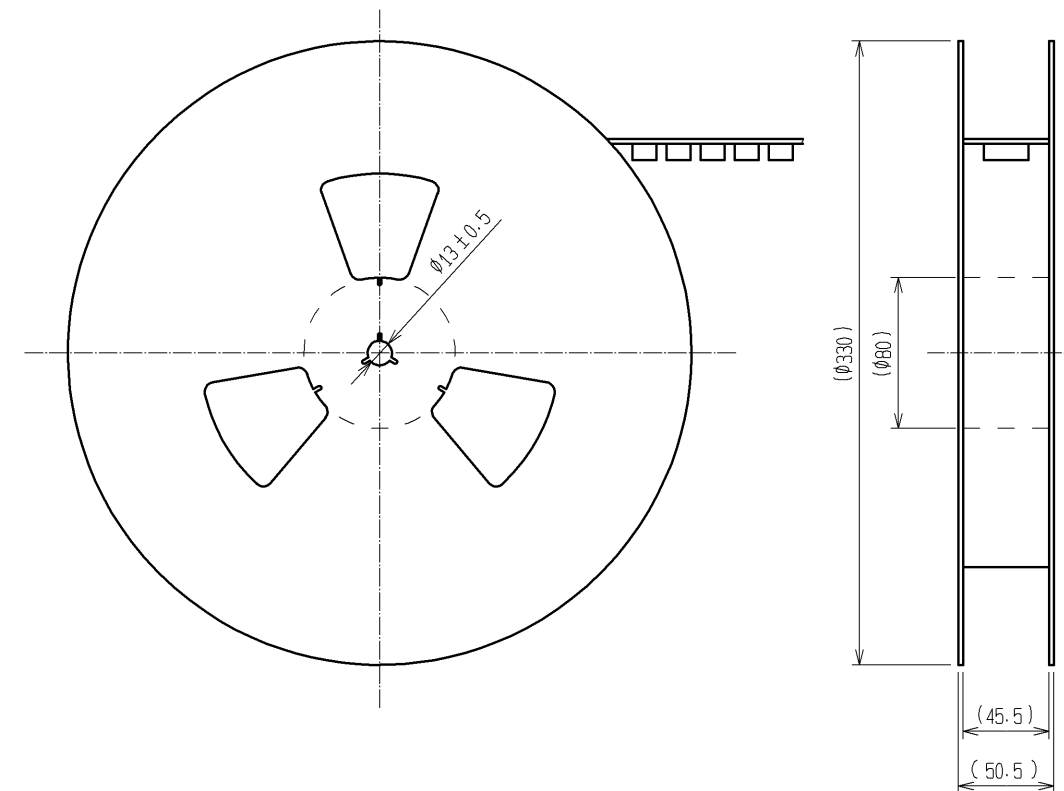

- NOTES
- 1 REEL : 1000 CONNECTORS.
 - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - 3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS

DRAWING NO.	EDC3-152113-21
PART NO.	FX11LB-80S/8-SV(91)
CODE NO.	CL573-0113-8-91

2/2