


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

A
B
C
D
E
F

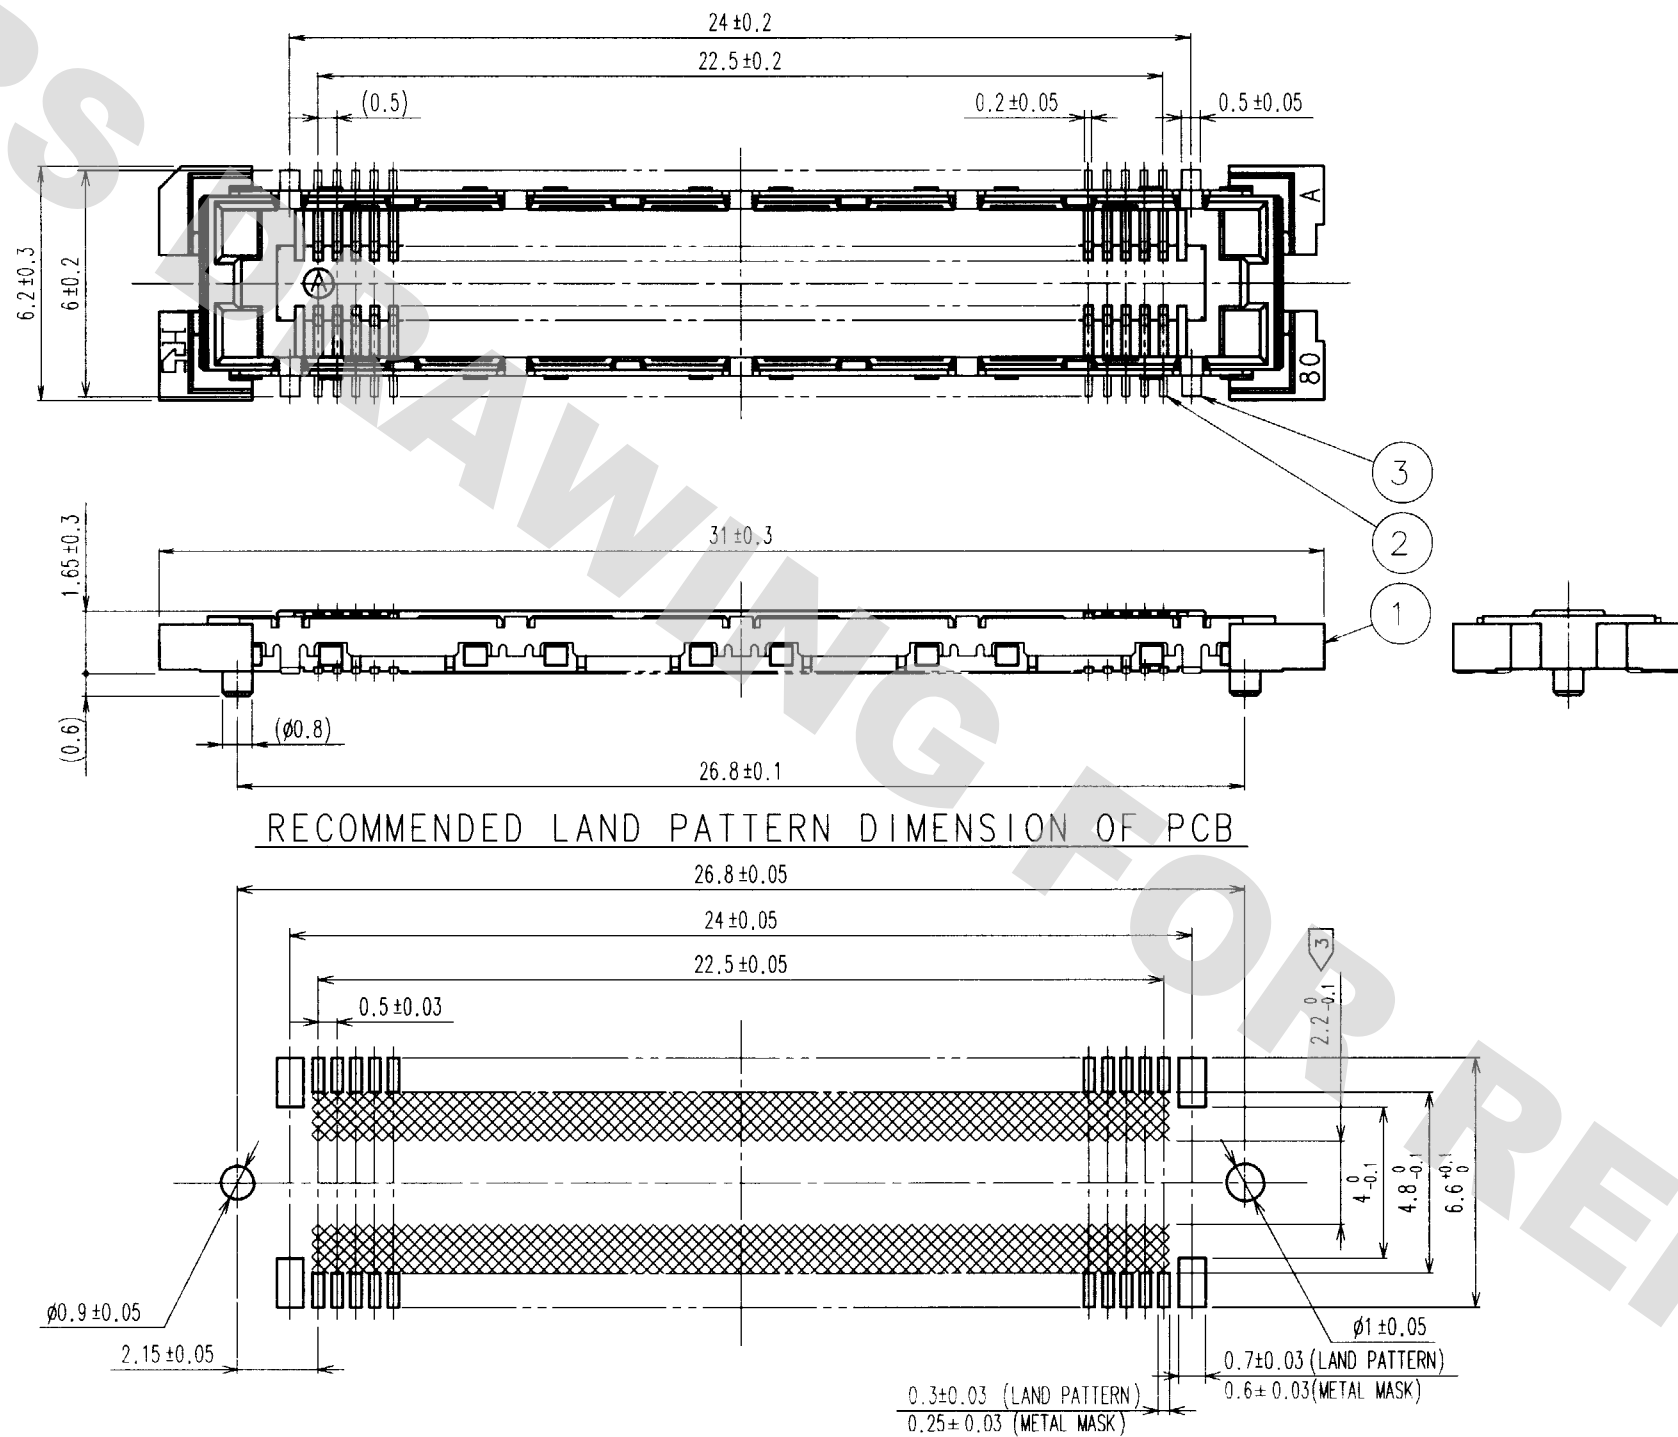

RECOMMENDED LAND PATTERN DIMENSION OF PCB

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1μm) OVER NICKEL							
		LEAD: GOLD FLASH OVER NICKEL							
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS				
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED		
			Mitsukawa	Mitsukawa	M. Shira	J. Yoshimura			
			99.10.27	99.10.27	99.10.28	99.10.28			
SCALE 5 : 1			DRAWING NO. EDC3-152117-02			PART NO. FX11LA-92S-SV (22)			
UNITS mm			HRS HIROSE ELECTRIC CO., LTD.			CODE NO. CL573-0143-9-22			1/2

TO
PCK



A
—
B
—
C
—
D
—
E
—
F
—



三

—