


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK


A
B
C
D
E
F

1 2 3 4 5 6 7 8

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				. .	△				. .
△				. .	△				. .
△				. .	△				. .

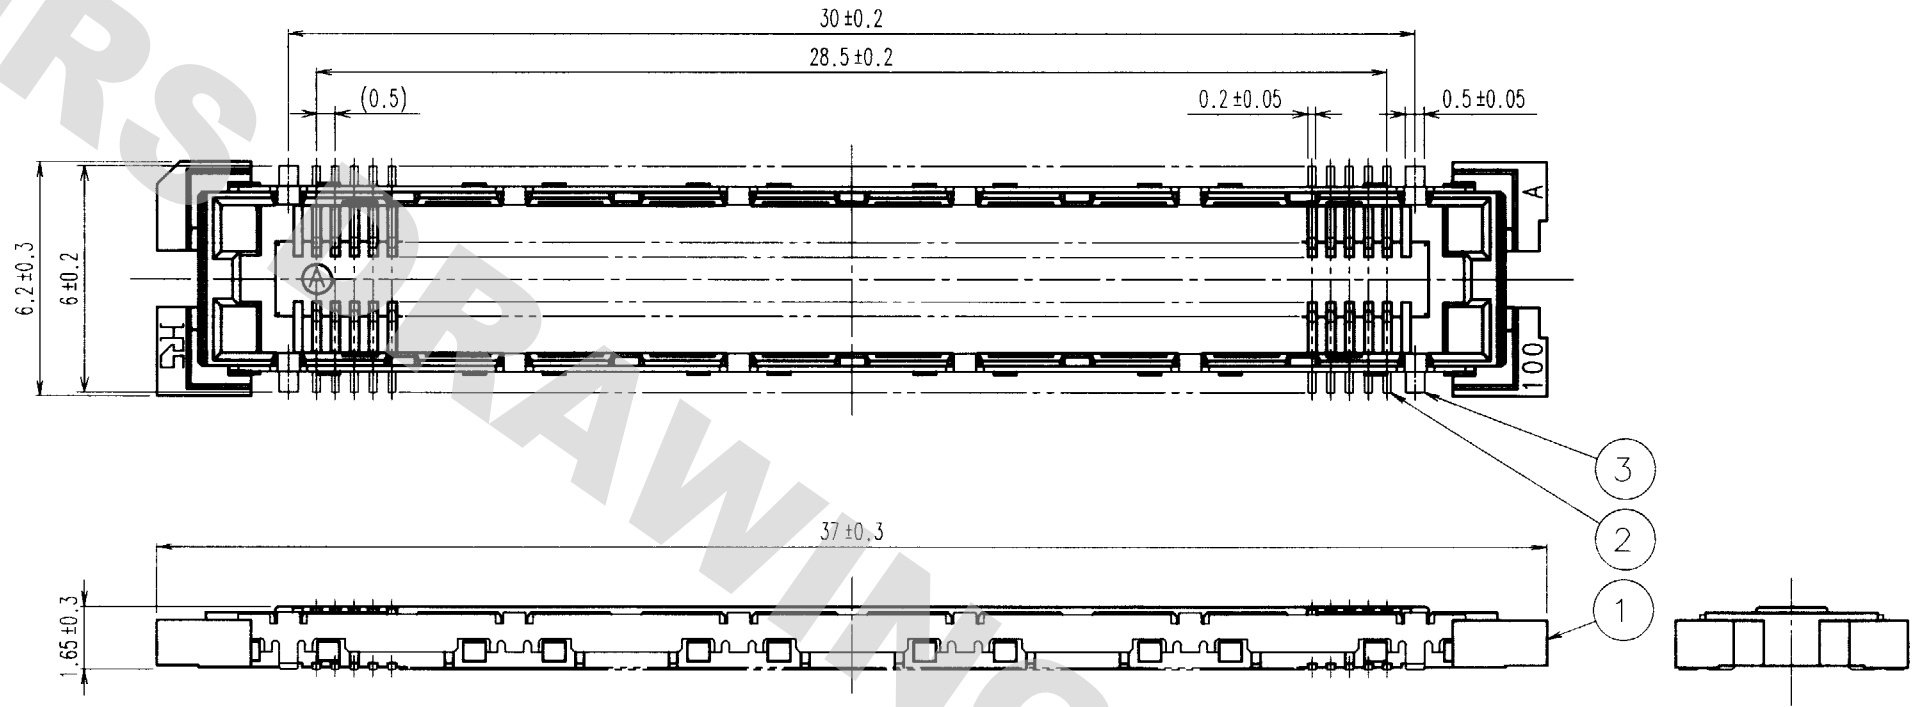

RECOMMENDED LAND PATTERN DIMENSION OF PCB

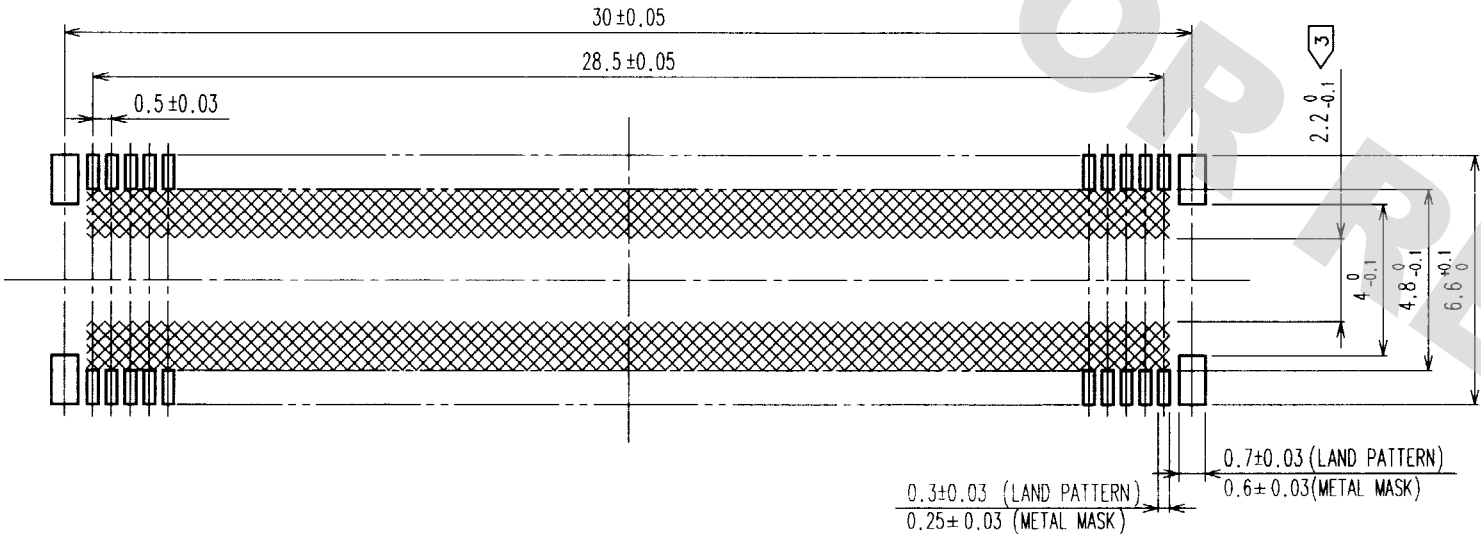

- NOTES
- 1 SMT LEAD-COPLANARITY:0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD (0.1μm) OVER NICKEL					
		LEAD:GOLD FLASH OVER NICKEL					
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			<i>H. Hatakeyama</i> 99.10.27	<i>H. Hatakeyama</i> 99.10.27	<i>M. Ishida</i> 99.10.28	<i>T. Yoshimura</i> 99.10.28	
DRAWING NO. EDC3-152122-02			PART NO. FX11LB-116S-SV (22)				
SCALE 5 : 1			CODE NO. CL573-0154-5-22				1/2
UNITS mm			HRS HIROSE ELECTRIC CO.,LTD.				

1 2 3 4 5 6 7 8

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

