



TO

3, 4 PHOSPHOR BRONZE		TIN-PLATING		2 COPPER ALLOY		LEAD AREA : GOLD FLASH		
1 LCP		BEIGE UL94V-0				UNDER PLATING : NICKEL 1μm min.		
NO. MATERIAL		FINISH, REMARKS		NO. MATERIAL		FINISH, REMARKS		
CODE NO. (OLD) CL				DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
				A.SUZUKAWA '06.10.11	H.Nakamura '06.10.11	H.Ogawa '06.10.11	H.Okawa '06.10.11	
		DRAWING NO. EDC3-152597-25			PART NO. FX11A-60P/6-SV(71)			
SCALE 5 : 1		 HIROSE ELECTRIC CO.,LTD.			CODE NO. CL573-0502-0-71			1/1
UNITS mm								

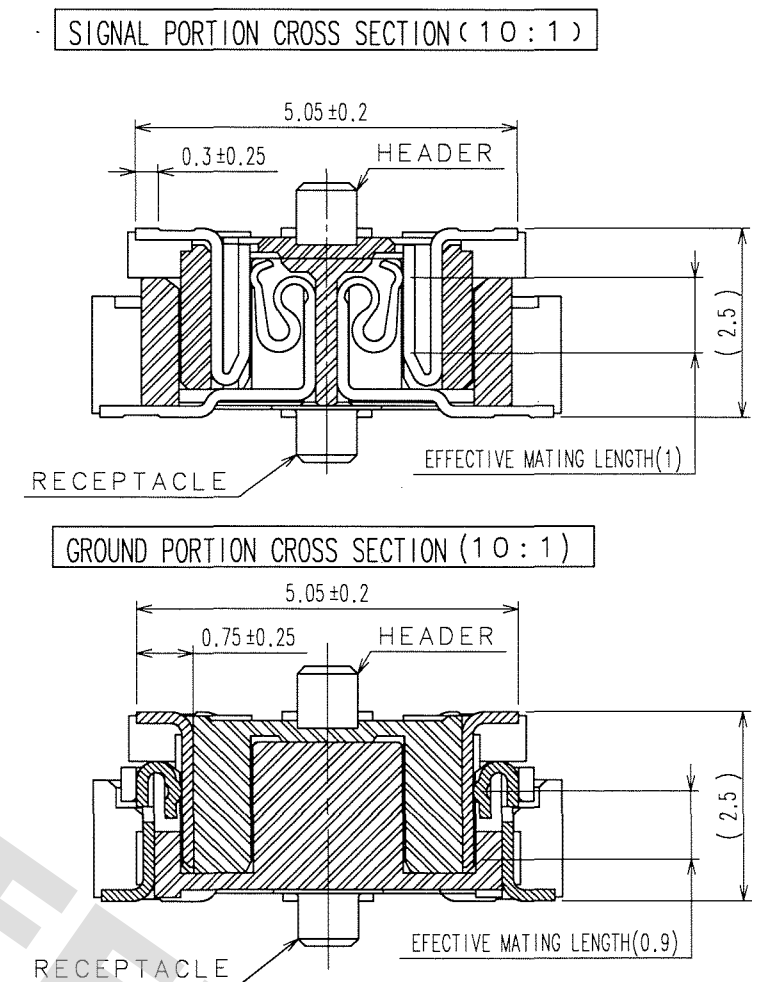

- NOTES
- ① 6 HATCHED  PARTS:GROUND CIRCUIT.
 - 2 SMT LEAD-COPLANARITY:0.1 MAX.
 - 3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ④ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED  AREA.)
 - ⑤ DO NOT MOUNT OTHER DEVICES ONTO   AREA ,OR MATING PAIR CANNOT BE MATED.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.