



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

A
B
C
D
E
F

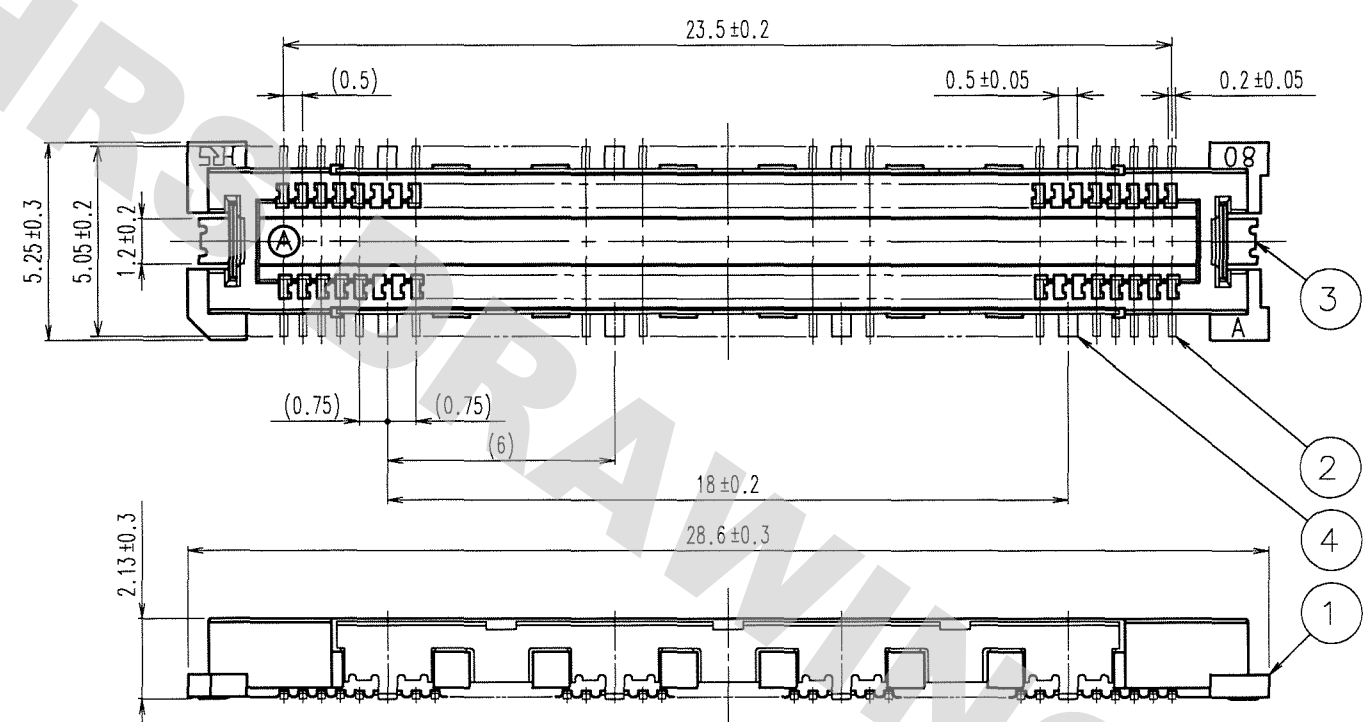


RECOMMENDED LAND PATTERN DIMENSION OF PCB

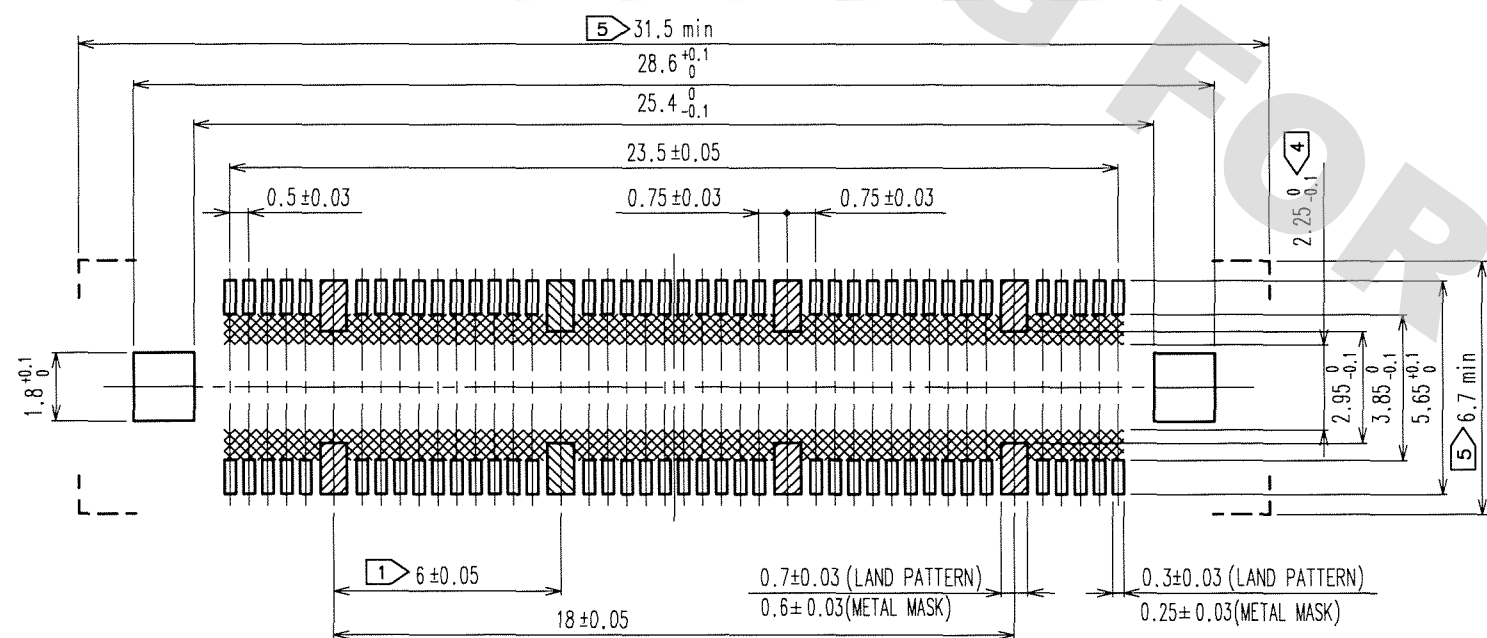


- NOTES
- 1 8 HATCHED PARTS: GROUND CIRCUIT.
 - 2 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 4 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 5 DO NOT MOUNT OTHER DEVICES ONTO AREA, OR MATING PAIR CANNOT BE MATED.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				.	△				.
△				.	△				.
△				.	△				.

SIGNAL PORTION CROSS SECTION (10:1)

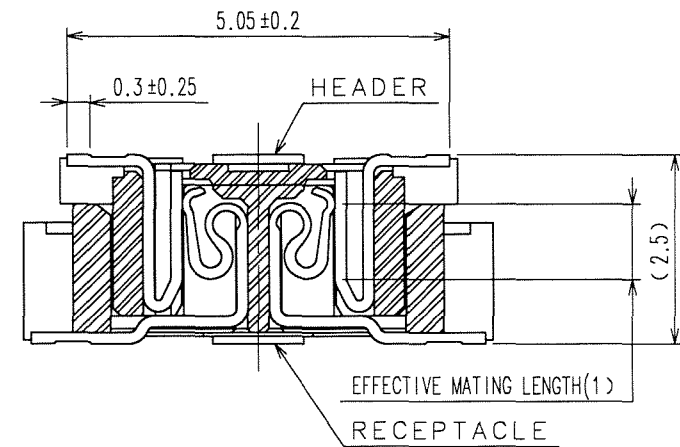

GROUND PORTION CROSS SECTION (10:1)

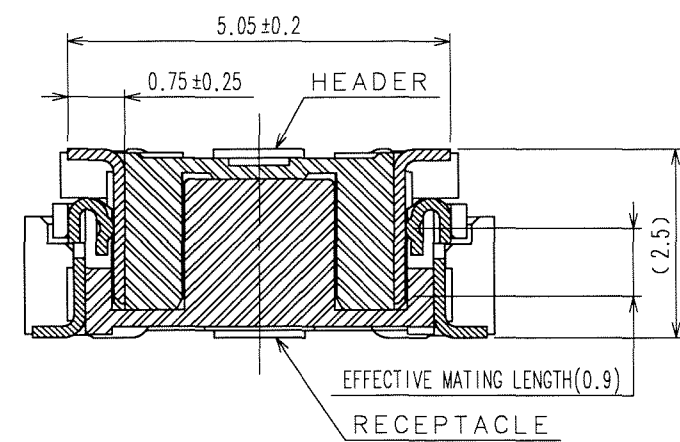

3, 4 PHOSPHOR BRONZE			TIN-PLATING		2	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μ m min.						
1 LCP			BEIGE UL94V-0				LEAD AREA:GOLD FLASH						
NO. MATERIAL			FINISH, REMARKS			NO. MATERIAL		FINISH, REMARKS					
CODE NO. (OLD) CL				DRAWN		DESIGNED		CHECKED		APPROVED		RELEASED	
				S.KAMIGA		H. Nakamura		J. C. Ogawa		H. Okawa			
				06.05.13		06.05.13		06.05.13		06.05.13			
		DRAWING NO.				PART NO.							
SCALE 5 : 1		EDC3-152602-25				FX11B-80P/8-SV(71)							
UNITS mm		HRS HIROSE ELECTRIC CO.,LTD.				CODE NO. CL573-0513-6-71						1/1	