



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

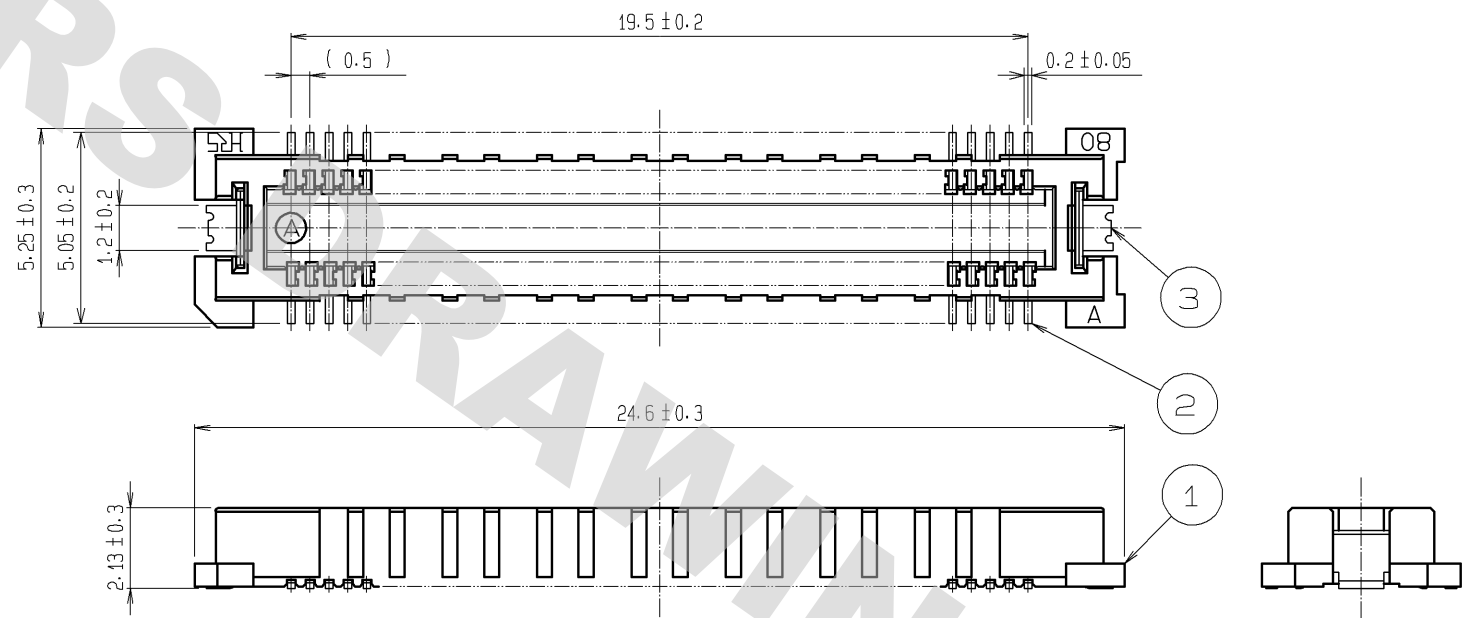


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

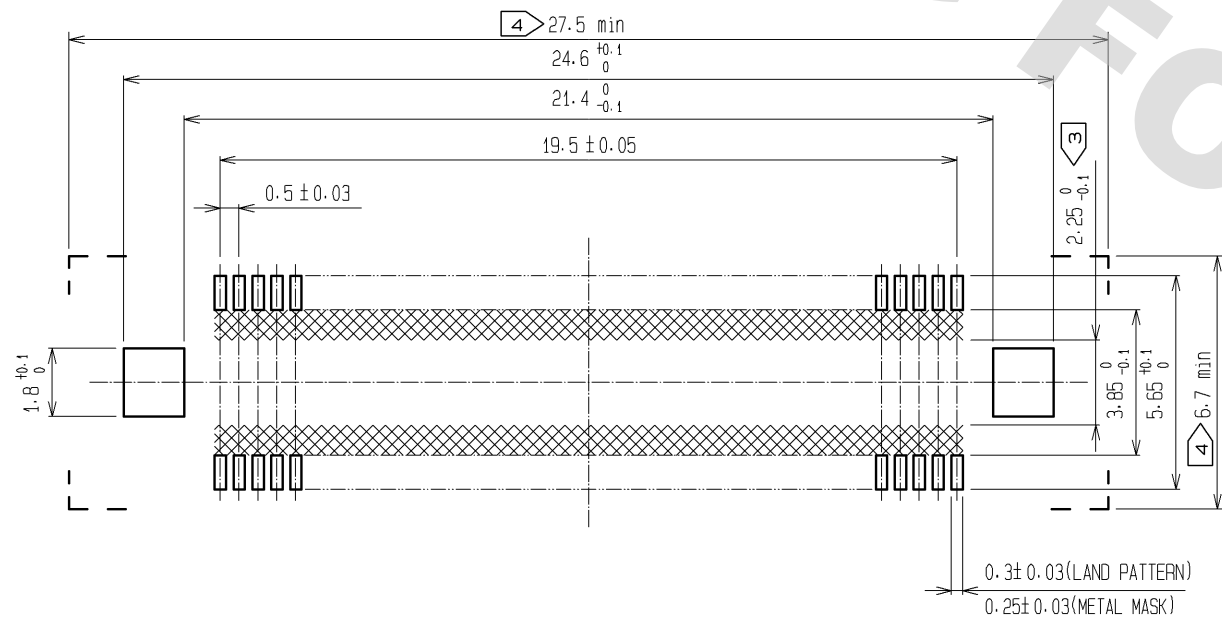

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND. OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 DO NOT MOUNT OTHER DEVICES ONTO [] AREA. OR MATING PAIR CANNOT BE MATED.
 - 5 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

SIGNAL PORTION CROSS SECTION (10:1)

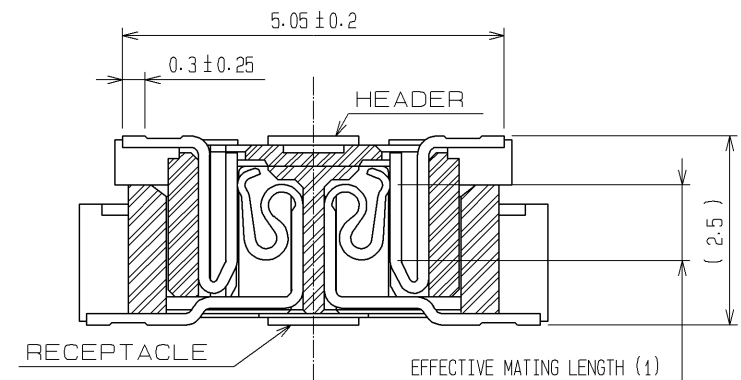


3	PHOSPHOR BRONZE	TIN PLATING			
2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm min.	6	POLYIMIDE	(TAPE FOR VACUUM PICKUP)
		LEAD AREA : GOLD FLASH	5	PET	TOP COVER TAPE
1	LCP	UNDER PLATING : NICKEL 1μm min.	4	PS	EMBOSSED CARRIER TAPE
BEIGE	UL94V-0				
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm	⊙	SCALE 5 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HRS	HIROSE ELECTRIC CO., LTD.	APPROVED : HS. OKAWA	08.06.03	DRAWING NO.	EDC3-152613-02
		CHECKED : HS. OZAWA	08.06.03	PART NO.	FX11B-80P-SV(22)
		DESIGNED : SY. KAMIGA	08.06.03	CODE NO.	CL573-0558-4-22
		DRAWN : HK. SUNADORI	08.06.02		△ 1/2

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

DRAWING FOR PACKING(2:1)

REELED DIMENSION(Free)

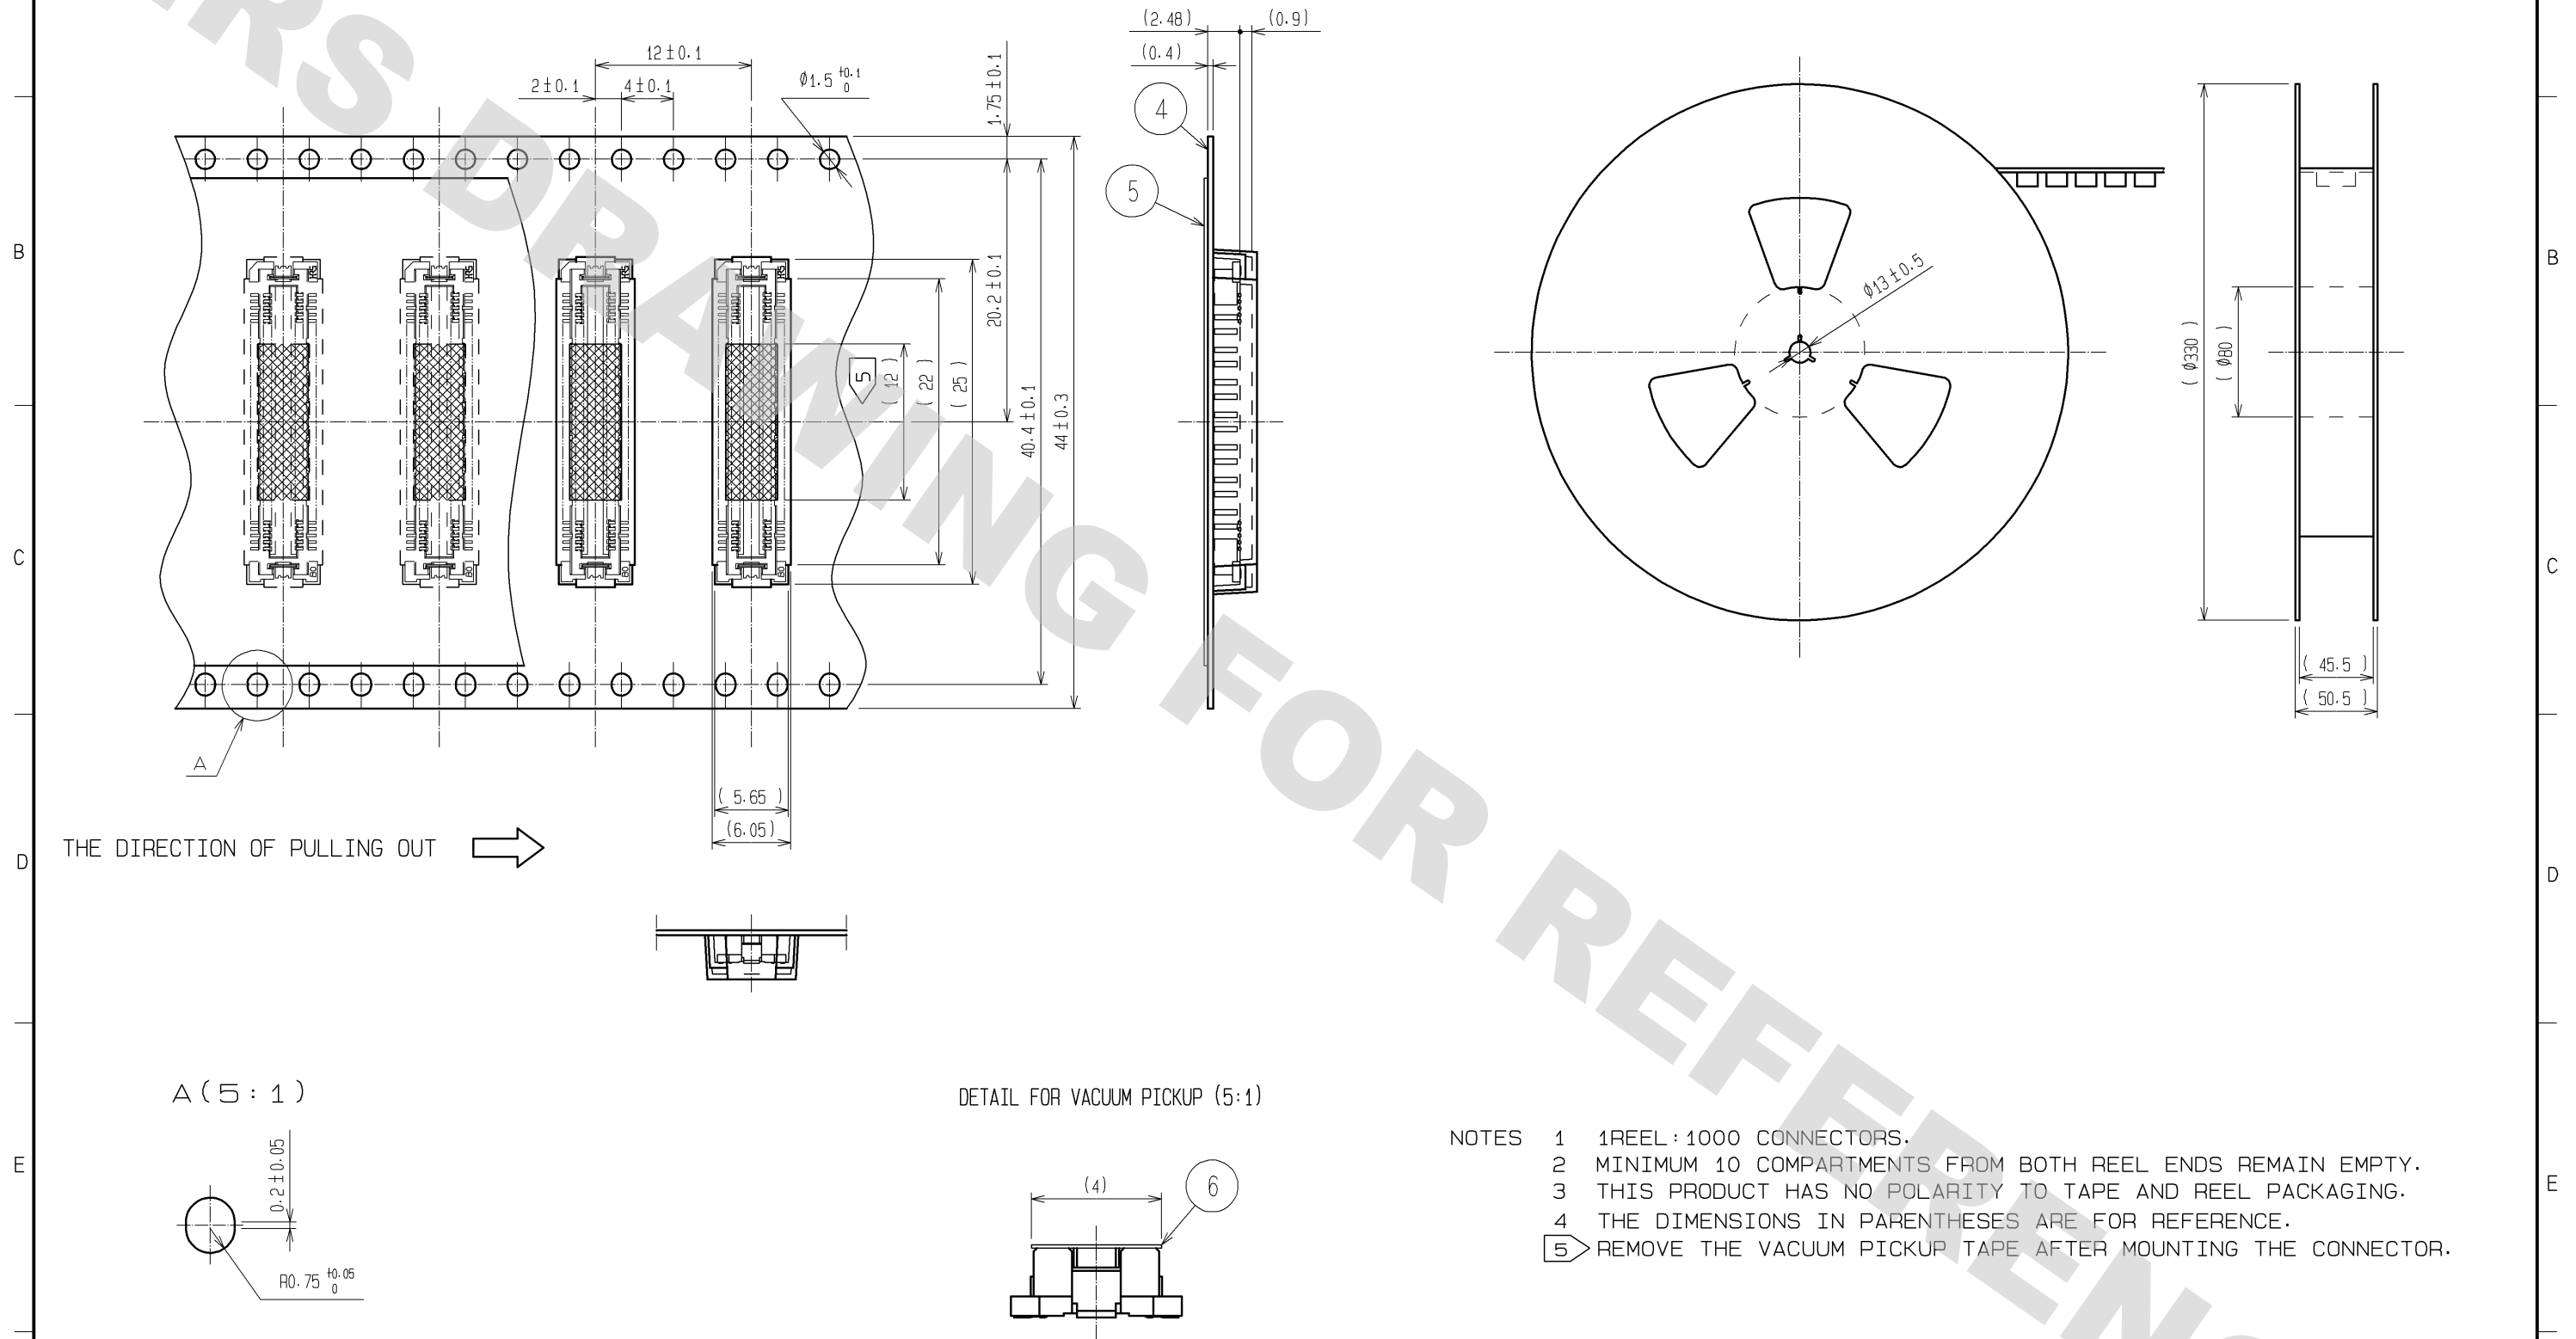

- NOTES
- 1 REEL : 1000 CONNECTORS.
 - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - 3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 5 REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

HRS

DRAWING NO.	EDC3-152613-02
PART NO.	FX11B-80P-SV(22)
CODE NO.	CL573-0558-4-22

2/2