



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

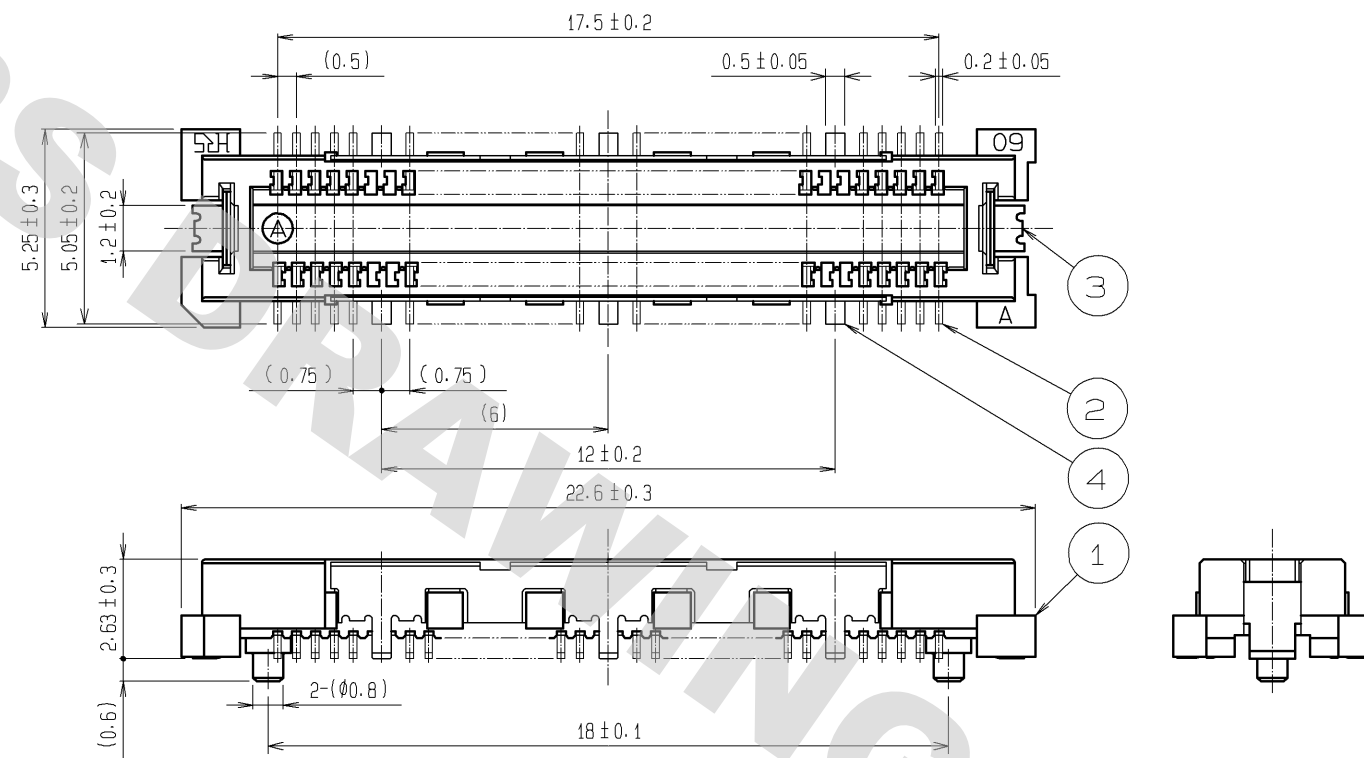


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

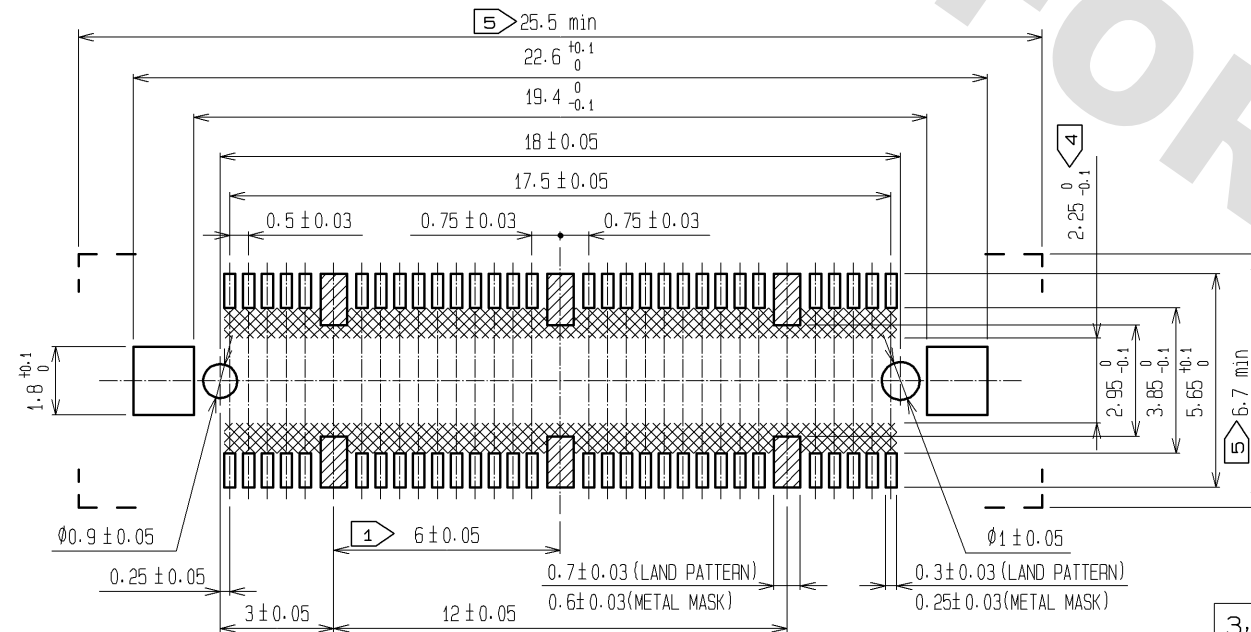


- NOTES
- 6 HATCHED PARTS: GROUND CIRCUIT.
 - SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - DO NOT MOUNT OTHER DEVICES ONTO AREA, OR MATING PAIR CANNOT BE MATED.
 - TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

SIGNAL PORTION CROSS SECTION (10:1)

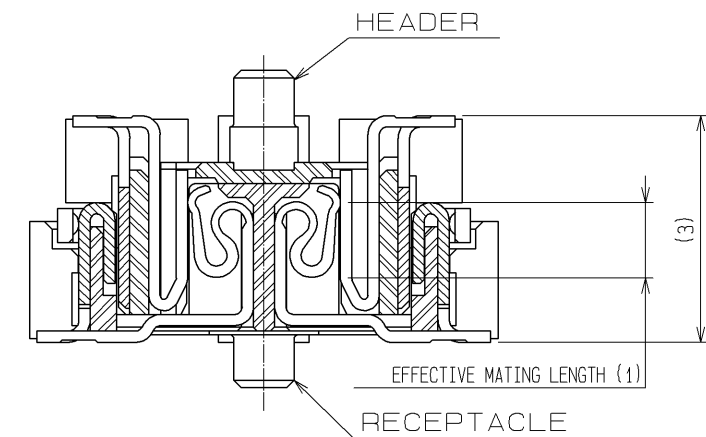


GROUND PORTION CROSS SECTION (10:1)

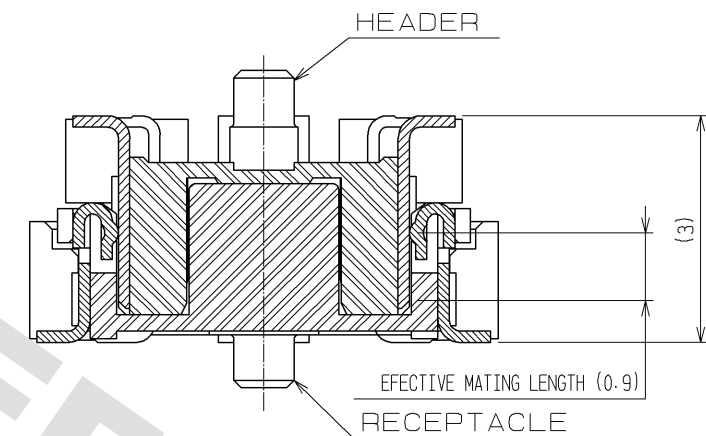






3, 4	PHOSPHOR BRONZE	TIN PLATING			
2	COPPER ALLOY	CONTACT AREA : GOLD 0.1µm min.			
		LEAD AREA : GOLD FLASH			
		UNDER PLATING : NICKEL 1µm min.	6	PET	TOP COVER TAPE
1	LCP	BEIGE UL94V-0	5	PS	EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	08.11.06	DRAWING NO.	EDC3-152614-21
		CHECKED : HT. YAMAGUCHI	08.11.06	PART NO.	FX11A-60P/6-SV0.5(91)
		DESIGNED : SY. KAMIGA	08.11.06	CODE NO.	CL573-0602-4-91
		DRAWN : HK. SUNADORI	08.11.05		△ 1/2

DRAWING FOR PACKING(2:1)

REELED DIMENSION(Free)

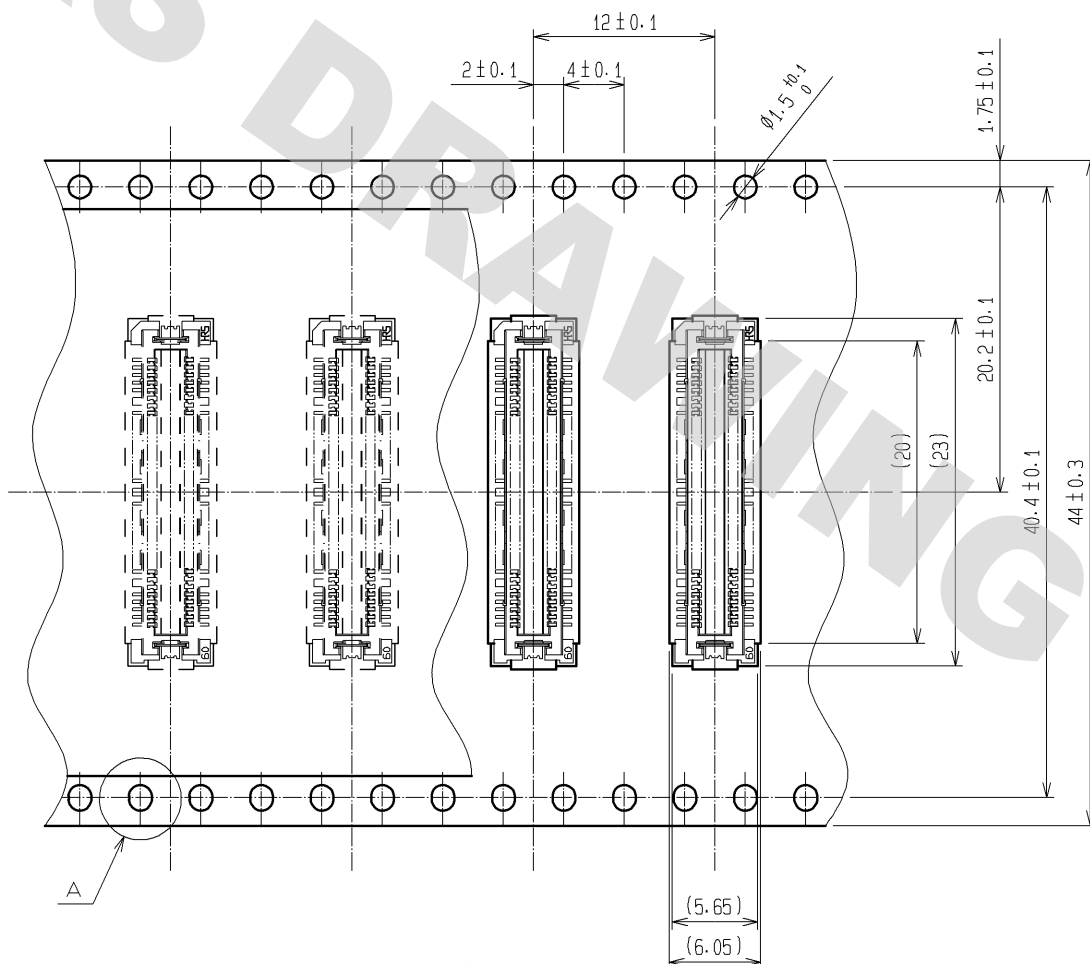

THE DIRECTION OF PULLING OUT 

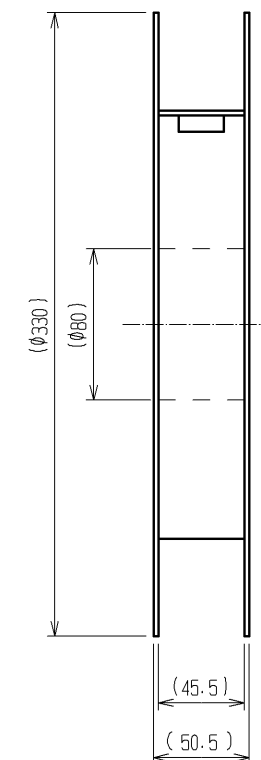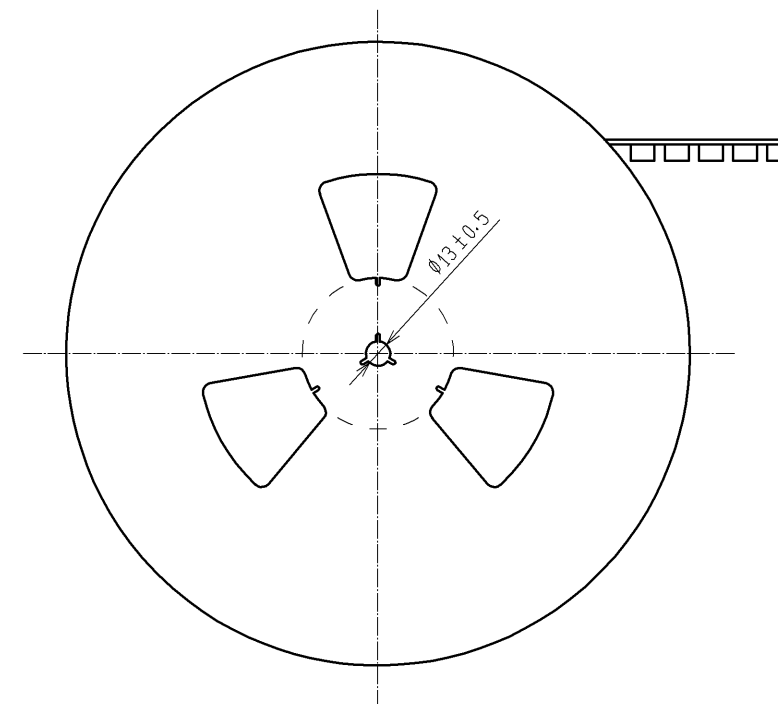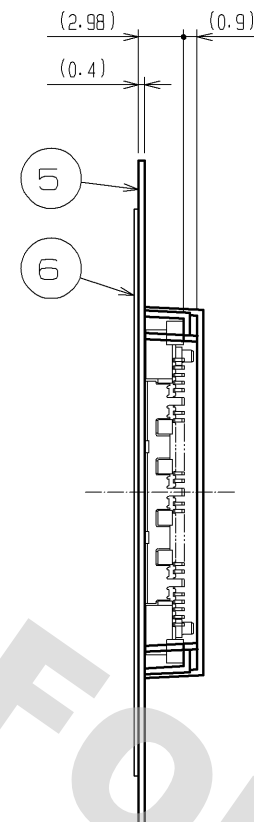

- NOTES 1 1REEL : 1000 CONNECTORS.
2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012