
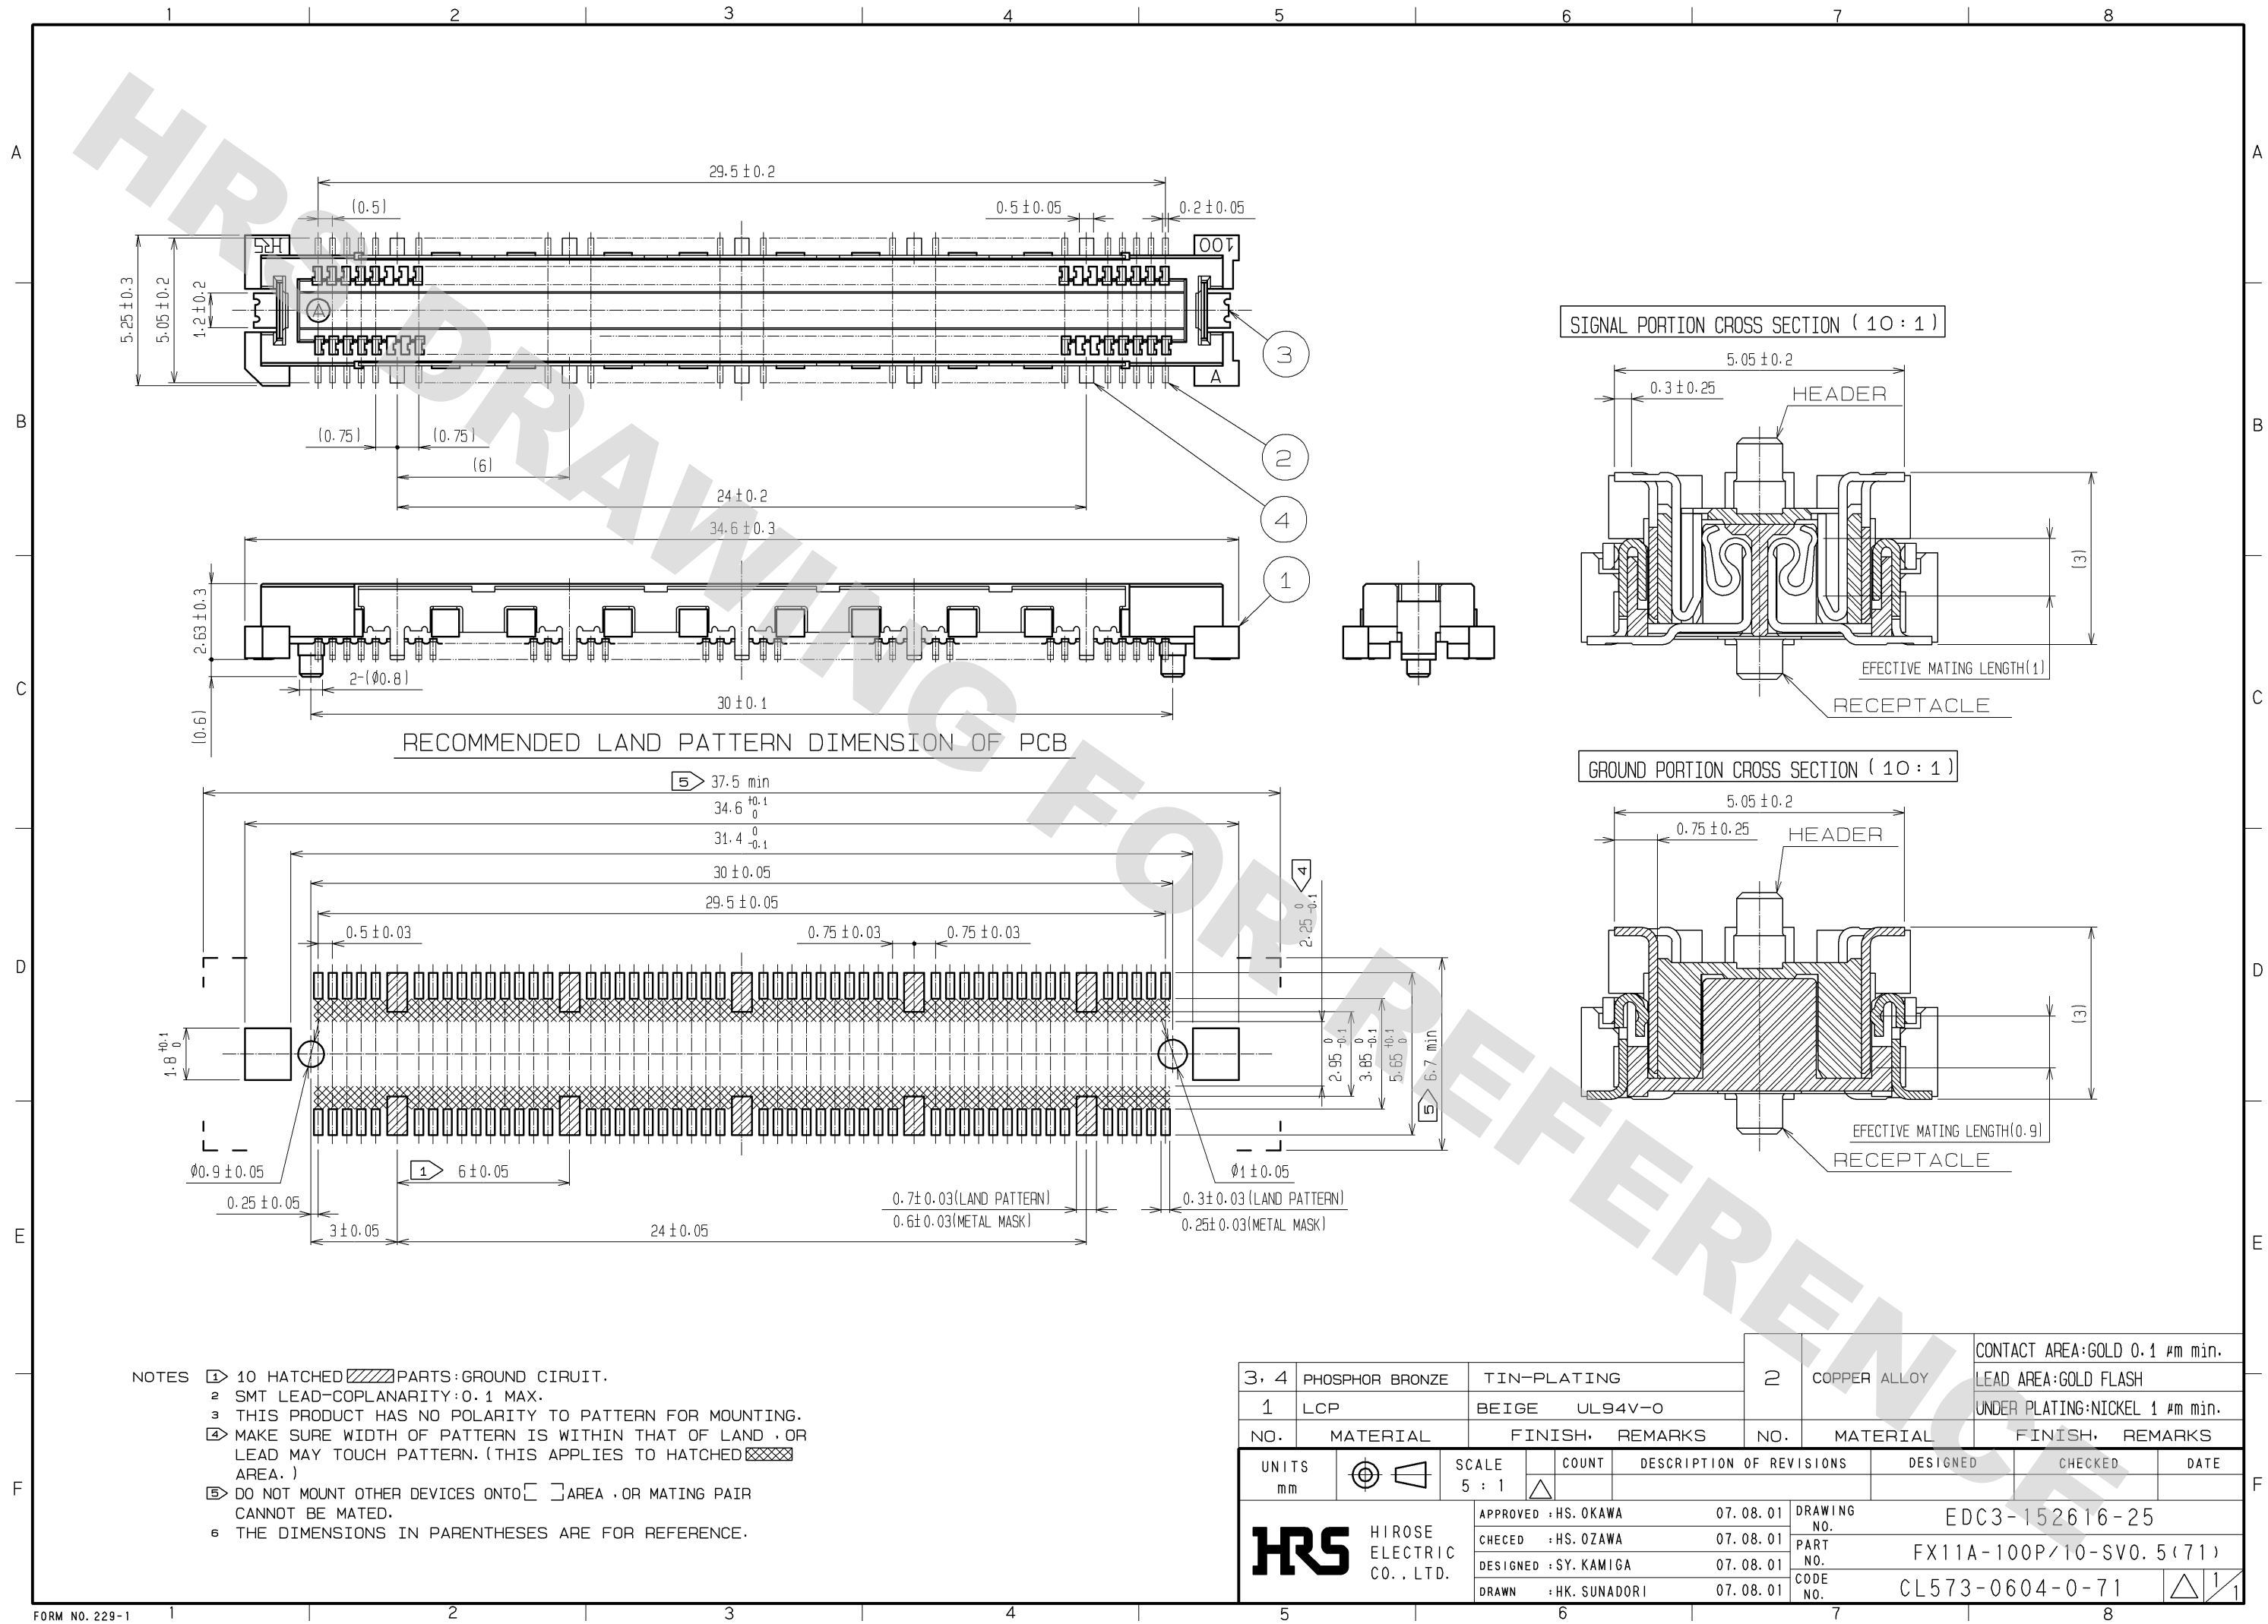


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012



- NOTES
- ① 10 HATCHED PARTS: GROUND CIRCUIT.
 - ② SMT LEAD-COPLANARITY: 0.1 MAX.
 - ③ THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ④ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - ⑤ DO NOT MOUNT OTHER DEVICES ONTO AREA, OR MATING PAIR CANNOT BE MATED.
 - ⑥ THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3, 4			PHOSPHOR BRONZE		TIN-PLATING		2	COPPER ALLOY	CONTACT AREA:GOLD 0.1 #m min.				
1			LCP		BEIGE UL94V-0				LEAD AREA:GOLD FLASH				
NO.			MATERIAL		FINISH, REMARKS				UNDER PLATING:NICKEL 1 #m min.				
UNITS mm					SCALE 5 : 1			COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.					APPROVED : HS. OKAWA		07.08.01		DRAWING NO.		EDC3-152616-25		
					CHECED : HS. OZAWA		07.08.01		PART NO.		FX11A-100P/10-SV0.5(71)		
					DESIGNED : SY. KAMIGA		07.08.01		CODE NO.		CL573-0604-0-71		
					DRAWN : HK. SUNADORI		07.08.01				 1/1		