


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

A
B
C
D
E
F

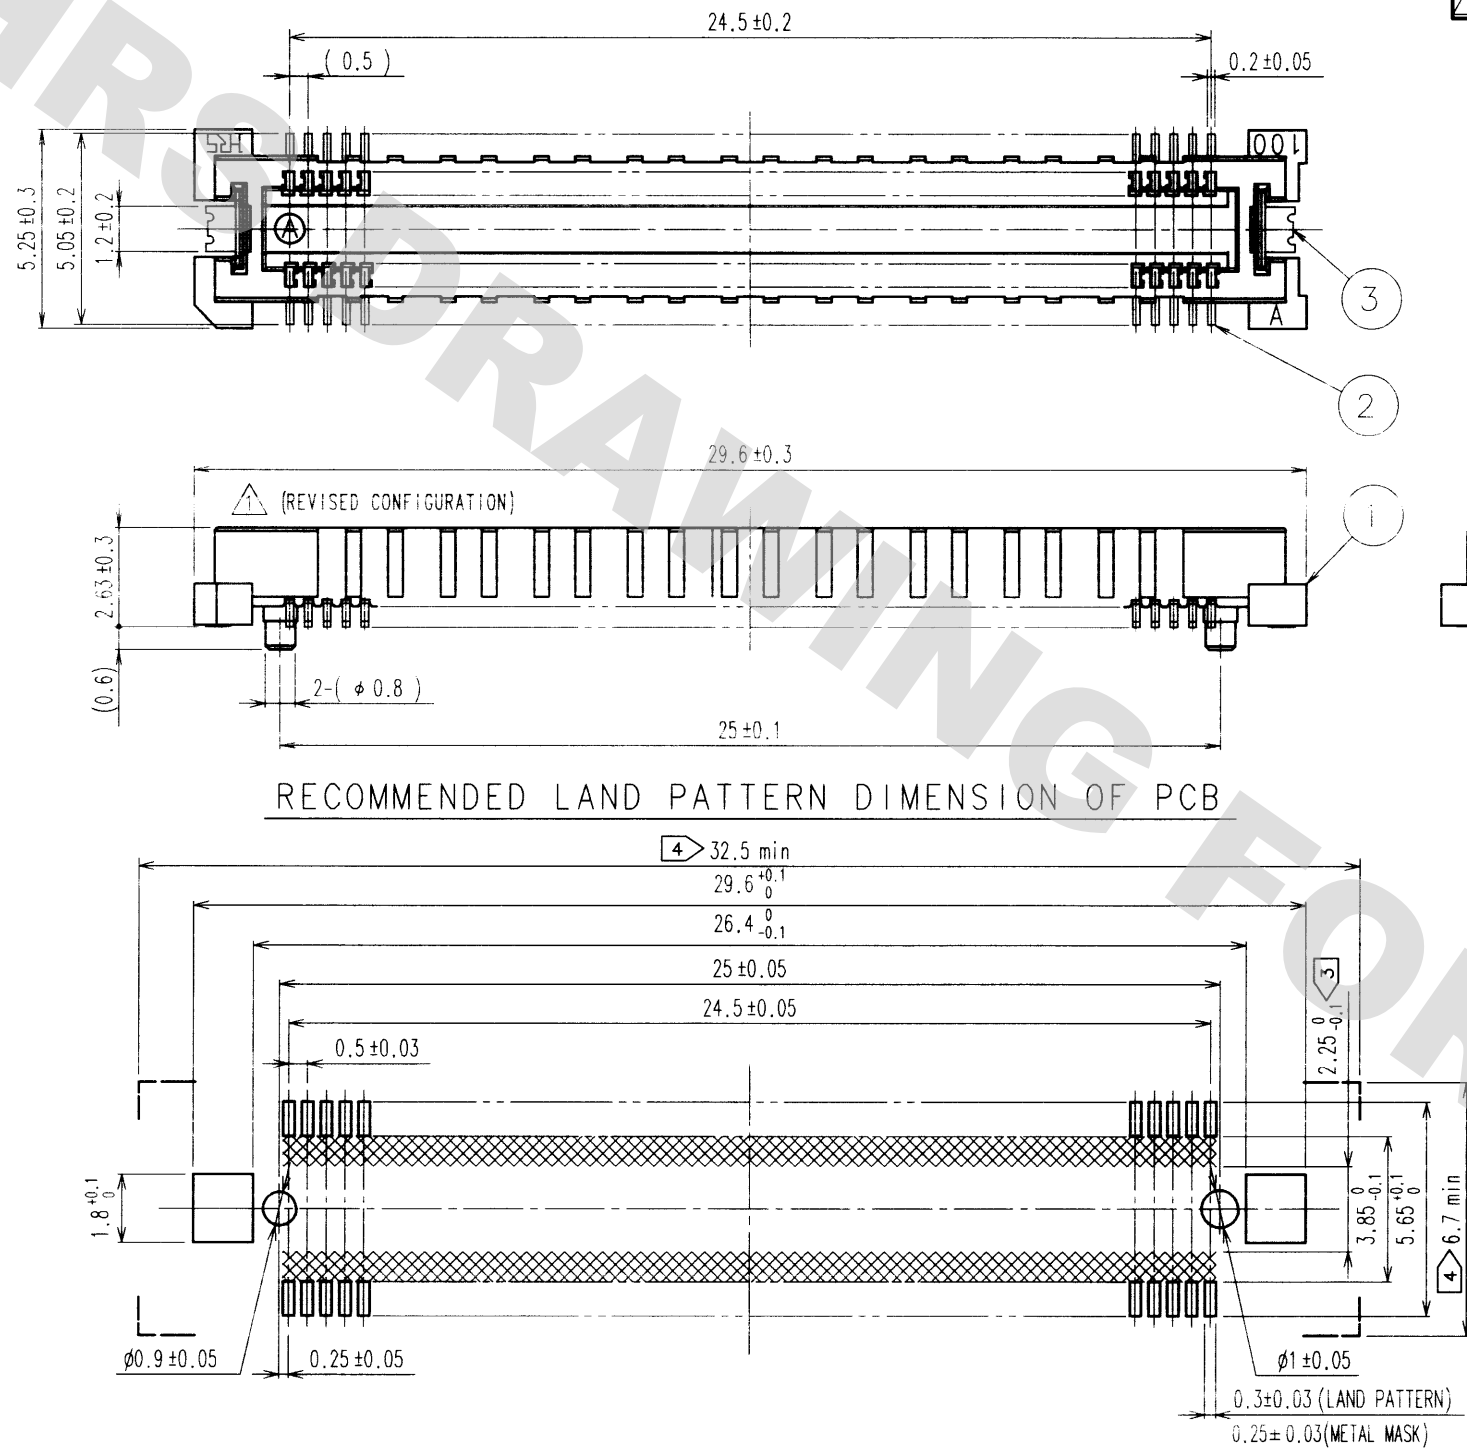


RECOMMENDED LAND PATTERN DIMENSION OF PCB

- NOTES
- 1 SMT LEAD-COPLANARITY:0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 DO NOT MOUNT OTHER DEVICES ONTO □ AREA ,OR MATING PAIR CANNOT BE MATED.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	RE-F-06821	J.M	H.O	00.04.06					

SIGNAL PORTION CROSS SECTION (10:1)

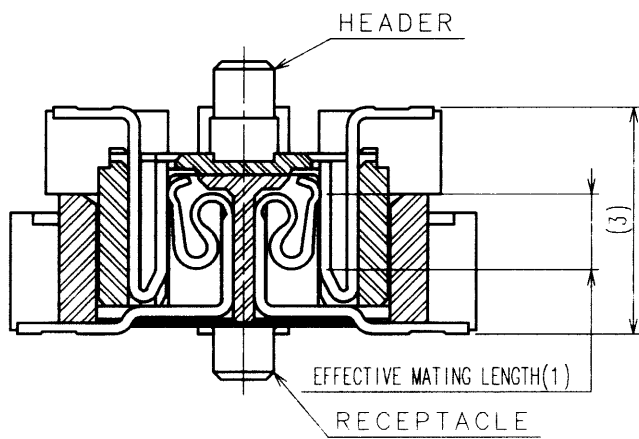

2	COPPER ALLOY	CONTACT AREA:GOLD (0.1μm) OVER NICKEL LEAD:GOLD FLASH OVER NICKEL	3	PHOSPHOR BRONZE	TIN PLATED
1	LCP	BEIGE UL94V-0			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL		DRAWN J.MATSUKAWA	DESIGNED J.MATSUKAWA	CHECKED M.ISHIDA	APPROVED Y.YOSHIMURA
		00.01.15	00.01.15	00.01.17	00.01.17
SCALE 5 : 1		DRAWING NO. EDC3-152623		PART NO. FX11A-100P-SV0.5	
UNITS mm		HRS HIROSE ELECTRIC CO.,LTD.		CODE NO. CL573-0643-1	