



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK


5				6				7				8			
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT
△				.	△				.	△				.	△
△				.	△				.	△				.	△
△				.	△				.	△				.	△

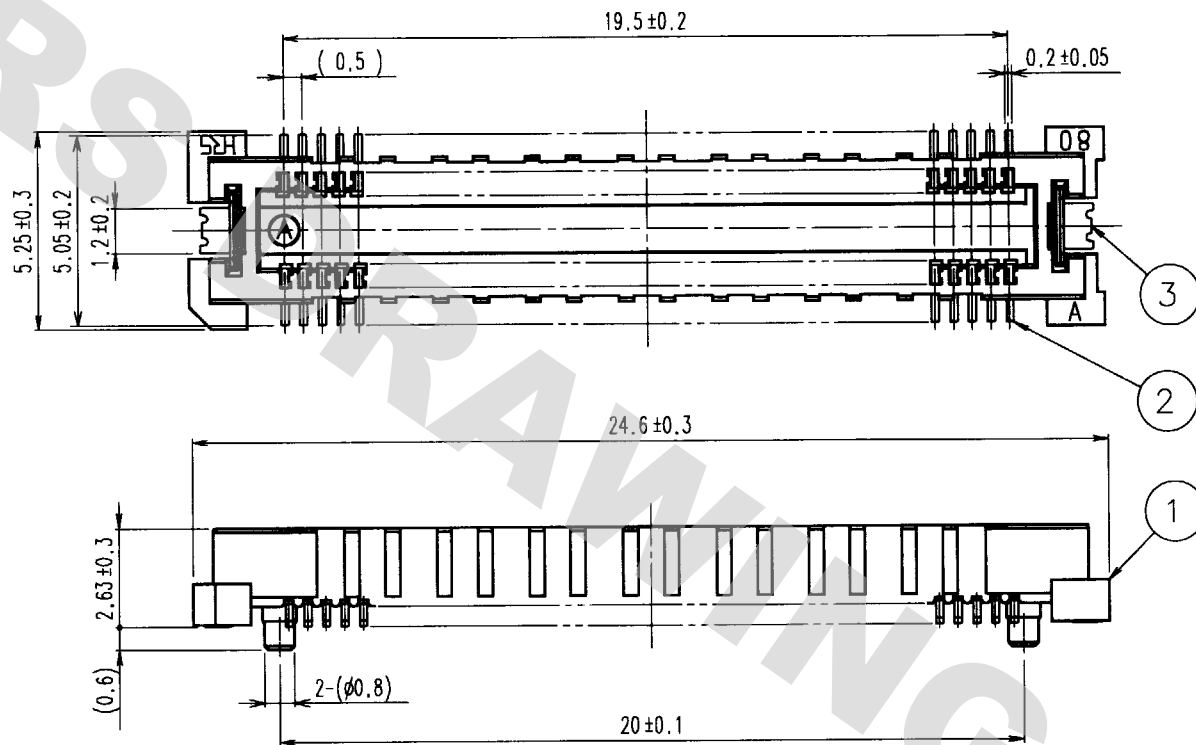

RECOMMENDED LAND PATTERN DIMENSION OF PCB

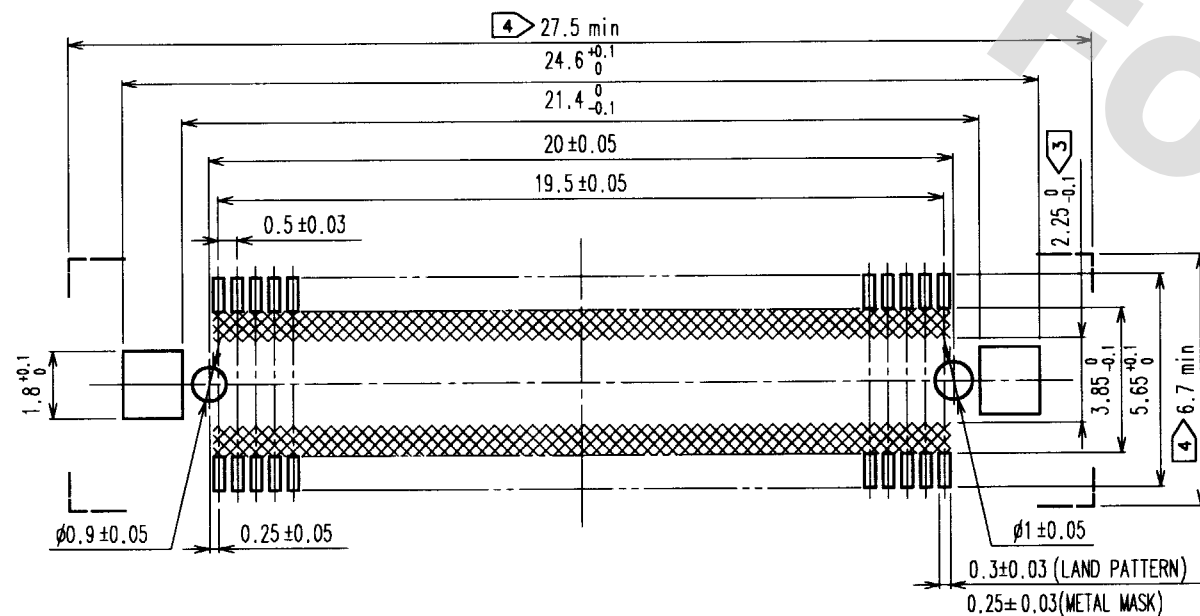

SIGNAL PORTION CROSS SECTION (10:1)

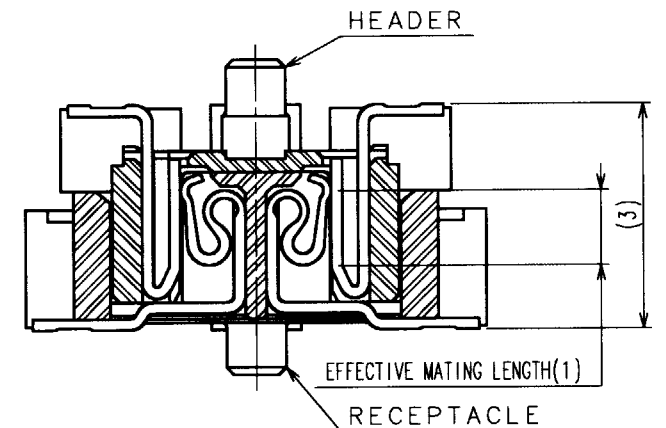

- NOTES
- 1 SMT LEAD CO-PLANARITY:0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 DO NOT MOUNT OTHER DEVICES ONTO □ AREA ,OR MATING PAIR CANNOT BE MATED.

2	COPPER ALLOY	CONTACT AREA:GOLD(0.1μm) OVER NICKEL			
		LEAD:GOLD FLASH OVER NICKEL			
1	LCP	BEIGE	UL94V-0	3	PHOSPHOR BRONZE TIN PLATED
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
CL		H. Kiriya	T. Takano	H. Okawa	T. Yoshimura
		01.01.30	01.01.30	01.01.30	01.01.31
		RELEASED			
		DRAWING NO.		PART NO.	
		EDC3-152626		FX11A-80P-SV0.5	
		CODE NO.			
		CL573-0648-5			
		1		1	