



DRAWING FOR REFERENCE: This is subject to change without notice  
08/11/2012

TO  
PCK


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

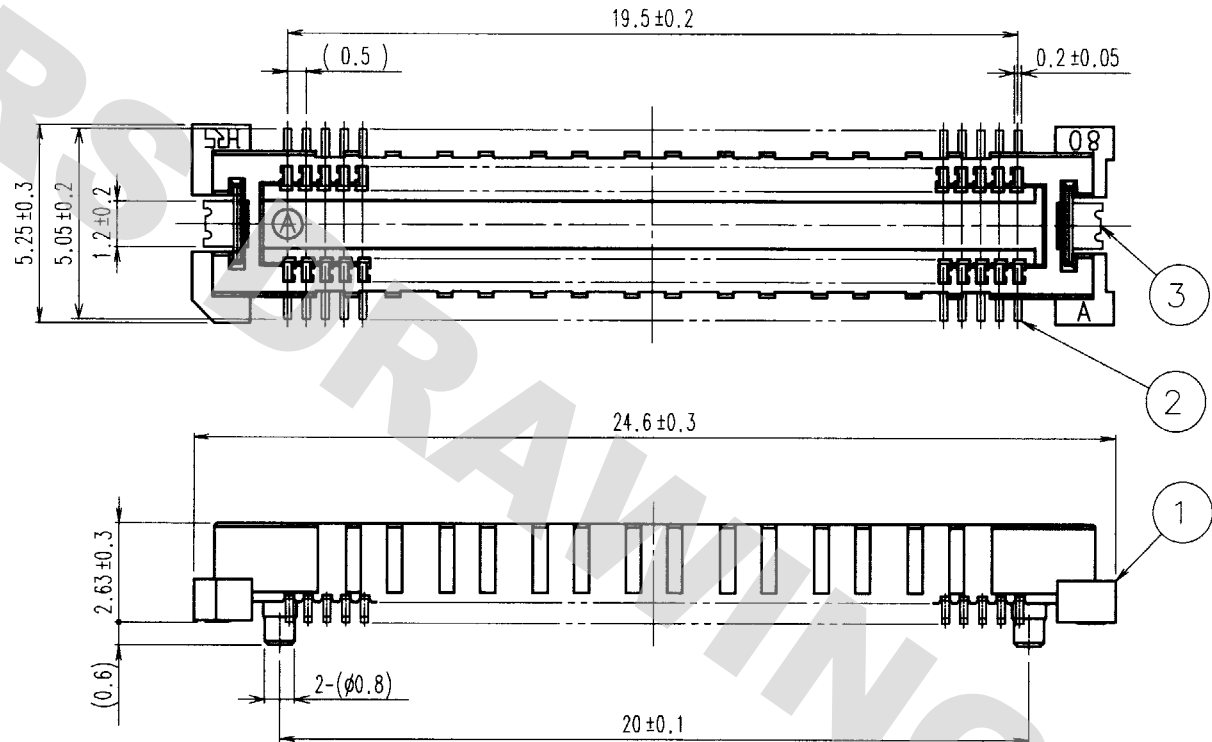

RECOMMENDED LAND PATTERN DIMENSION OF PCB

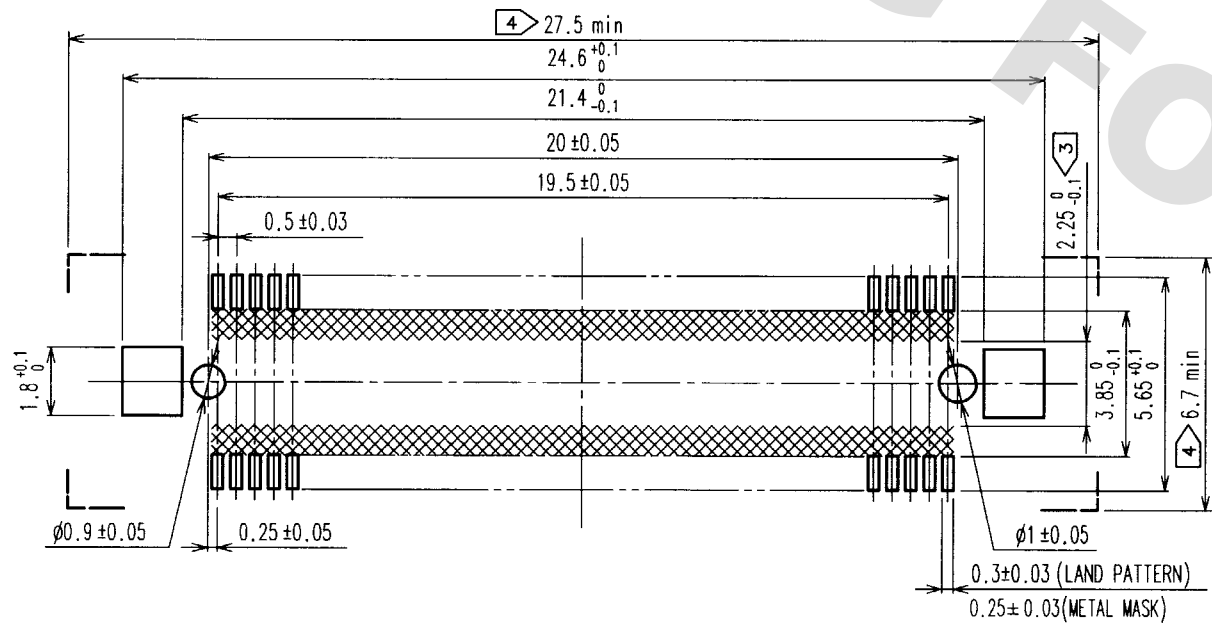

SIGNAL PORTION CROSS SECTION (10:1)

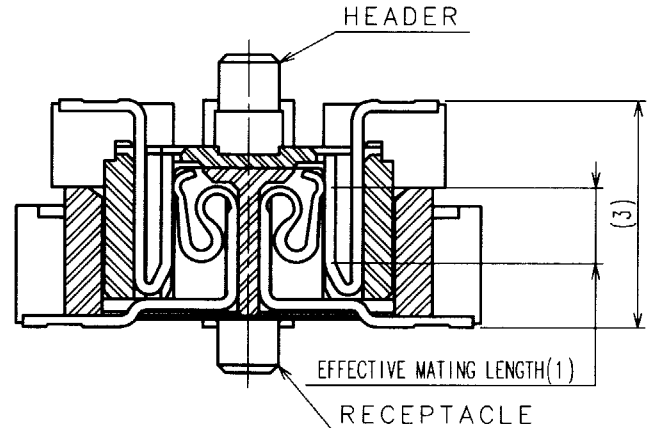

- NOTES
- 1 SMT LEAD-COPLANARITY:0.1 MAX.
  - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
  - 4 DO NOT MOUNT OTHER DEVICES ONTO □ AREA ,OR MATING PAIR CANNOT BE MATED.
  - 5 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

2	COPPER ALLOY	CONTACT AREA:GOLD (0.1μm) OVER NICKEL							
		LEAD:GOLD FLASH OVER NICKEL							
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS				
CODE NO. (OLD)	CL		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED		
			Matsukawa	Matsukawa	H. Oawa	J. Yoshimura			
			00-06-20	00-06-20	00-06-21	00-06-23			
SCALE	5 : 1	DRAWING NO.	EDC3-152626-01	PART NO.	FX11A-80P-SV0.5(21)				
UNITS	mm	CODE NO.	CL573-0648-5-21						

DRAWING FOR REFERENCE: This is subject to change without notice  
08/11/2012

TO
PCK

