


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012


TO
PCK

A
B
C
D
E
F

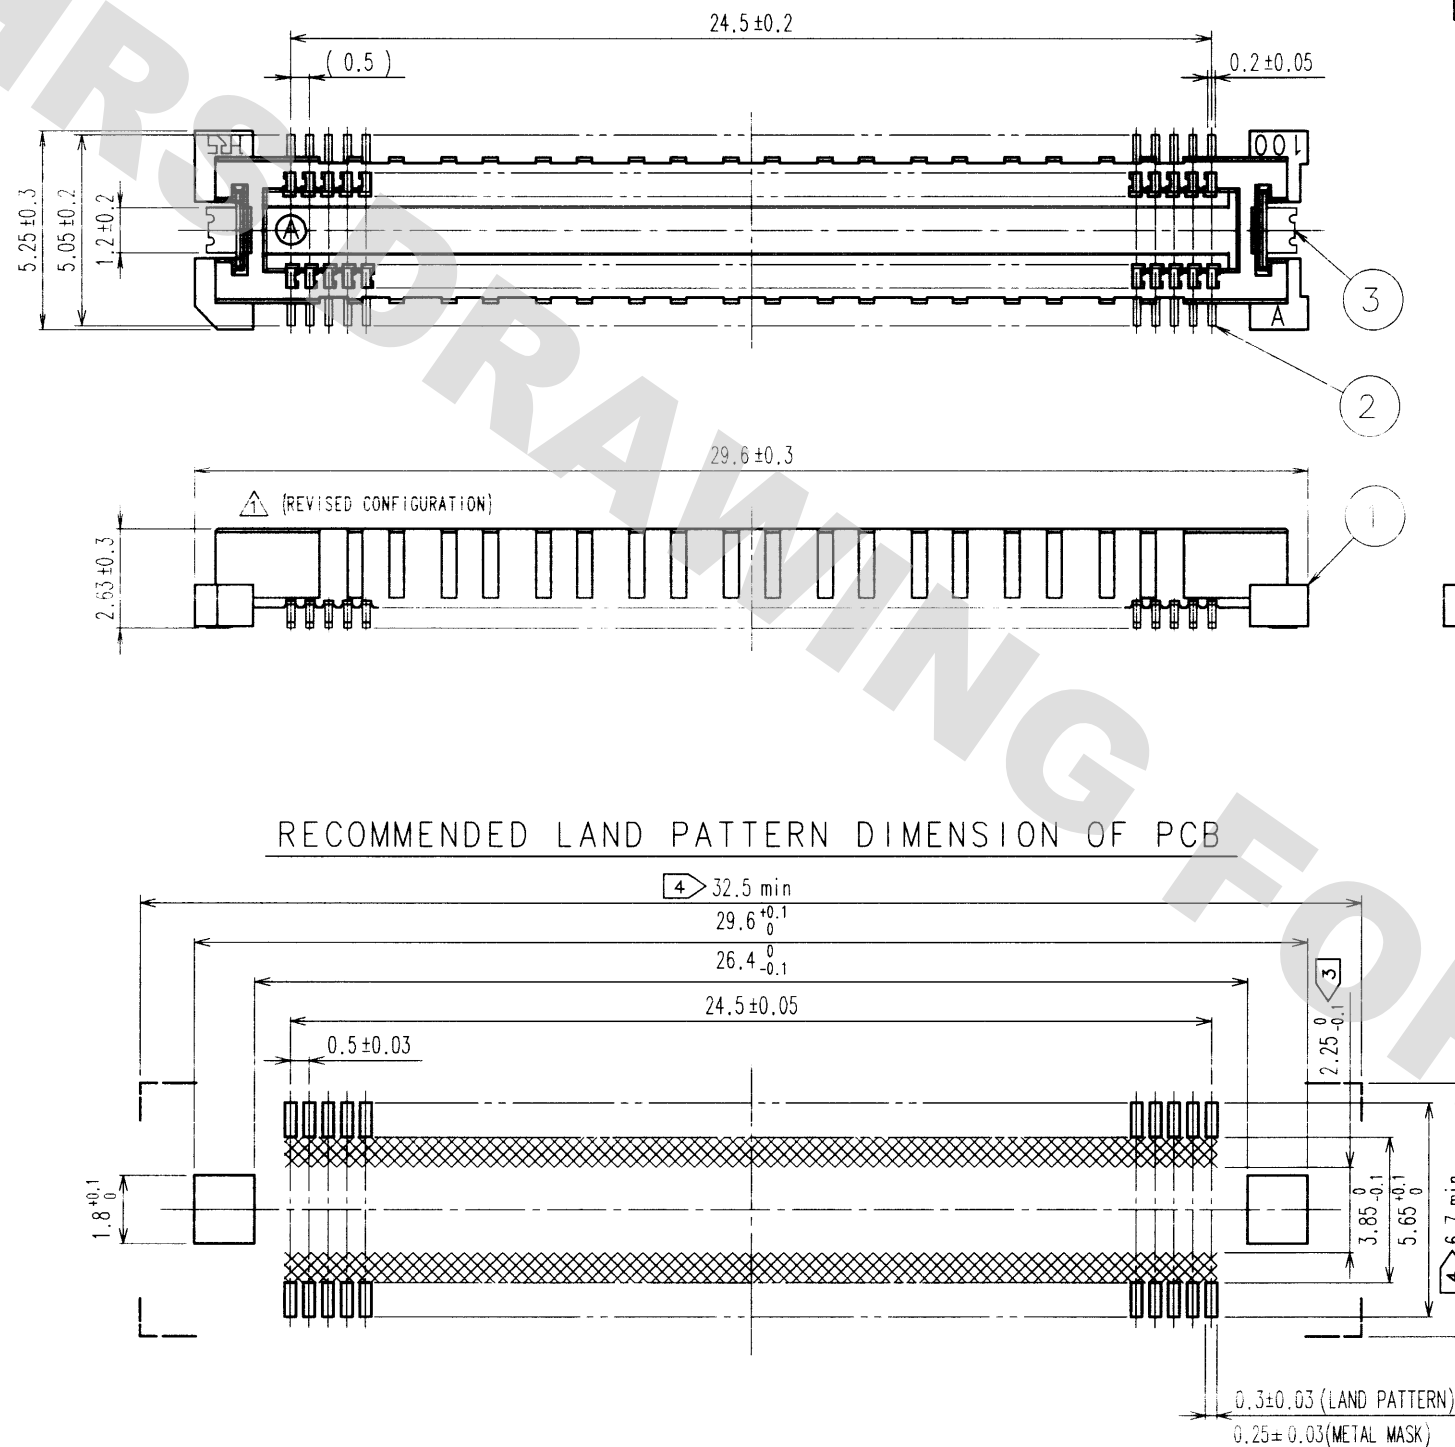

RECOMMENDED LAND PATTERN DIMENSION OF PCB

SIGNAL PORTION CROSS SECTION (10:1)

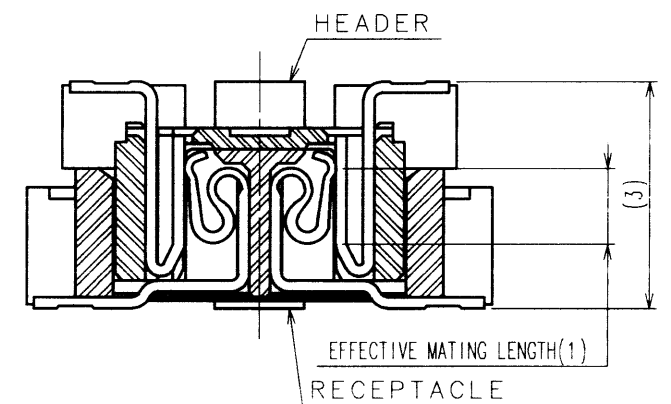

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 DO NOT MOUNT OTHER DEVICES ONTO □ AREA, OR MATING PAIR CANNOT BE MATED.
 - 5 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	RE-F-06821	J.M	H.O	00.04.06					

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL							
		LEAD: GOLD FLASH OVER NICKEL							
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS				
CODE NO. (OLD)	CL		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED		
			J.MATSUKAWA	J.MATSUKAWA	M.ISHIDA	Y.YOSHIMURA			
			00.01.15	00.01.15	00.01.17	00.01.17			
SCALE	5 : 1	DRAWING NO.	EDC3-152628-01	PART NO.	FX11B-100P-SV0.5(21)				
UNITS	mm	HRS	HIROSE ELECTRIC CO., LTD.	CODE NO.	CL573-0653-5-21				

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

