



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

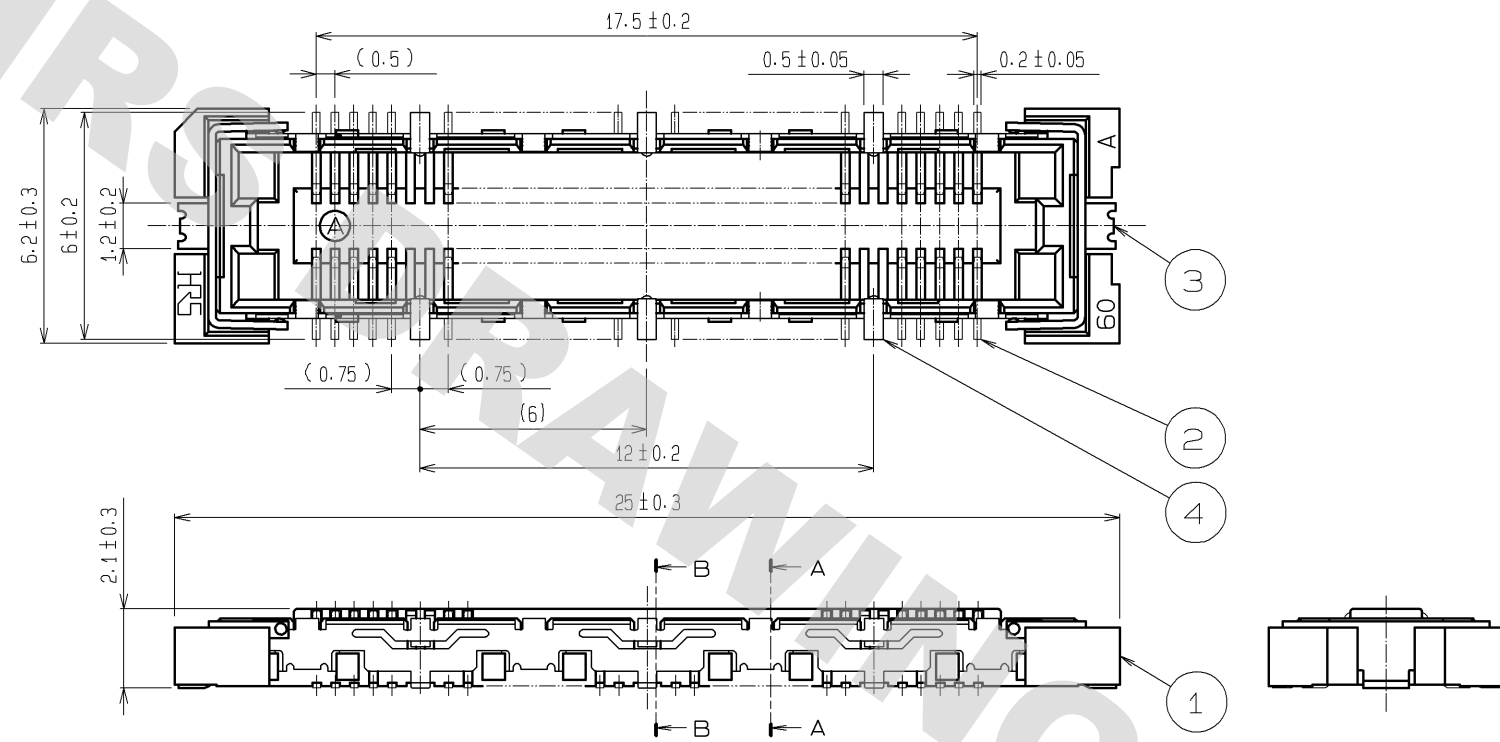


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

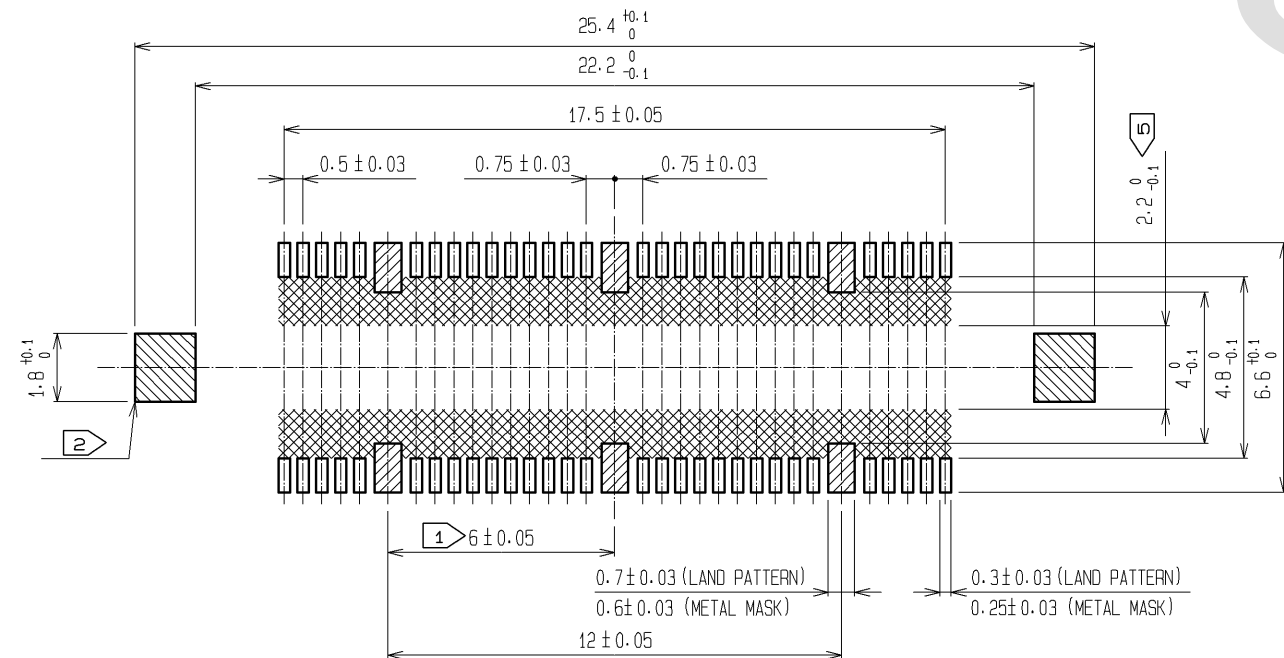


- NOTES
- ③ 6 HATCHED PARTS: GROUND CIRCUIT.
 - ② 2 HATCHED PARTS: GROUND CIRCUIT.
 - ③ SMT LEAD-COPLANARITY: 0.1 MAX.
 - ④ THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - ⑤ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND .OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - ⑥ TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - ⑦ THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

A-A (10 : 1)

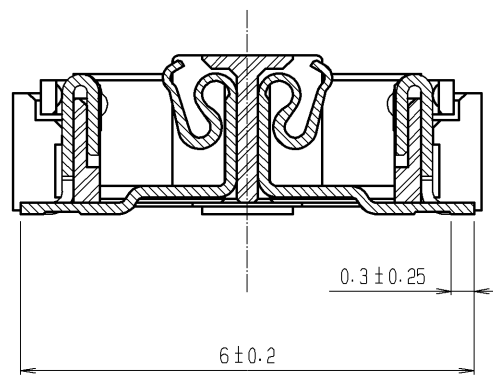

B-B (10 : 1)

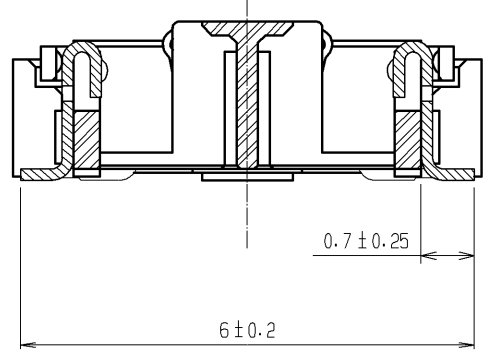


3, 4	PHOSPHOR BRONZE	TIN PLATING						
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min.						
		LEAD AREA : GOLD FLASH						
		UNDER PLATING : NICKEL 1μm min.		6	PET	TOP COVER TAPE		
1	LCP	BEIGE UL94V-0		5	PS	EMBOSSD CARRIER TAPE		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	08.06.13	DRAWING NO. EDC3-152636-21				
		CHECED : HT. YAMAGUCHI	08.06.13	PART NO. FX11B-60S/6-SV(91)				
		DESIGNED : SY. KAMIGA	08.06.13	CODE NO. CL573-0712-2-91				
		DRAWN : HK. SUNADORI	08.06.13	 1/2				




DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

DRAWING FOR PACKING(2:1)


REELED DIMENSION(Free)

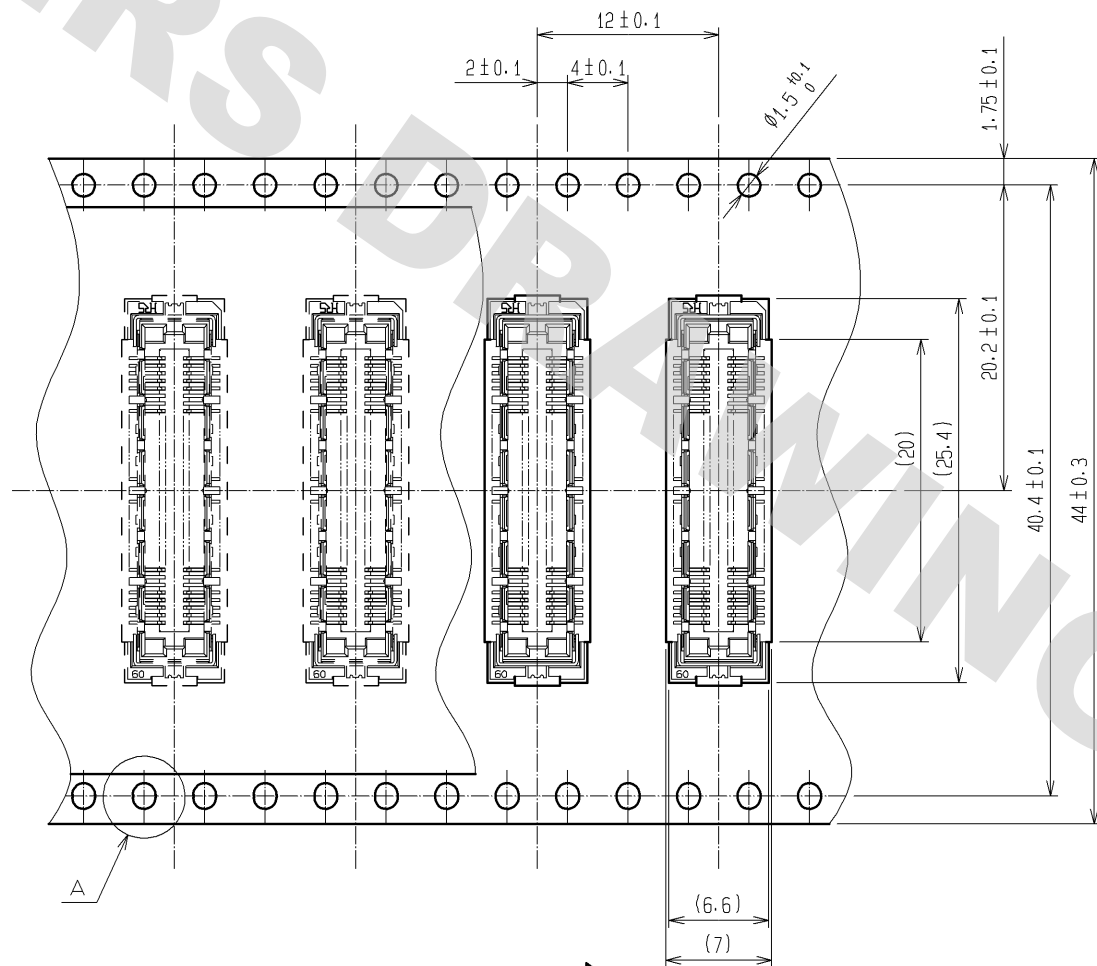

THE DIRECTION OF PULLING OUT →

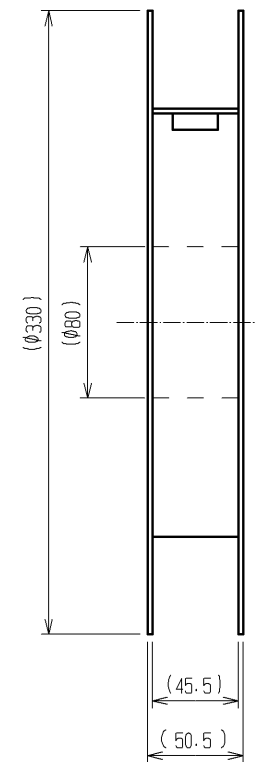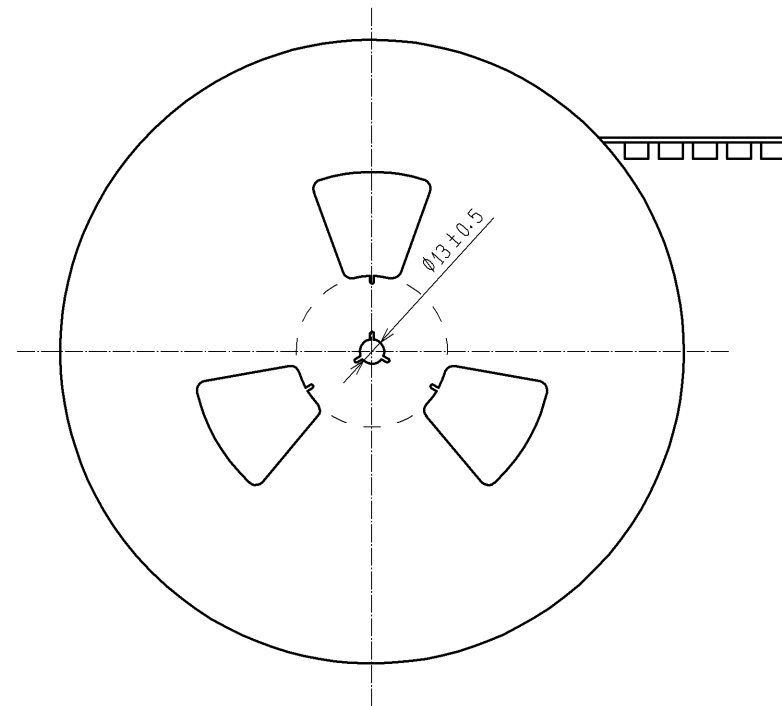

A(5:1)



- NOTES
- 1 REEL : 1000 CONNECTORS.
 - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - 3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS

DRAWING NO.	EDC3-152636-21
PART NO.	FX11B-60S/6-SV(91)
CODE NO.	CL573-0712-2-91

2/2