



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

A
B
C
D
E
F

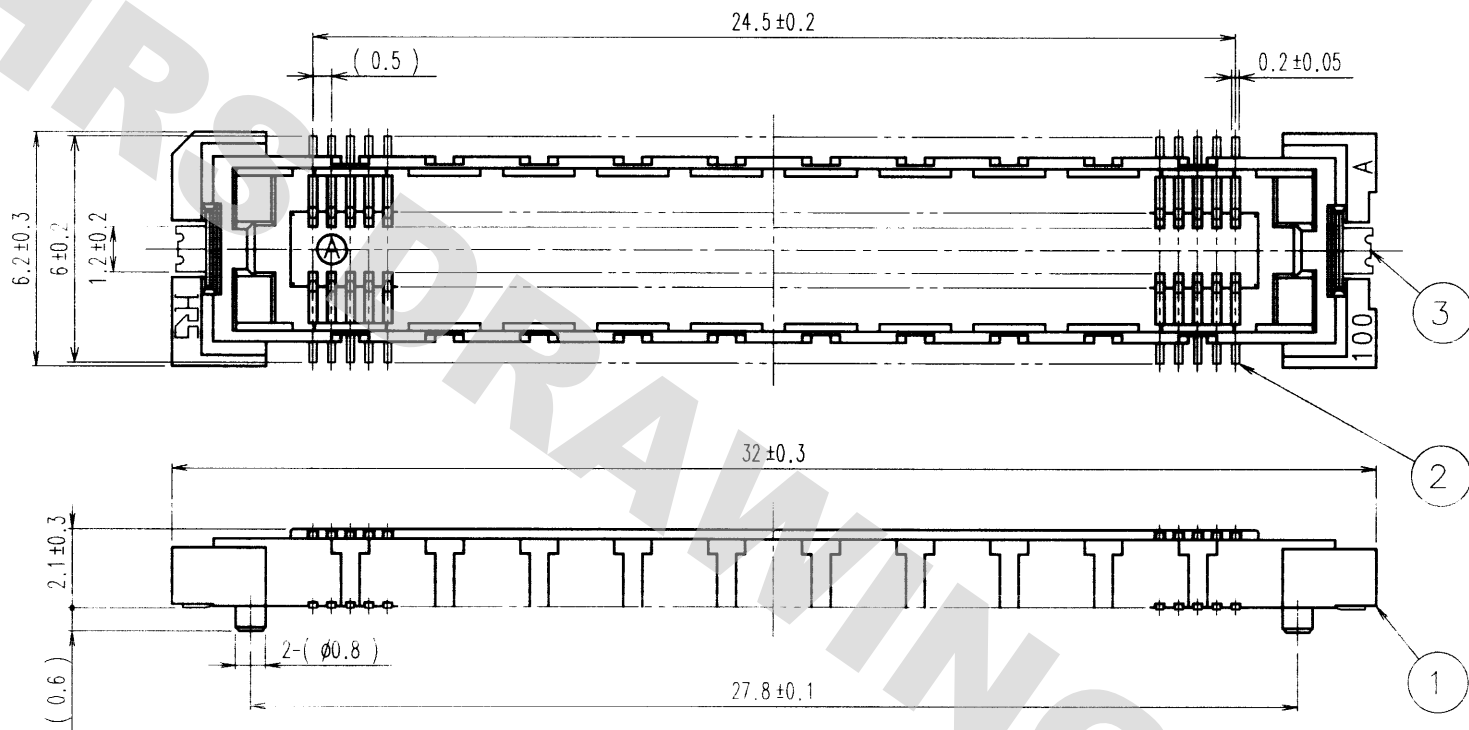

RECOMMENDED LAND PATTERN DIMENSION OF PCB

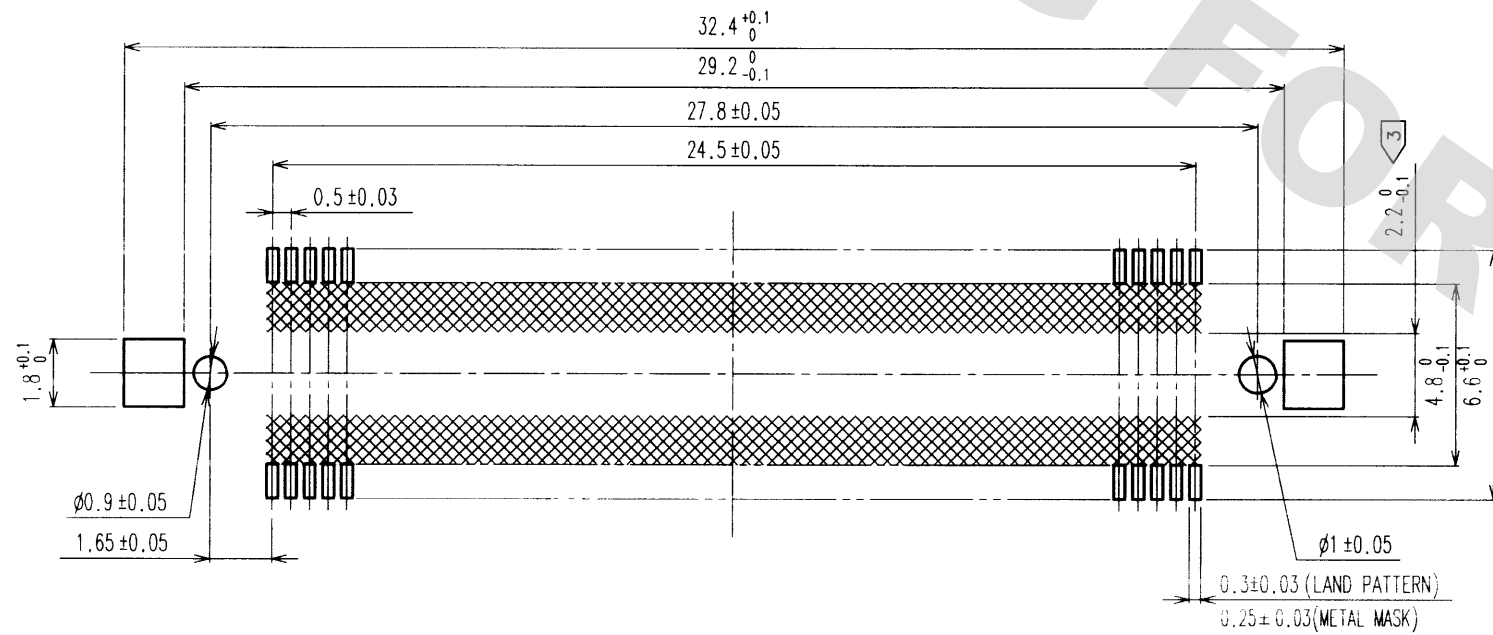

- NOTES
- 1 SMT LEAD-COPLANARITY:0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD (0.1µm) OVER NICKEL			
		LEAD:GOLD FLASH OVER NICKEL			
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL		DRAWN f. Matsukawa	DESIGNED f. Matsukawa	CHECKED M. Ishida	APPROVED f. Shimura
		00.01.15	00.01.15	00.01.17	00.01.17
SCALE 5 : 1		DRAWING NO. EDC3-152641		PART NO. FX11A-100S-SV	
UNITS mm		HRS HIROSE ELECTRIC CO.,LTD.		CODE NO. CL573-0743-6	
				1/1	

A
B
C
D
E
F