


DRAWING FOR REFERENCE: This is subject to change without notice  
08/11/2012

TO  
PCK

A  
B  
C  
D  
E  
F

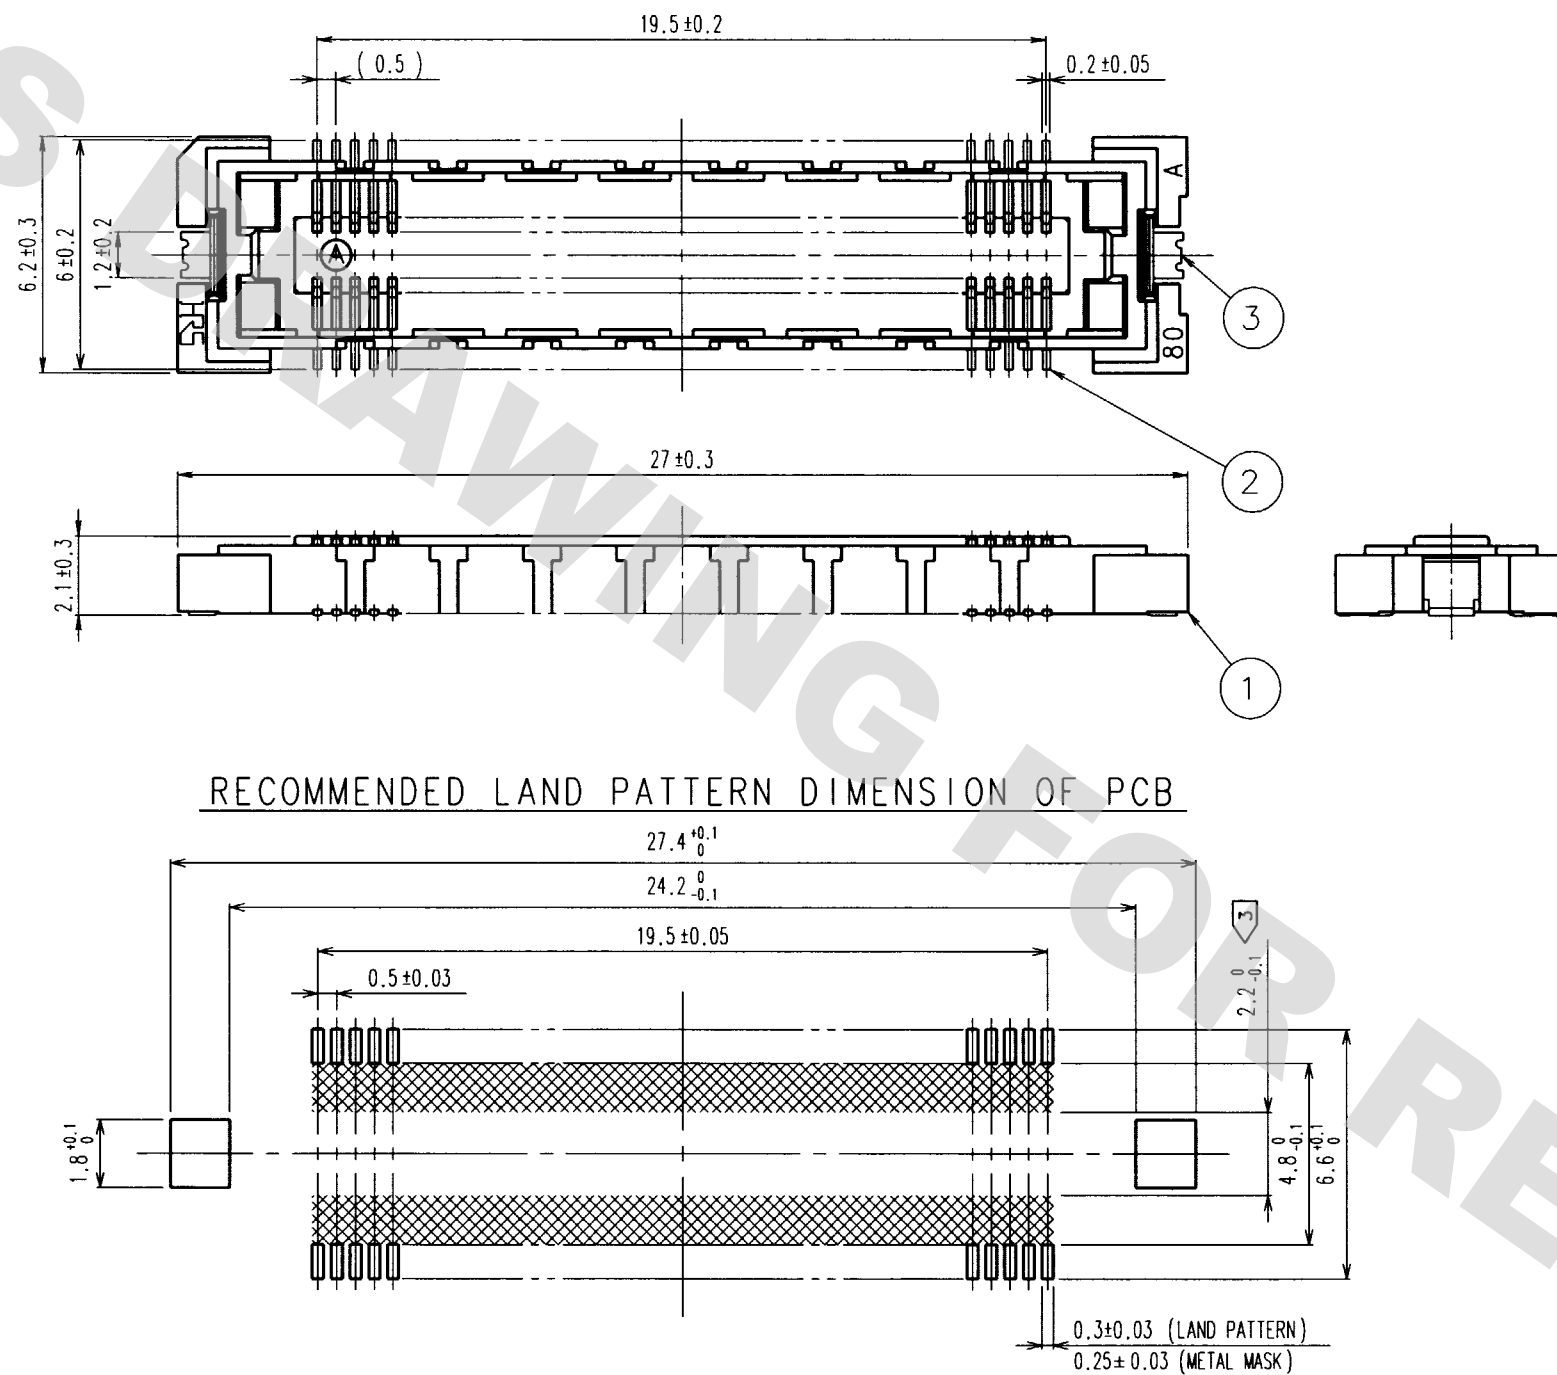

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
  - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				. .	△				. .
△				. .	△				. .
△				. .	△				. .

2	PHOSPHOR BRONZE	CONTACT AREA: GOLD (0.1μm) OVER NICKEL			
		LEAD: GOLD FLASH OVER NICKEL			
1	LCP	BEIGE UL94V-0	3	PHOSPHOR BRONZE	TIN PLATED
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED
CL					
		00.04.28	00.04.28	00.04.28	00.05.09
SCALE		DRAWING NO.		PART NO.	
5 : 1		EDC3-152648		FX11B-80S-SV	
UNITS		HRS		CODE NO.	
mm		HIROSE ELECTRIC CO., LTD.		CL573-0758-3	
				1/1	