


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO

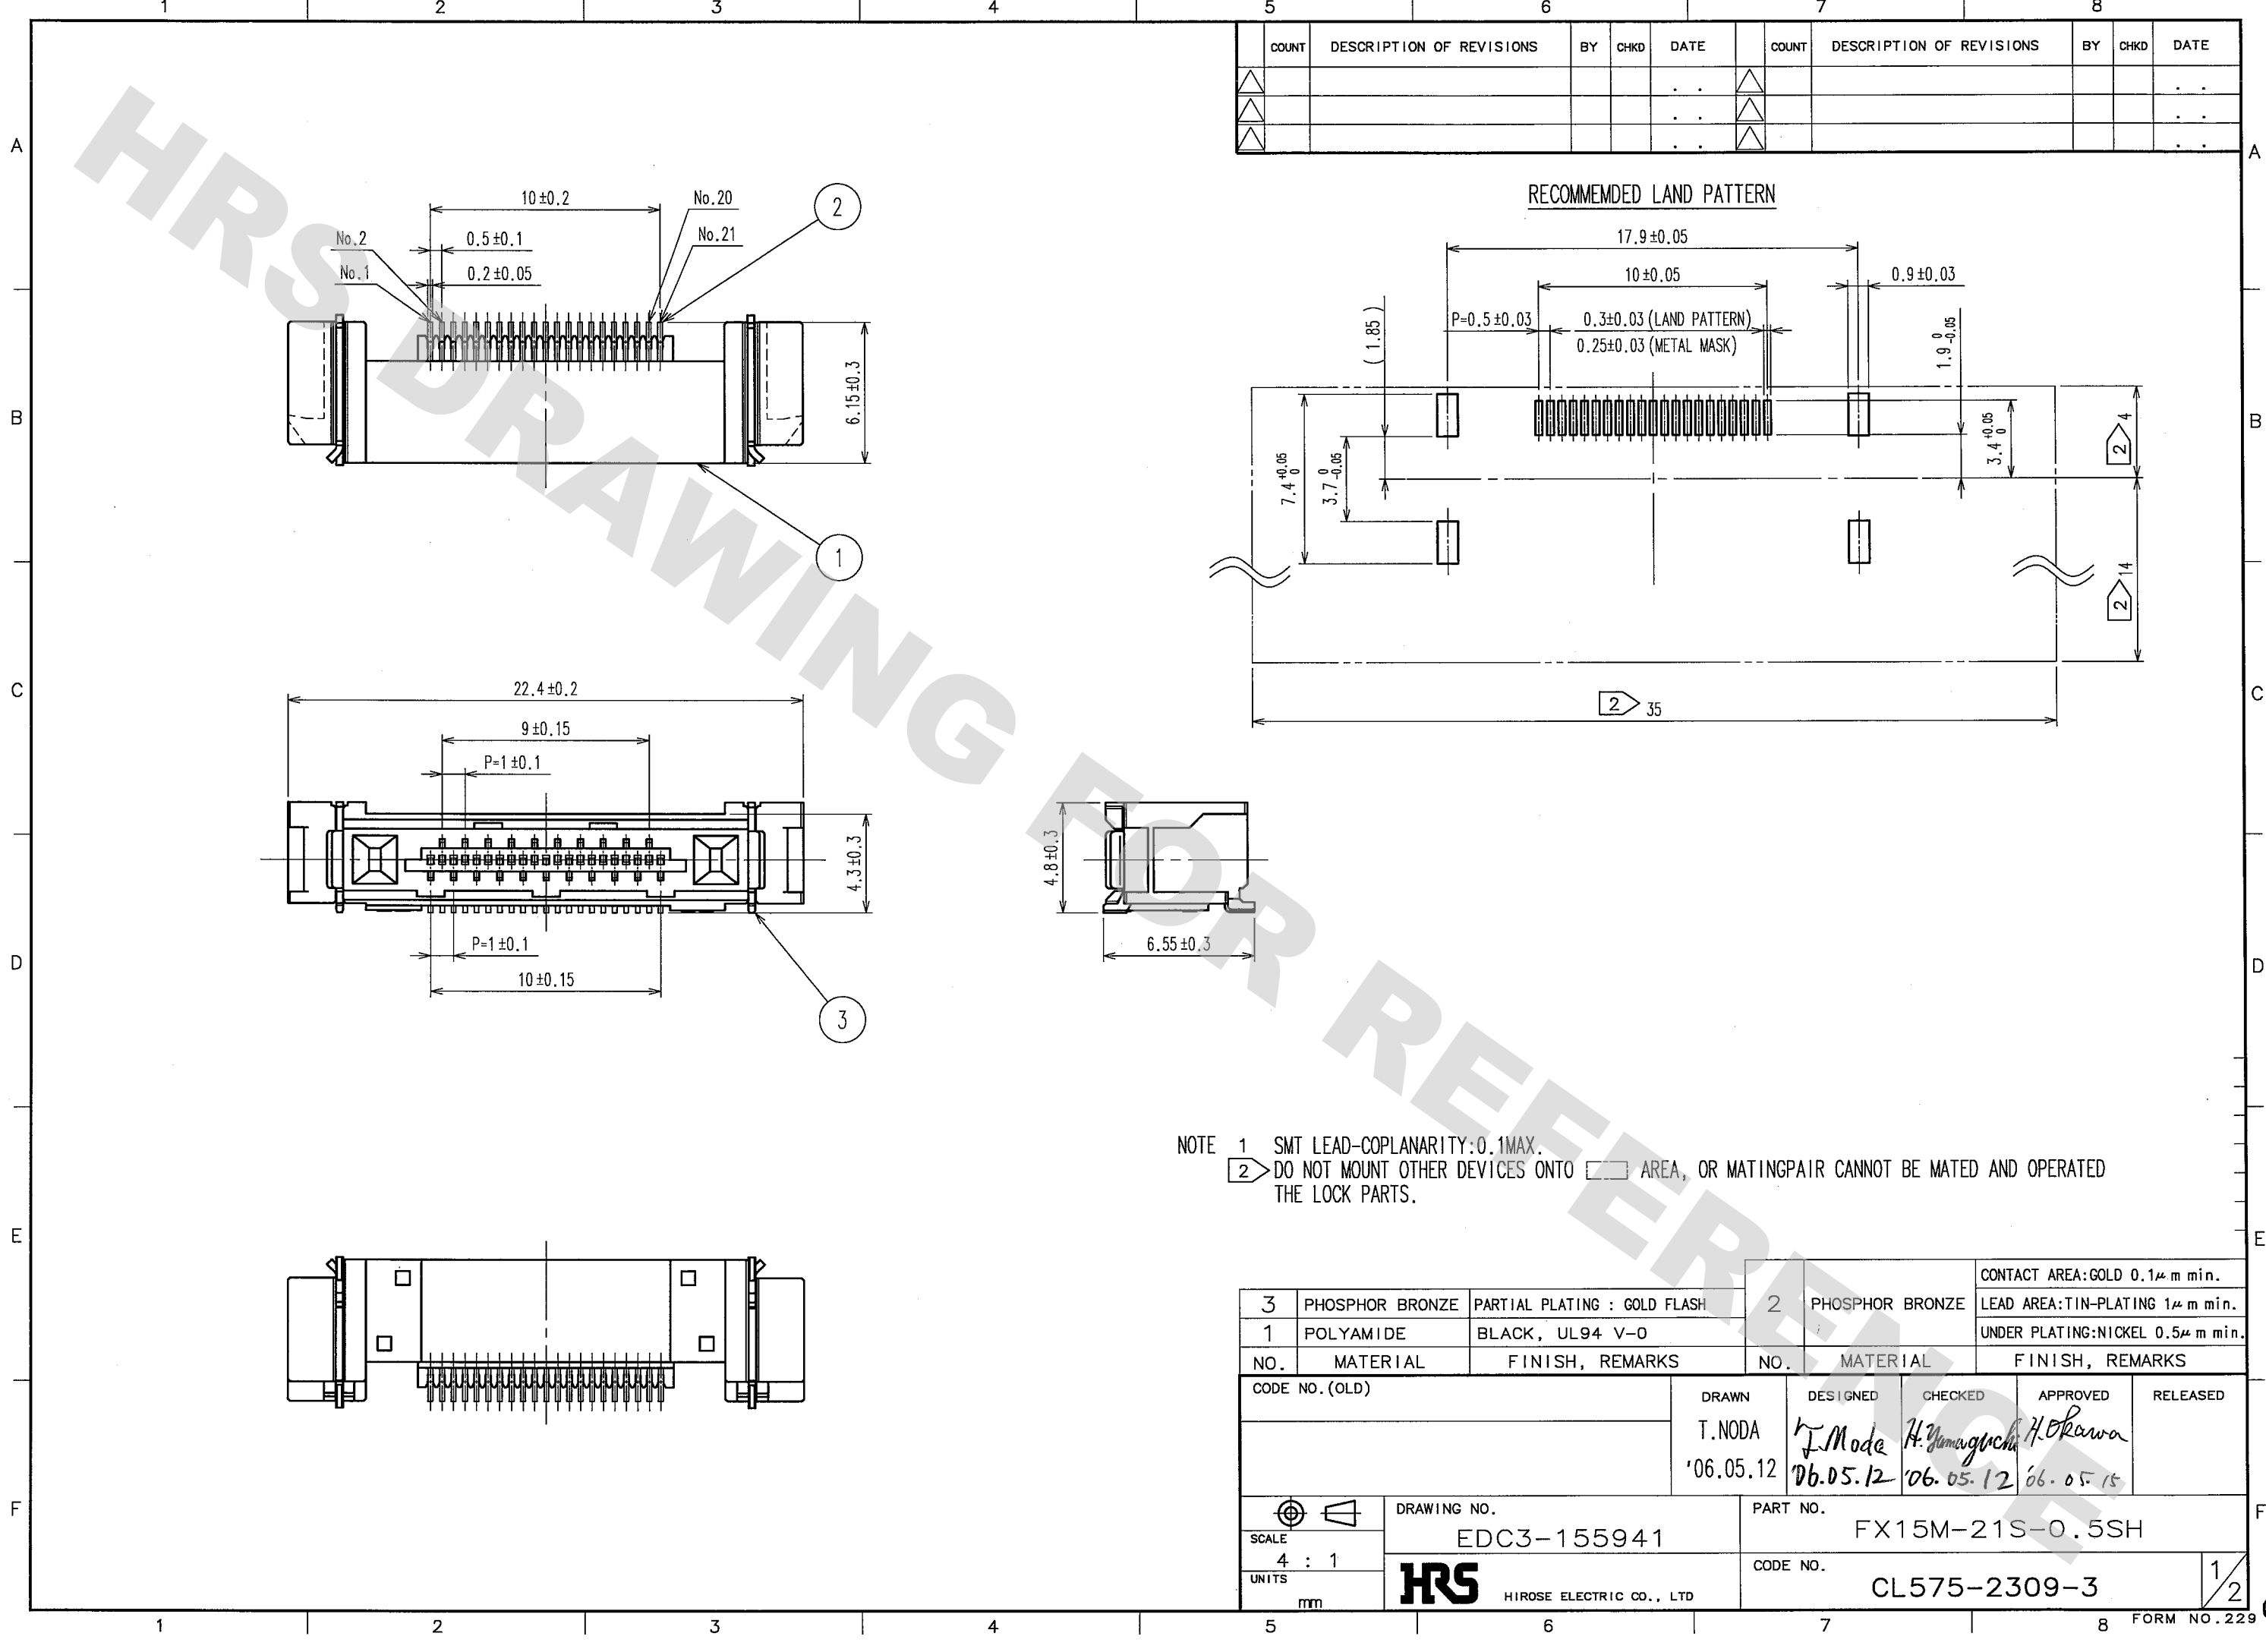


NOTE 1 SMT LEAD-COPLANARITY:0.1MAX.
2 DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATINGPAIR CANNOT BE MATED AND OPERATED THE LOCK PARTS.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

3	PHOSPHOR BRONZE	PARTIAL PLATING : GOLD FLASH	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μ m min.
1	POLYAMIDE	BLACK, UL94 V-0			LEAD AREA:TIN-PLATING 1μ m min.
					UNDER PLATING:NICKEL 0.5μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)			DRAWN T.NODA '06.05.12		
			DESIGNED J.Mode '06.05.12		
			CHECKED H.Yamaguchi '06.05.12		
			APPROVED H.Okawa '06.05.15		
			RELEASED		
DRAWING NO. EDC3-155941			PART NO. FX15M-21S-0.5SH		
SCALE 4 : 1			CODE NO. CL575-2309-3		
UNITS mm			1/2		
HRS HIROSE ELECTRIC CO., LTD					

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO

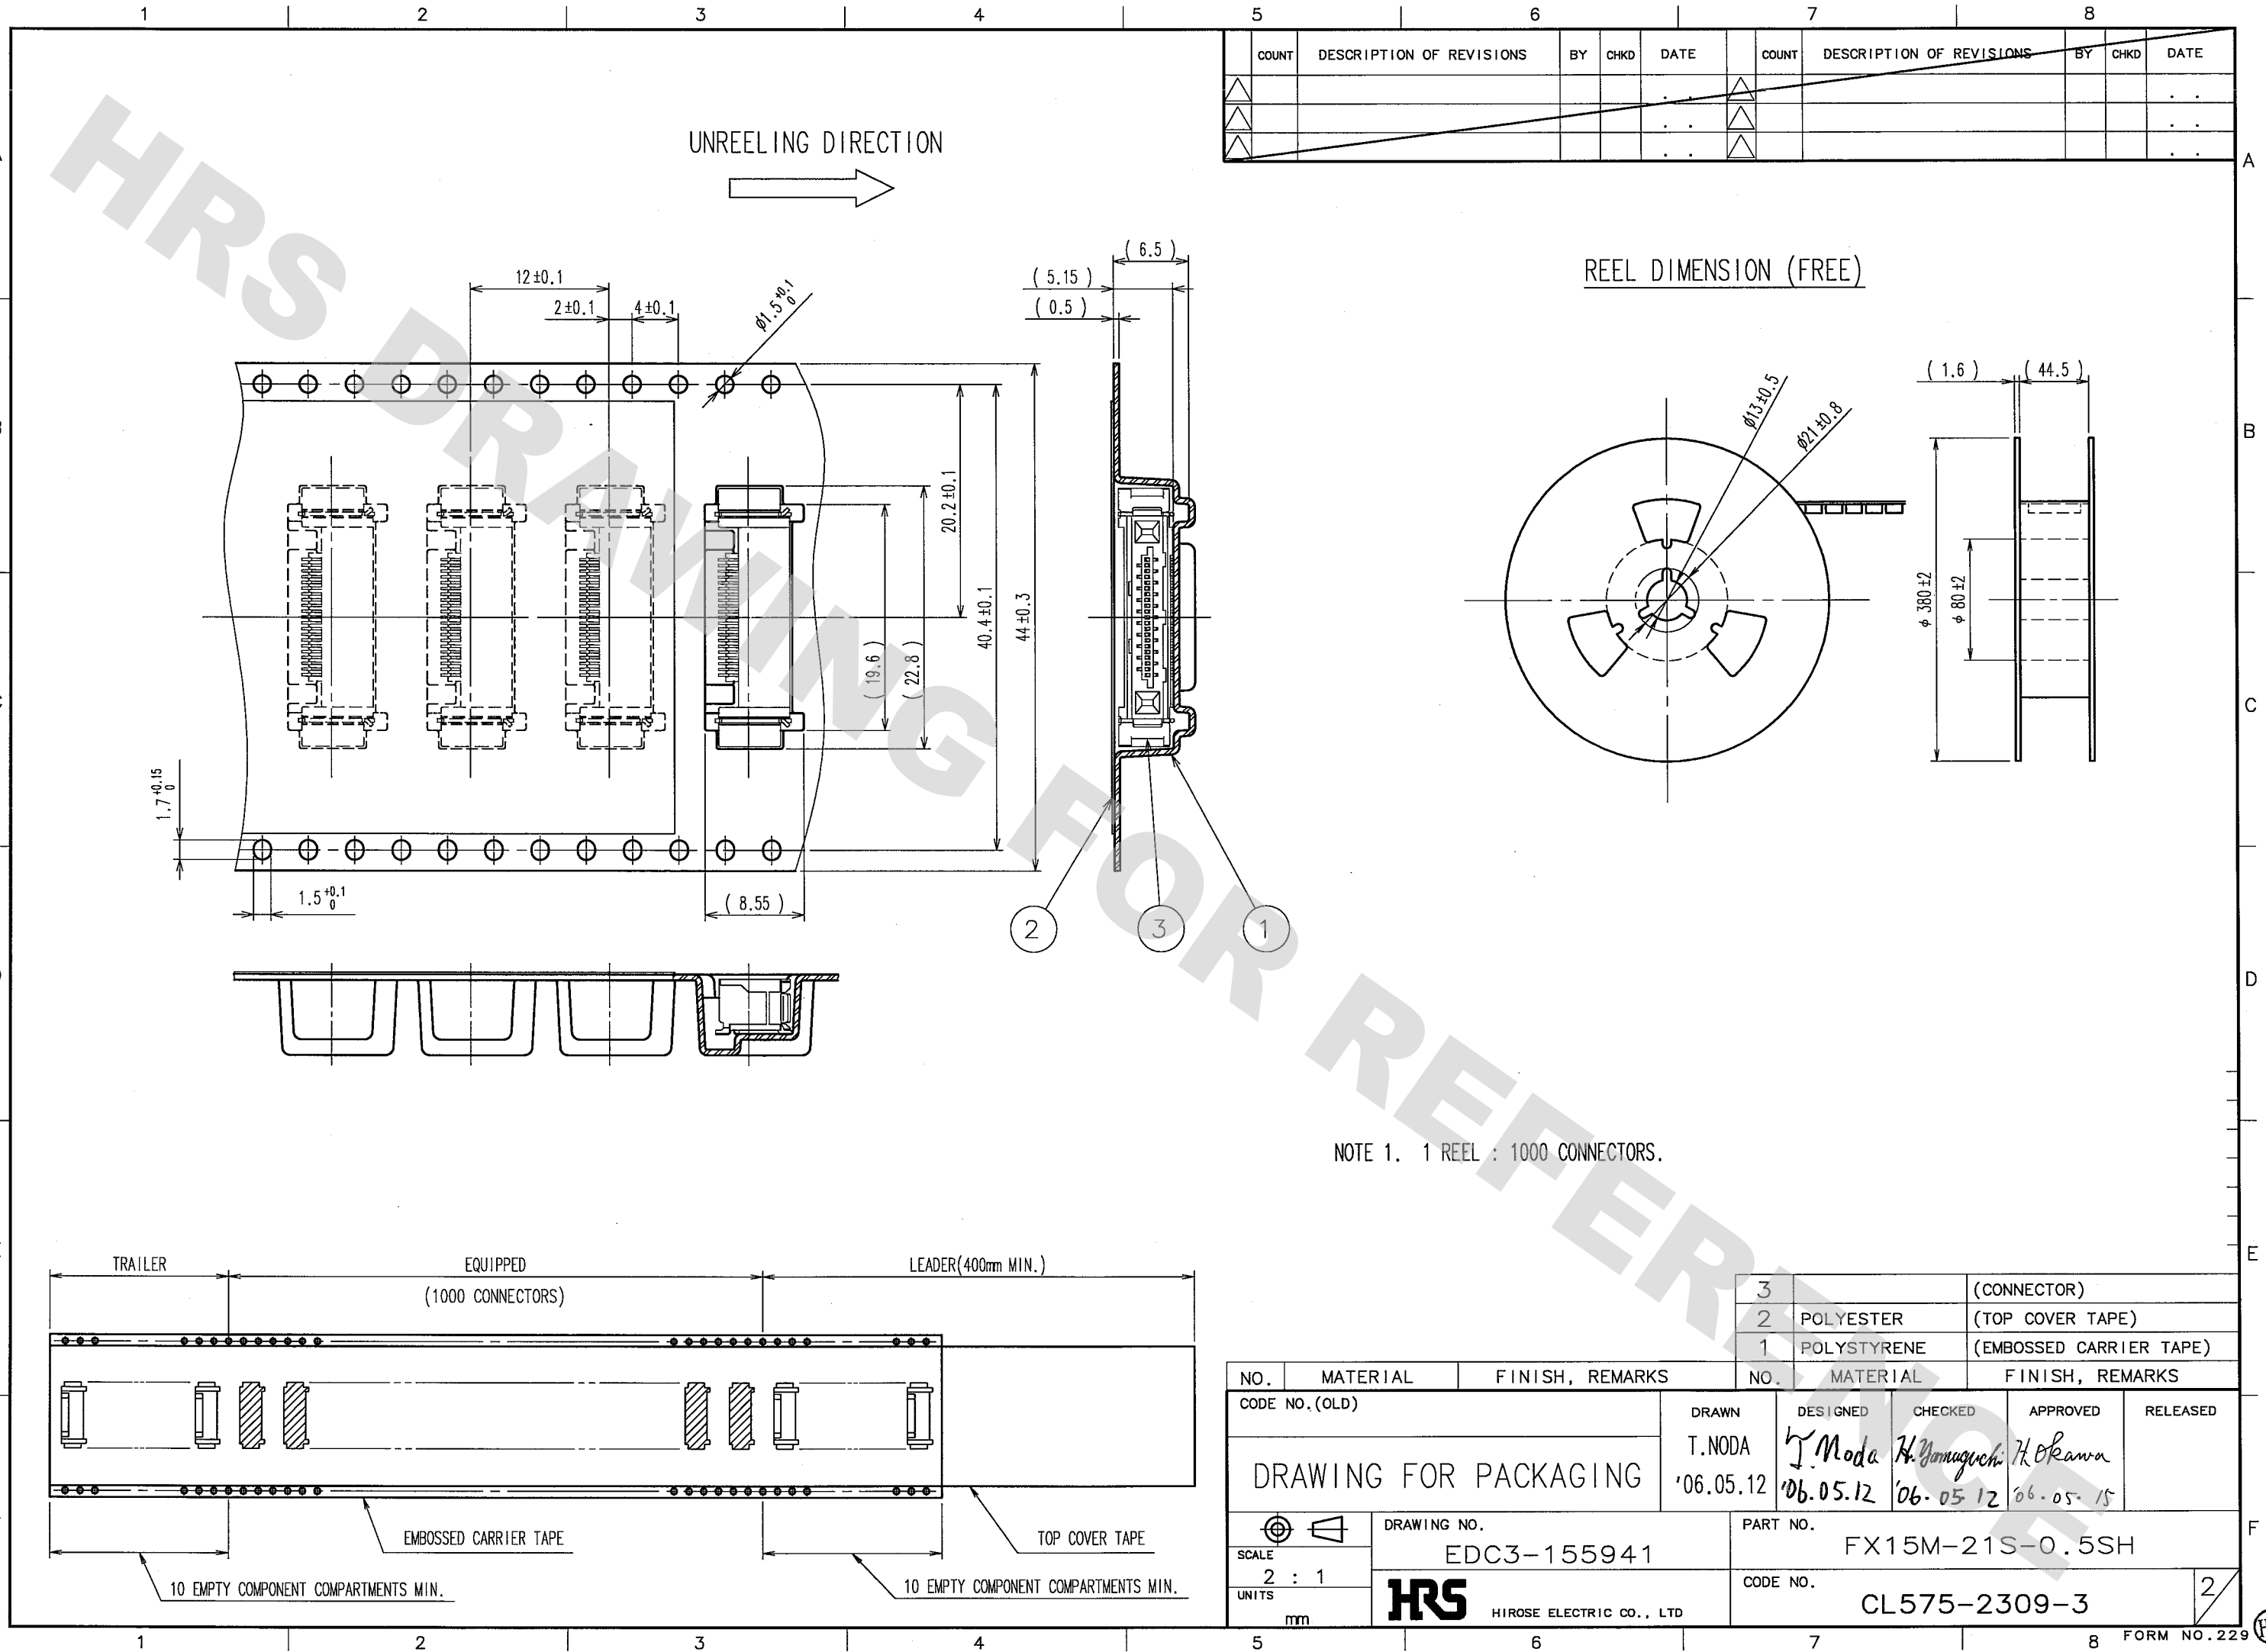

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
3		(CONNECTOR)	3	POLYESTER	(TOP COVER TAPE)
2			1	POLYSTYRENE	(EMBOSSED CARRIER TAPE)
1					

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	T.NODA	T.NODA	H. Yamaguchi	H. Okawa	
	'06.05.12	'06.05.12	'06.05.12	'06.05.15	

DRAWING NO.	PART NO.
EDC3-155941	FX15M-21S-0.5SH
SCALE	CODE NO.
2 : 1	CL575-2309-3
UNITS	
mm	

HRS	HIROSE ELECTRIC CO., LTD
-----	--------------------------