
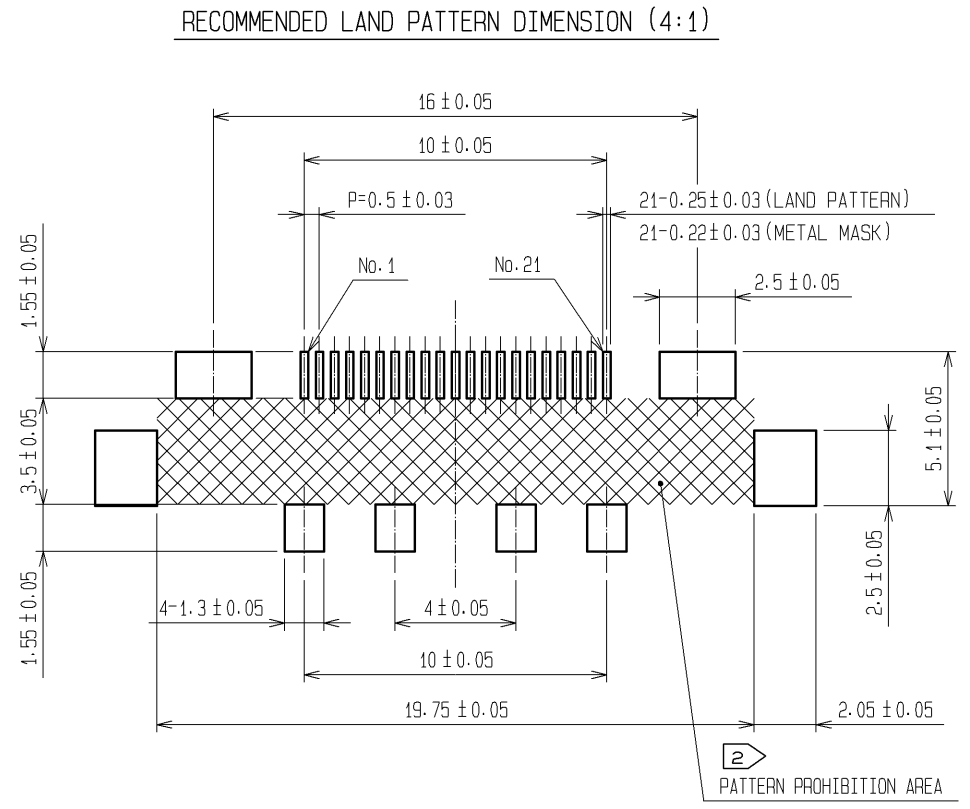
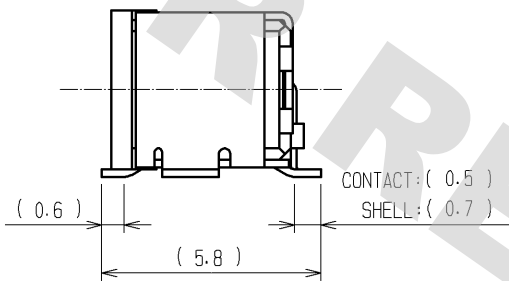


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

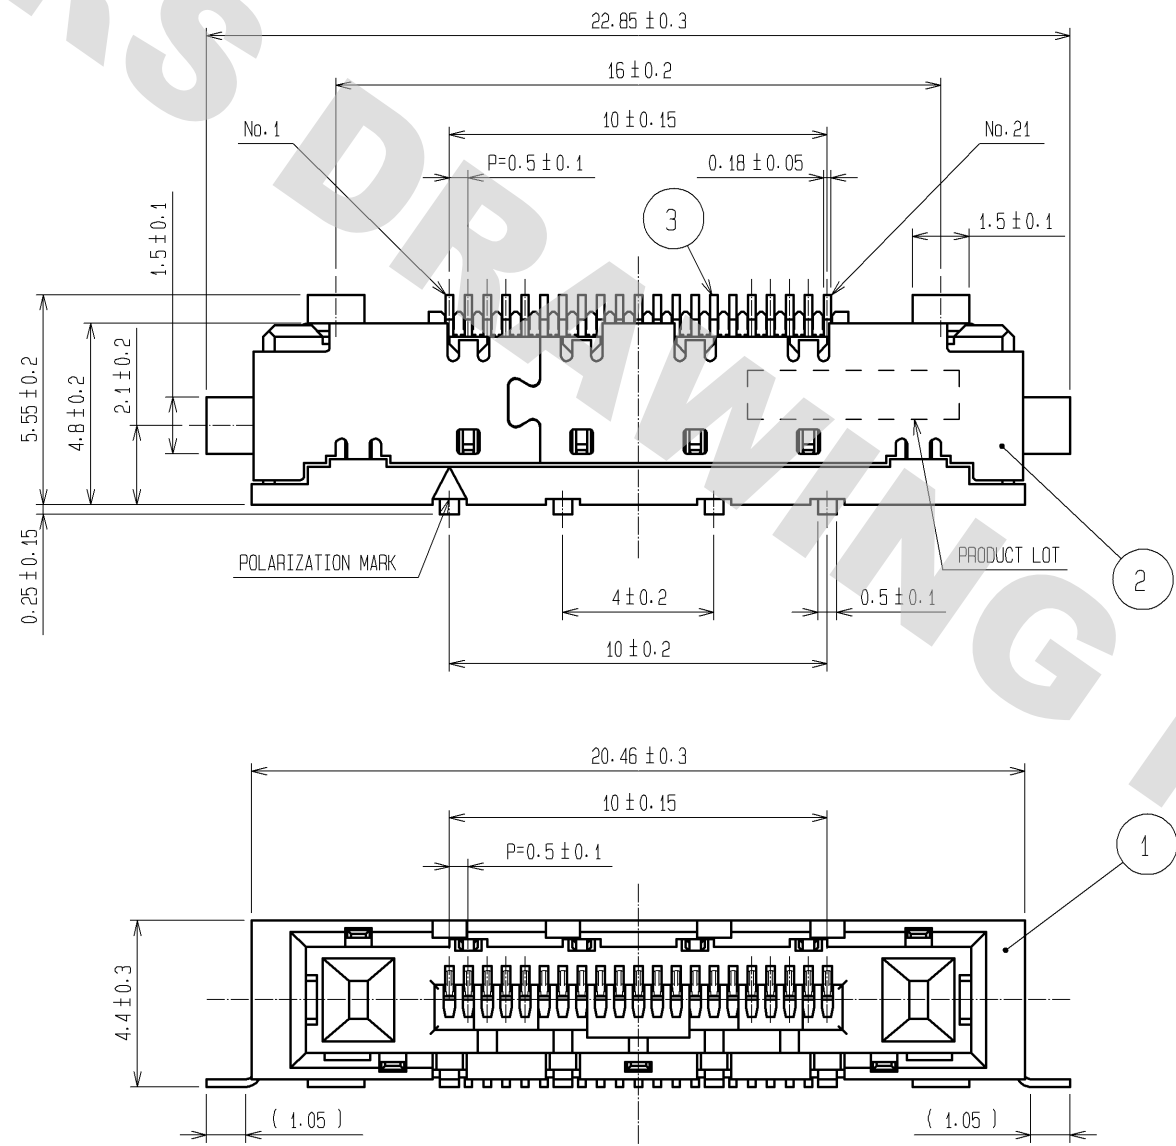

- NOTE 1 LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.
2 AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.
3 () INDICATES A REFERENCE DIMENSION.
4 MANUFACTURING PROCESS COULD LEAVE SCRATCH AND/OR PUNCH MARKS HAVING NO AFFECT ON THE PRODUCT PERFORMANCE.
5 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.



2	PHOSPHOR BRONZE	OVER PLATING:TIN PLATING 1μm min	3	5	PE	(COVER TAPE)
		UNDER PLATING:NICKEL 0.2μm min		4	PS	(EMBOSSED CARRIER TAPE)
	1	LCP		BLACK, UL94V-0		
						LEAD AREA:GOLD 0.03μm min
						UNDER PLATING:NICKEL 1μm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS	

UNITS mm		SCALE 5 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-002932	DESIGNED KN. SHIBUYA	CHECKED HT. YAMAGUCHI	DATE 08.03.27
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	08.01.24	DRAWING NO. EDC3-157339-00				
		CHECED : HT. YAMAGUCHI	08.01.24	PART NO. FX16-21S-0.5SH				
		DESIGNED : KN. SHIBUYA	08.01.24	CODE NO. CL575-3411-5-00				
		DRAWN : KN. SHIBUYA	08.01.24					






DRAWING FOR PACKING(2:1)

THE DIRECTION OF PULLING OUT

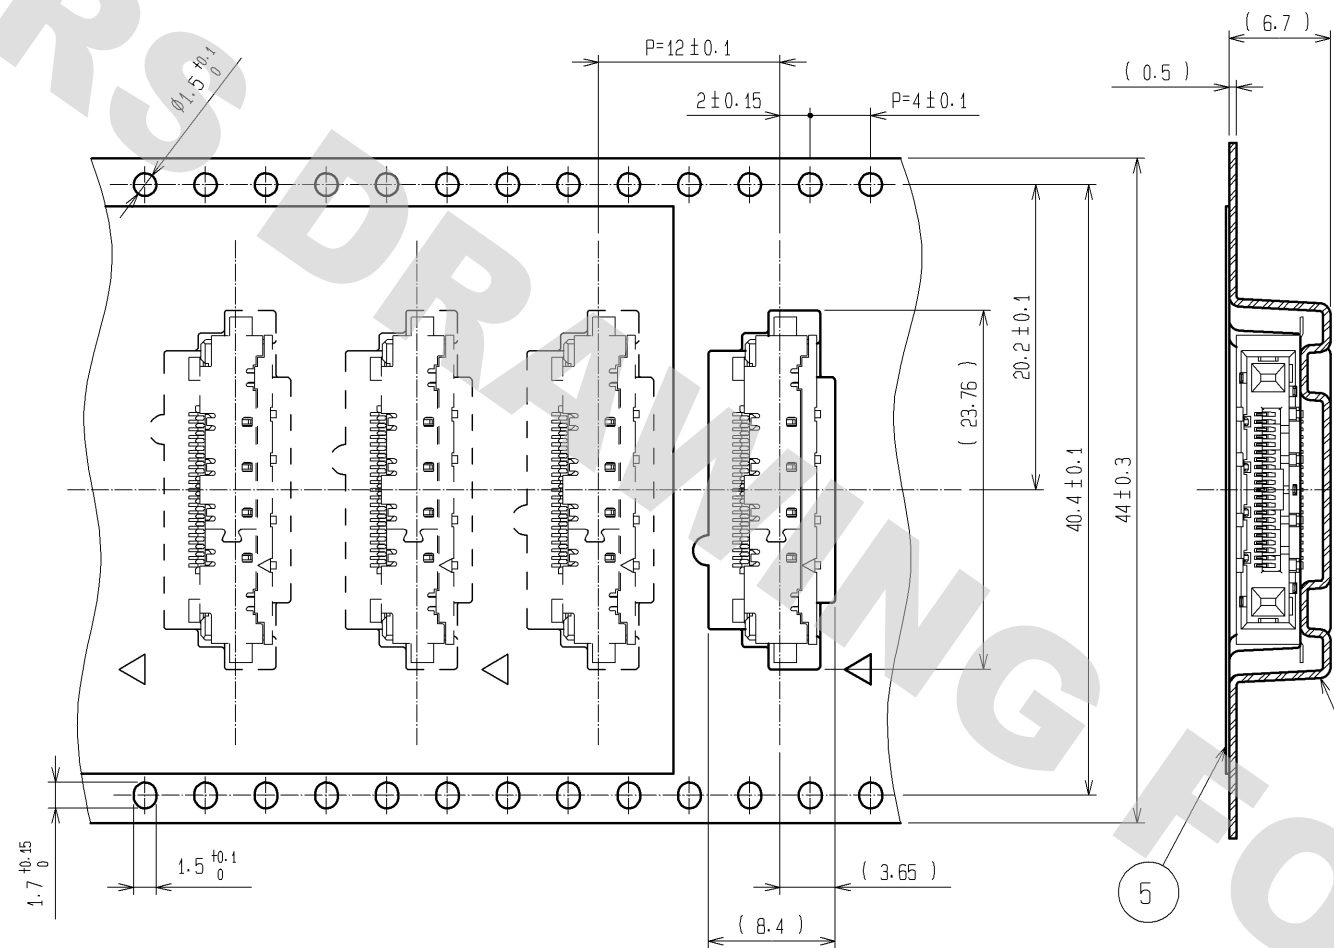

REELED DIMENSION (FREE)

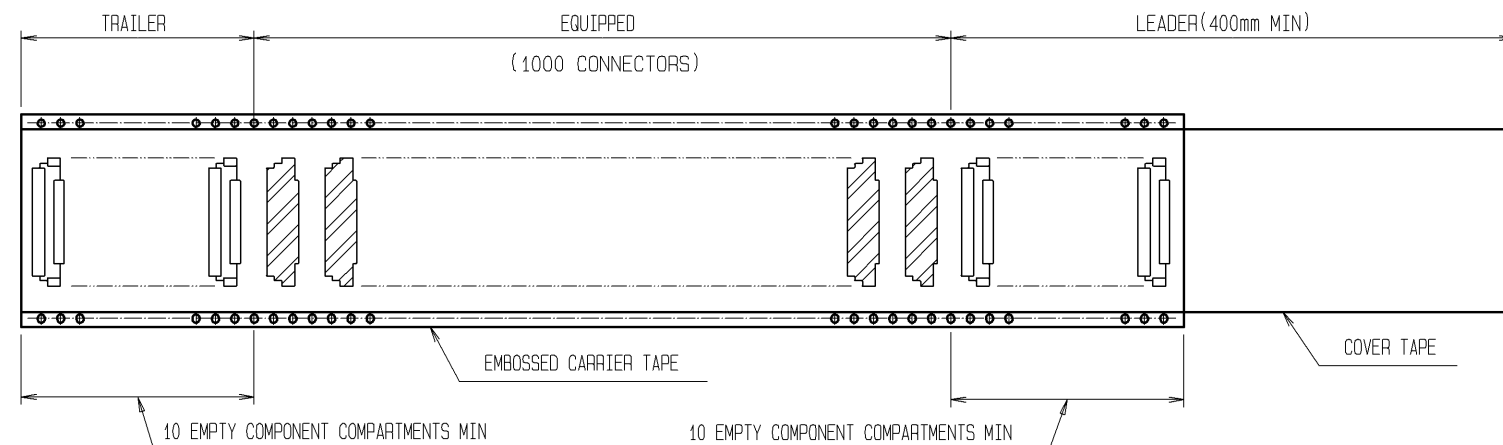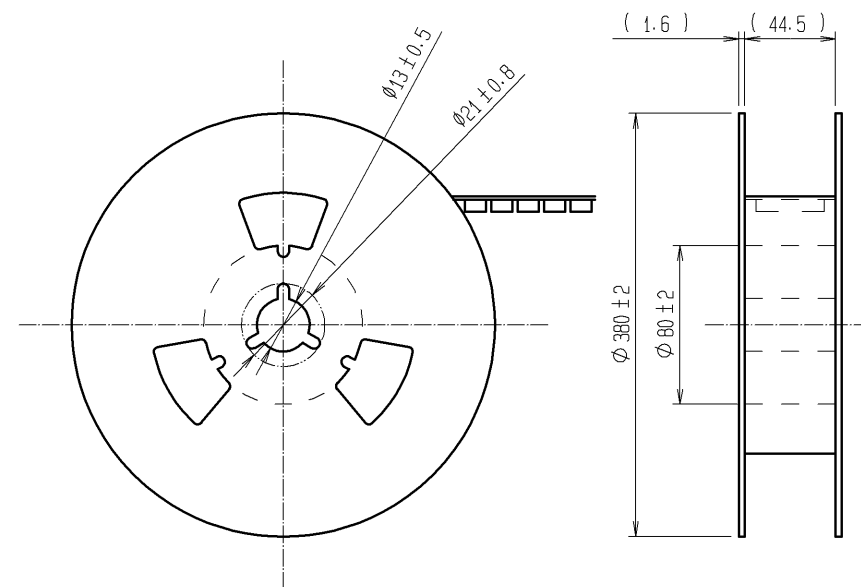

HRS

DRAWING NO.	EDC3-157339-00
PART NO.	FX16-21S-0.5SH
CODE NO.	CL575-3411-5-00

2/2

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012