
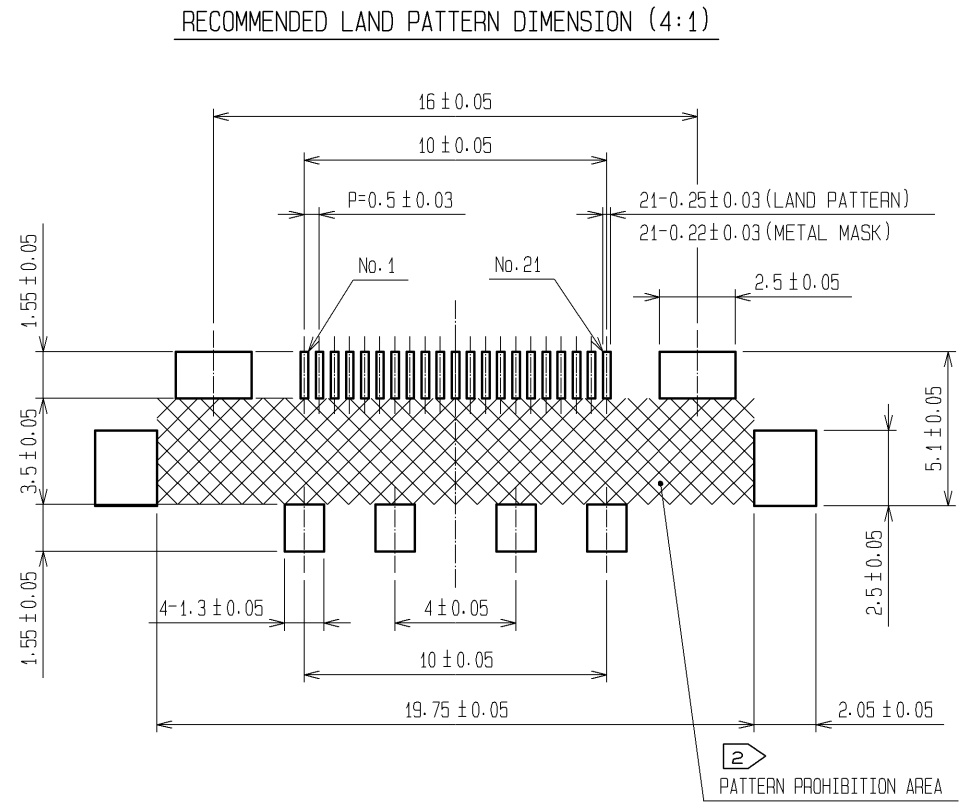
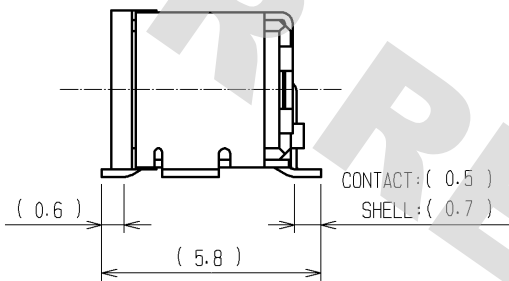
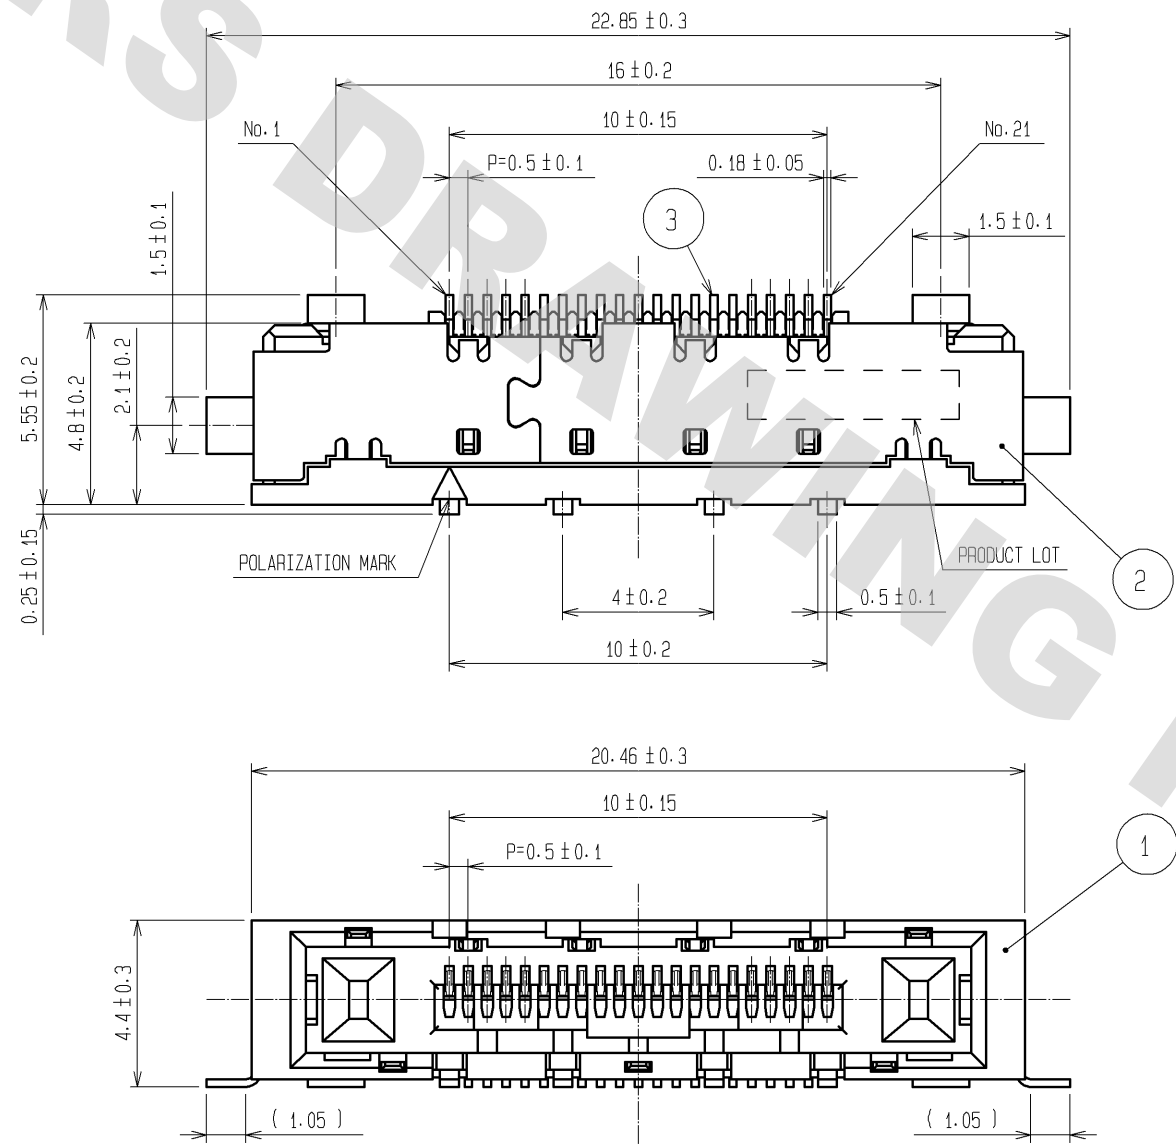


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012





- NOTE 1 LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.
2 AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.
3 () INDICATES A REFERENCE DIMENSION.
4 MANUFACTURING PROCESS COULD LEAVE SCRATCH AND/OR PUNCH MARKS HAVING NO AFFECT ON THE PRODUCT PERFORMANCE.
5 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.




			5	PE	(COVER TAPE)					
			4	PS	(EMBOSSED CARRIER TAPE)					
2	PHOSPHOR BRONZE	OVER PLATING:TIN PLATING 1μm min	3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min					
		UNDER PLATING:NICKEL 0.2μm min			LEAD AREA:GOLD 0.03μm min					
1	LCP	BLACK, UL94V-0			UNDER PLATING:NICKEL 1μm min					
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS					
UNITS mm			SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.			APPROVED :HS. OKAWA		11.09.15	DRAWING NO. EDC3-157339-02				
			CHECED :HT. YAMAGUCHI		11.09.15	PART NO. FX16-21S-0.5SH(30)				
			DESIGNED :TS. MIYAKI		11.09.15	CODE NO.				
			DRAWN :TS. MIYAKI		11.09.15	CL575-3411-5-30				
						 1/2				

DRAWING FOR PACKING(2:1)

THE DIRECTION OF PULLING OUT

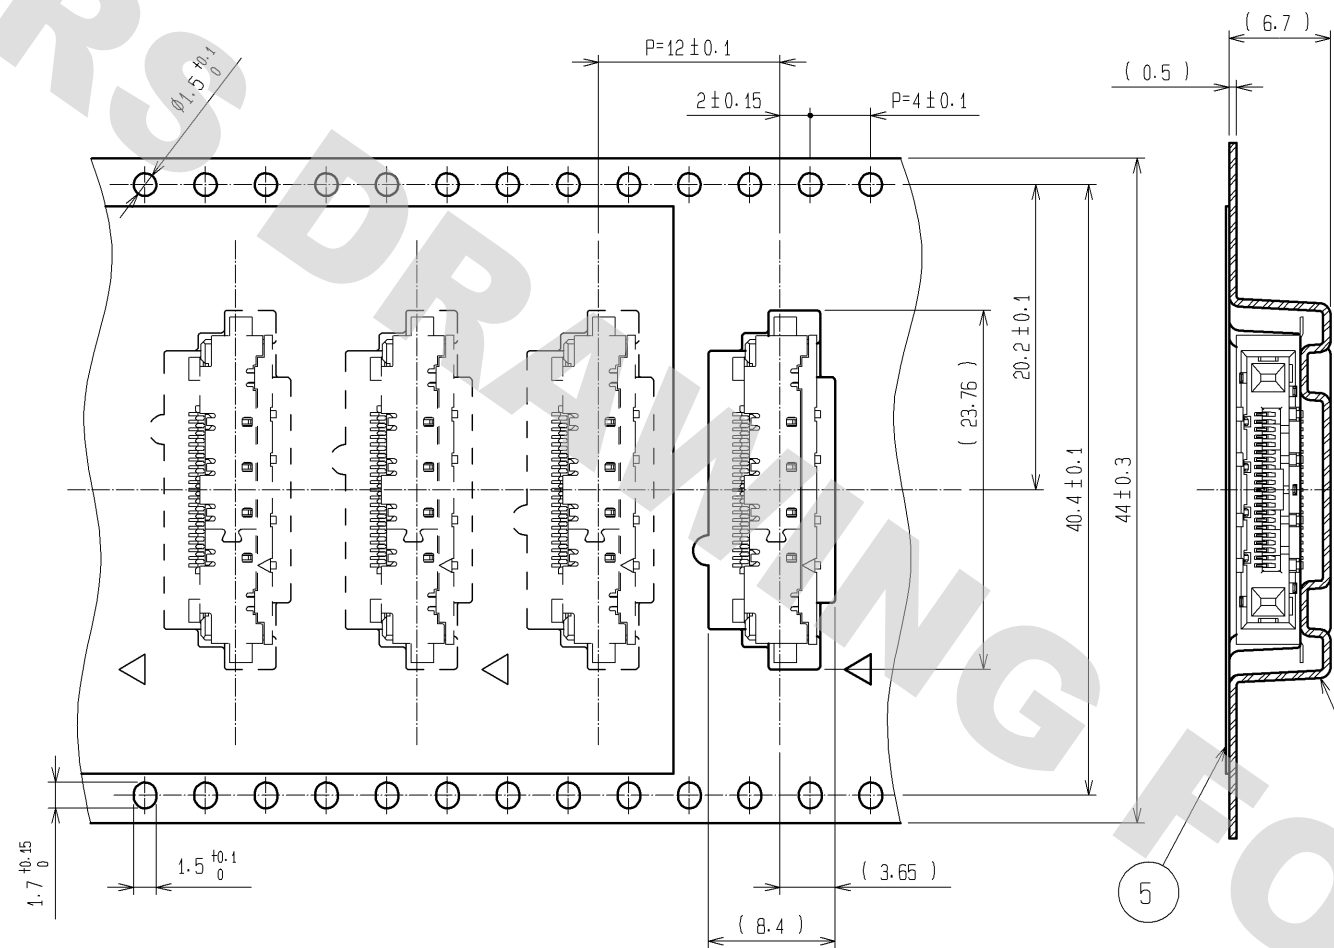

REELED DIMENSION (FREE)

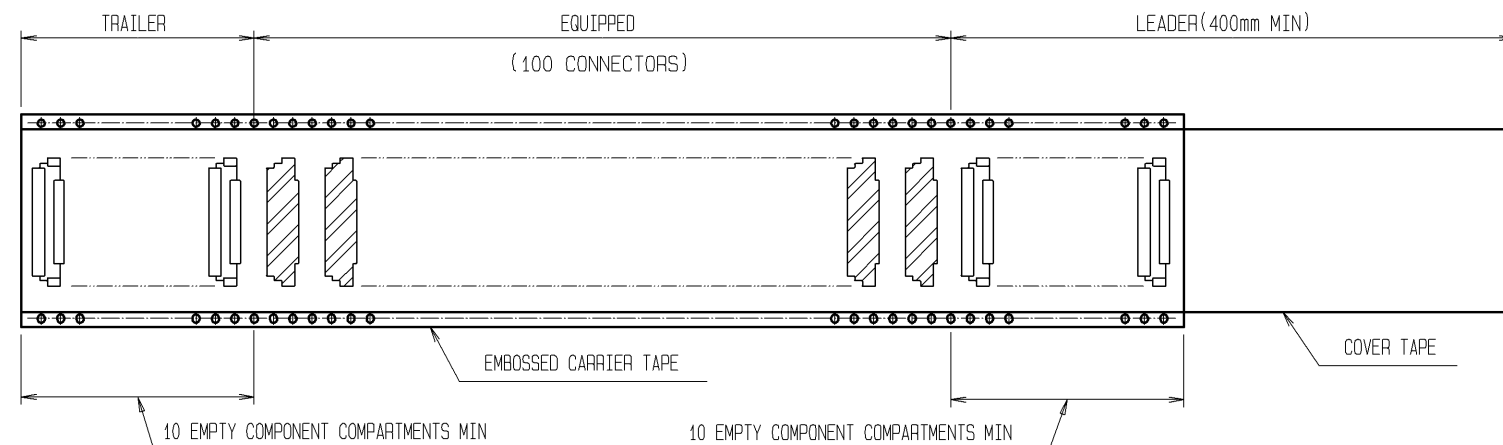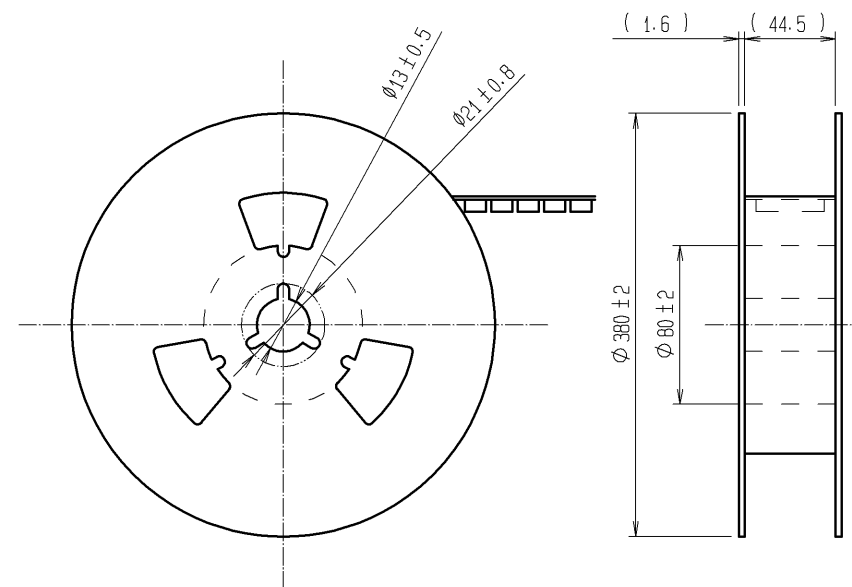

HRS

DRAWING NO.	EDC3-157339-02
PART NO.	FX16-21S-0.5SH(30)
CODE NO.	CL575-3411-5-30

2/2

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012