
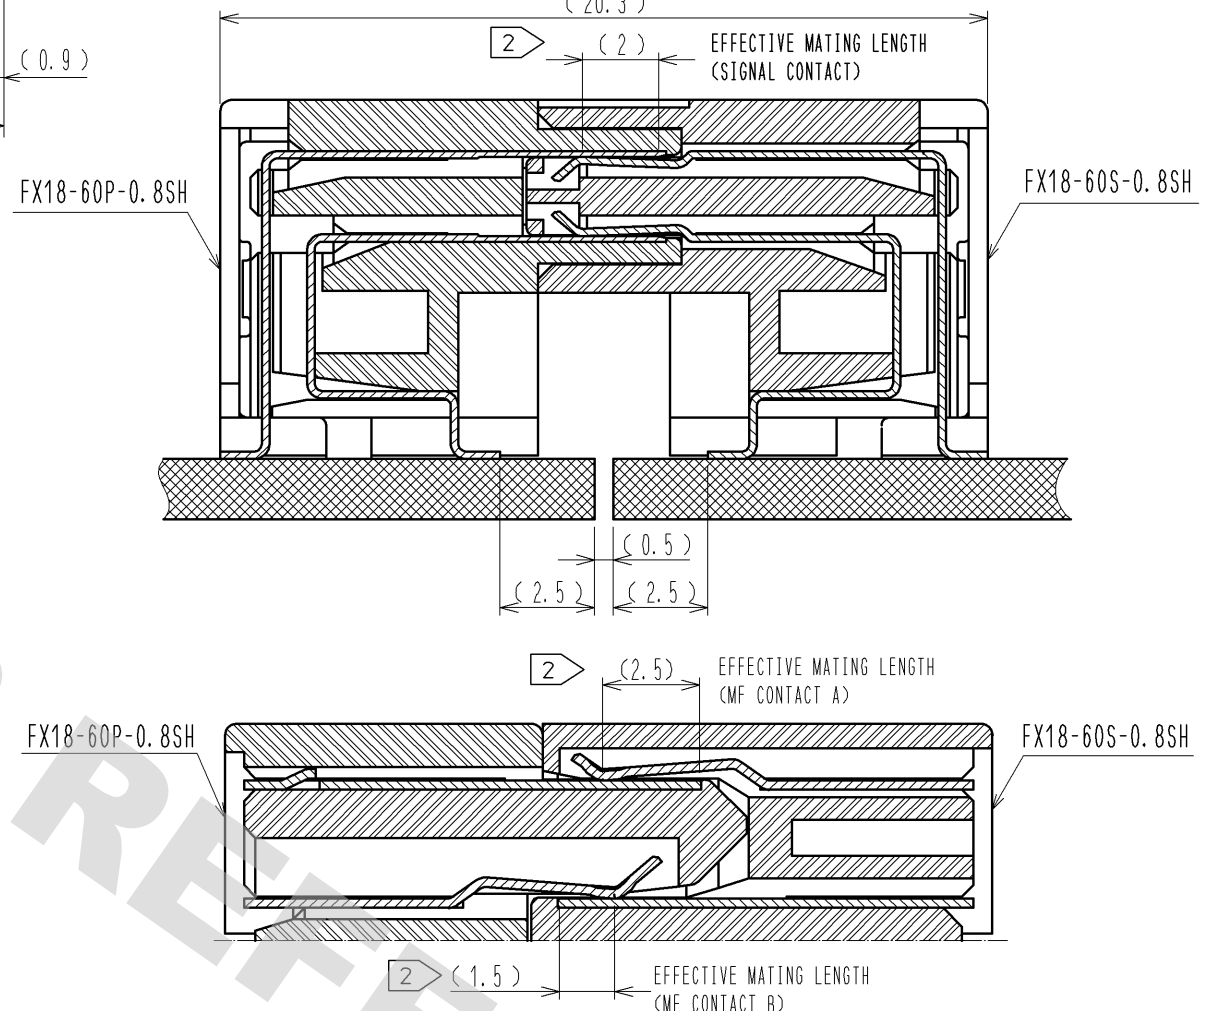
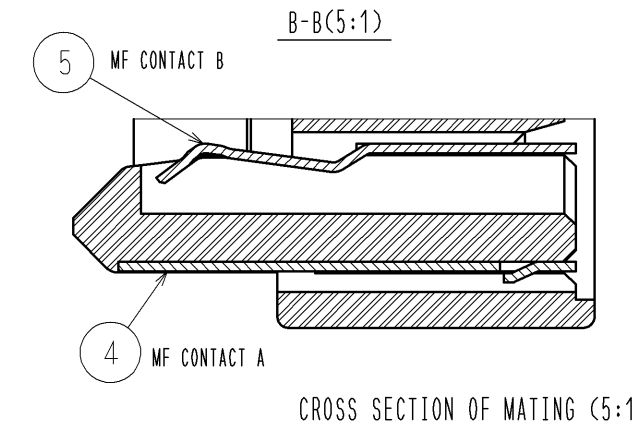
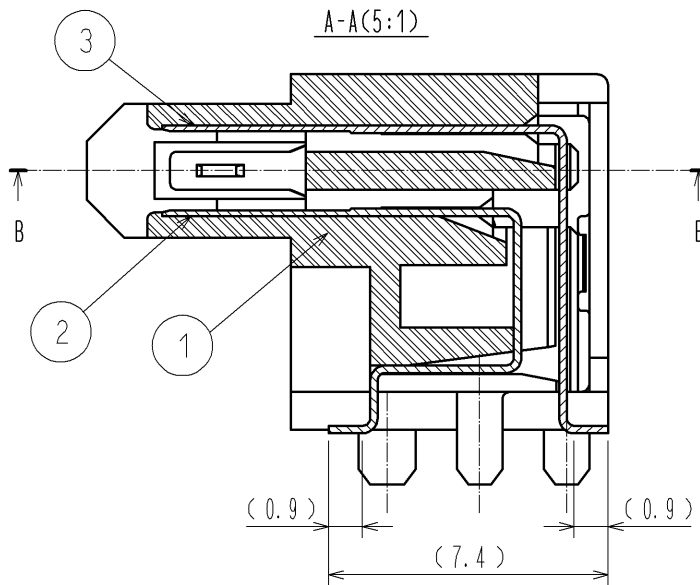


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012




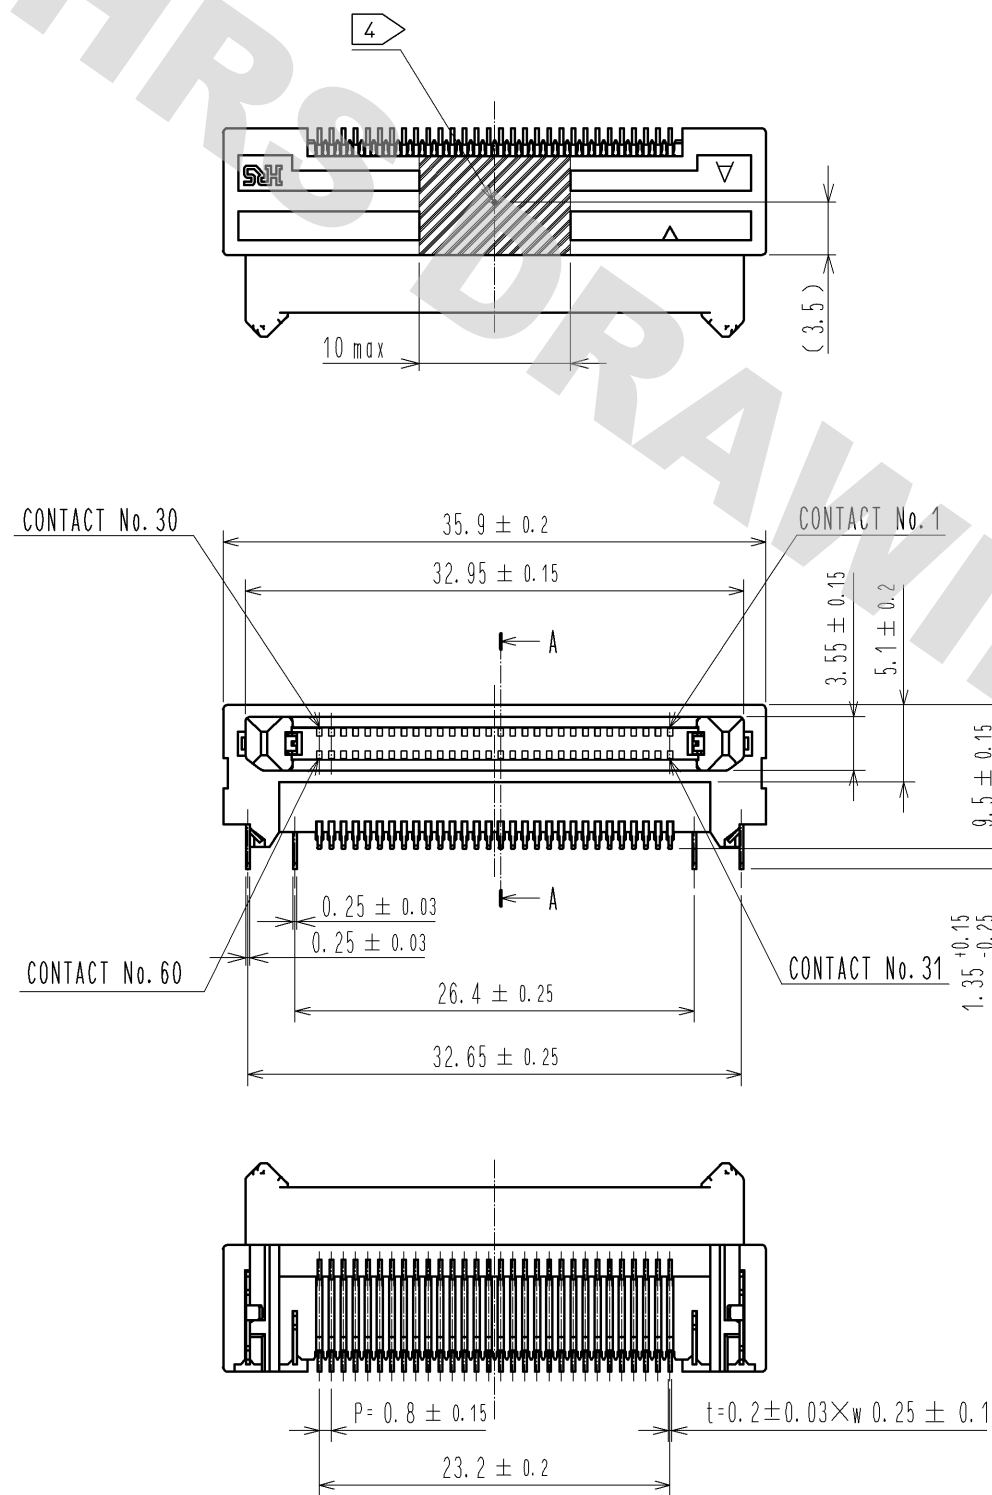


- NOTE 1 LEAD CO-PLANARITY IS 0.1mm MAX.
- 2 CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A->SIGNAL CONTACT->MF CONTACT B) WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.
- 3 MF CONTACT A AND MF CONTACT B CAN BE USED AS POWER SUPPLY CONTACT. (3A/PIN MAX)
- 4 IT SHOWS CONNECTOR'S CENTRE OF GRAVITY AND VACUUM PICKUP AREA.
- 5 PACKING FOR PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKING. (300pcs/RL)
- 6 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN' T AFFECT QUALITY LEVEL.
- 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCES.
- 8 SOLDERING LEAD OF MF CONTACT A SPLITS INTO TWO POLES. BE SURE TO CONNECT TO THE SAME CIRCUIT.

3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1µm	7	POLYESTER	(EMBOSSED COVER TAPE)
		LEAD AREA:GOLD 0.03µm	6	POLYSTYRENE	(EMBOSSED CARRIER TAPE)
		UNDER PLATING:NICKEL 1.3µm	5	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1µm
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1µm	4	PHOSPHOR BRONZE	LEAD AREA:TIN-PLATING 1µm
		LEAD AREA:GOLD 0.03µm			UNDER PLATING:NICKEL 1.3µm
1	POLYAMIDE	BLACK	3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1µm
		UL94V-0			LEAD AREA:TIN-PLATING 1µm
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 5	DESCRIPTION OF REVISIONS DIS-F-005578	DESIGNED TH. SANO
		APPROVED : HS. OKAWA	10.05.10	DRAWING NO.	EDC3-159075-02
		CHECKED : KI. HIROKAWA	10.05.10	PART NO.	FX18-60P-0.8SH(11)
		DESIGNED : TH. SANO	10.05.10	CODE NO.	CL579-0003-8-11
		DRAWN : KI. HIROKAWA	10.03.04		
		DATE	11.07.21		
		CHECKED	KI. HIROKAWA		
		DATE	11.07.21		


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

5 DRAWING FOR PACKING (2:1)

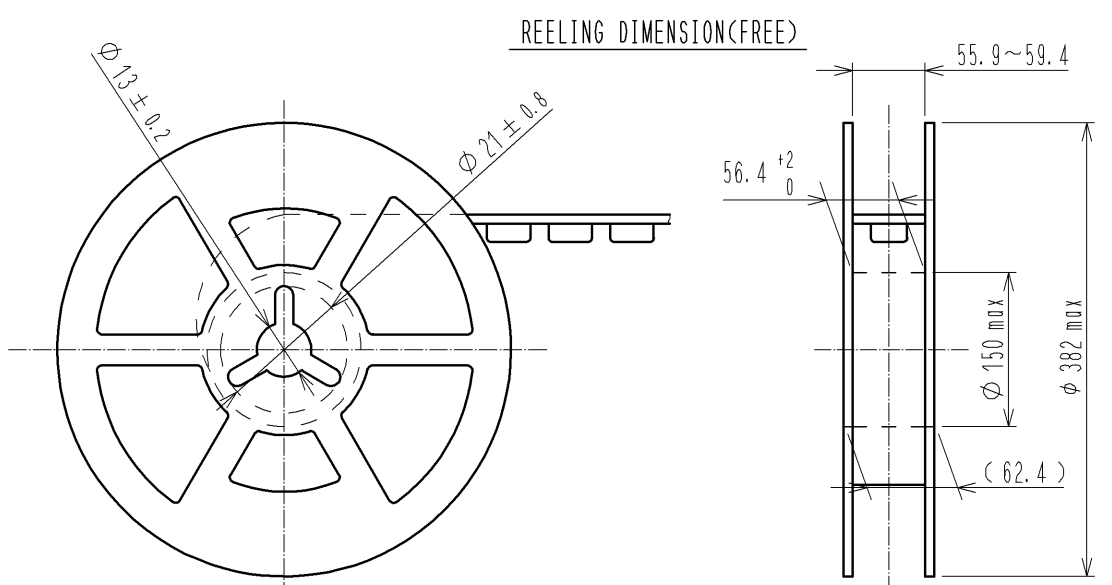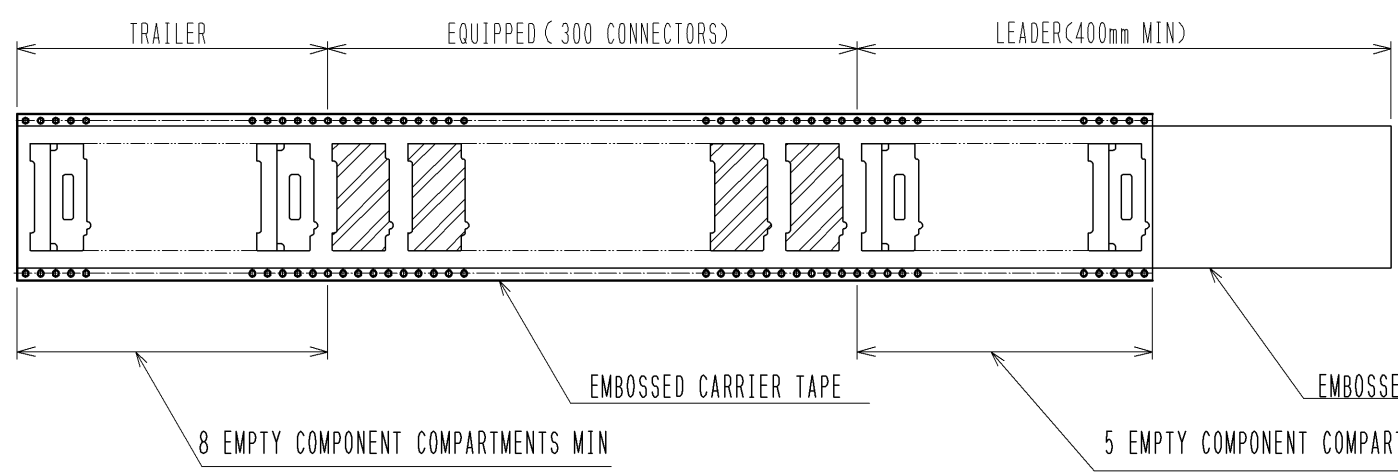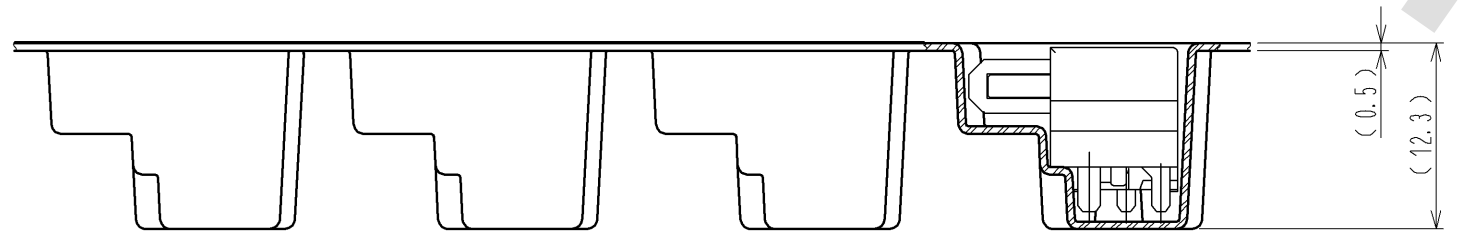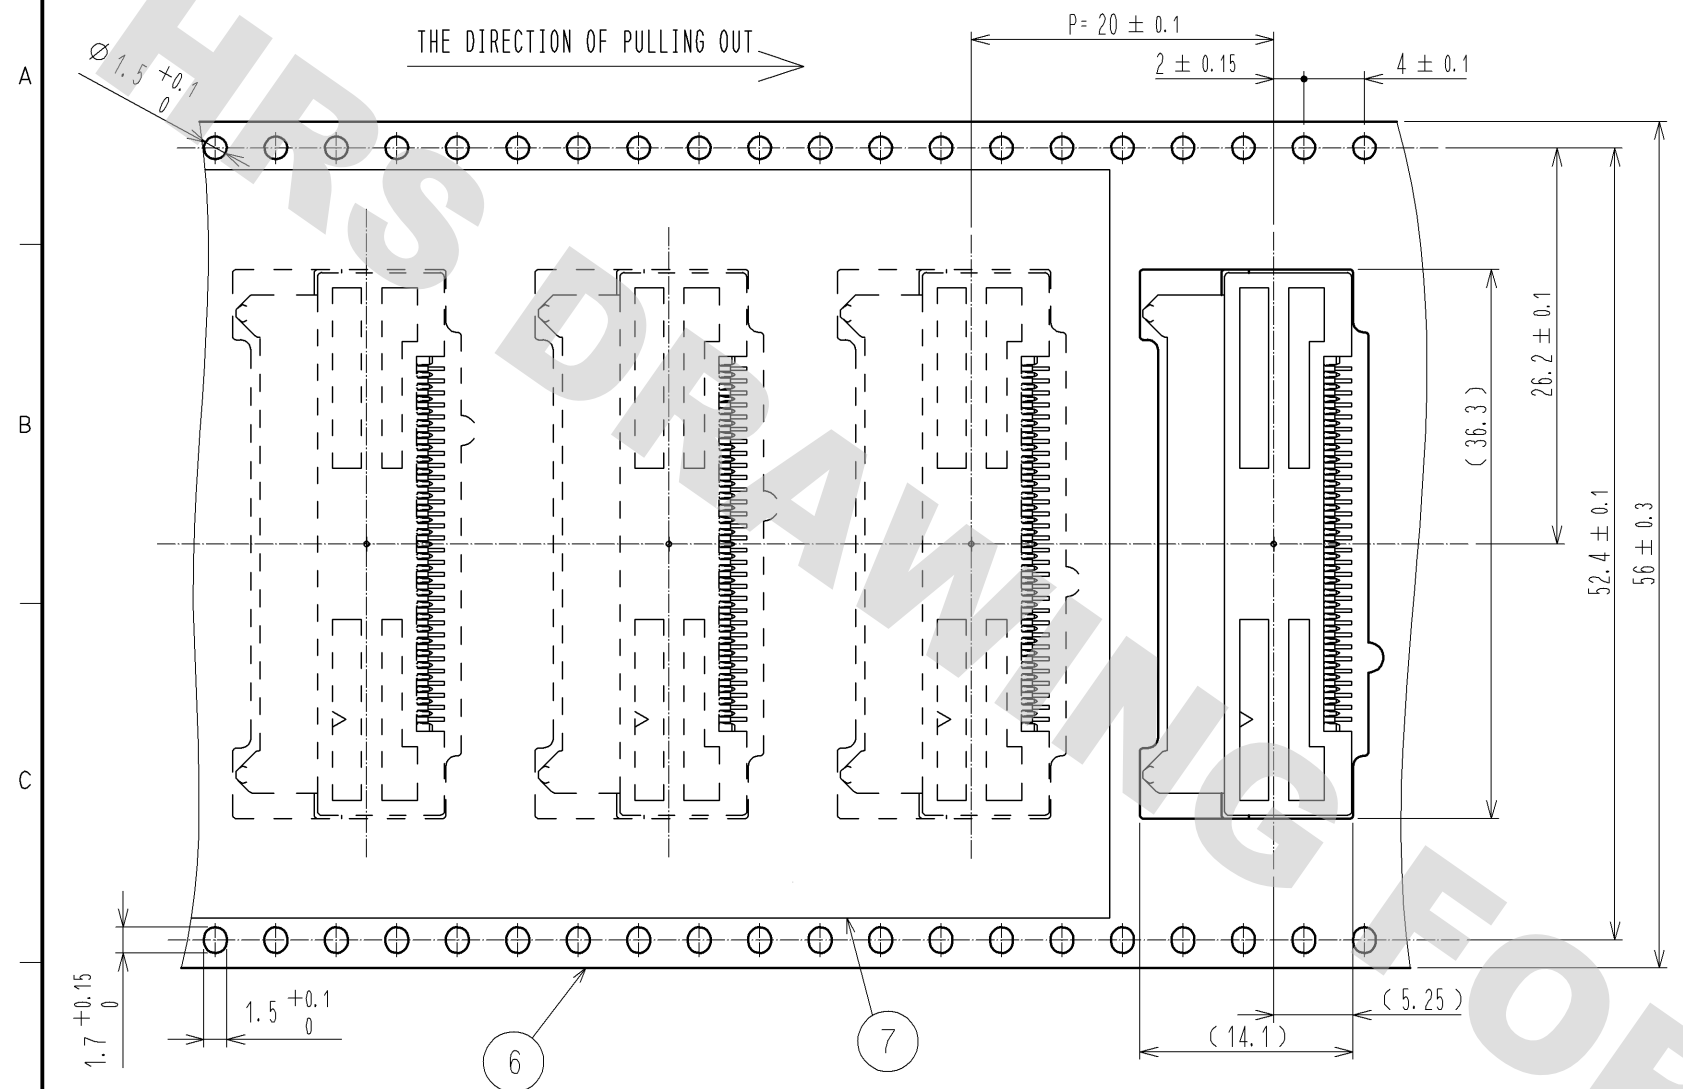


8 CONFIGURATION OF MF CONTACT A

CONTACT AREA OF MF CONTACT A



RECOMMENDED LAND PATTERN DIMENSION OF PCB(2:1)
(PCB THICKNESS: $t=1.6\text{mm}$ METAL MASK THICKNESS: $t=0.12\text{mm}$)

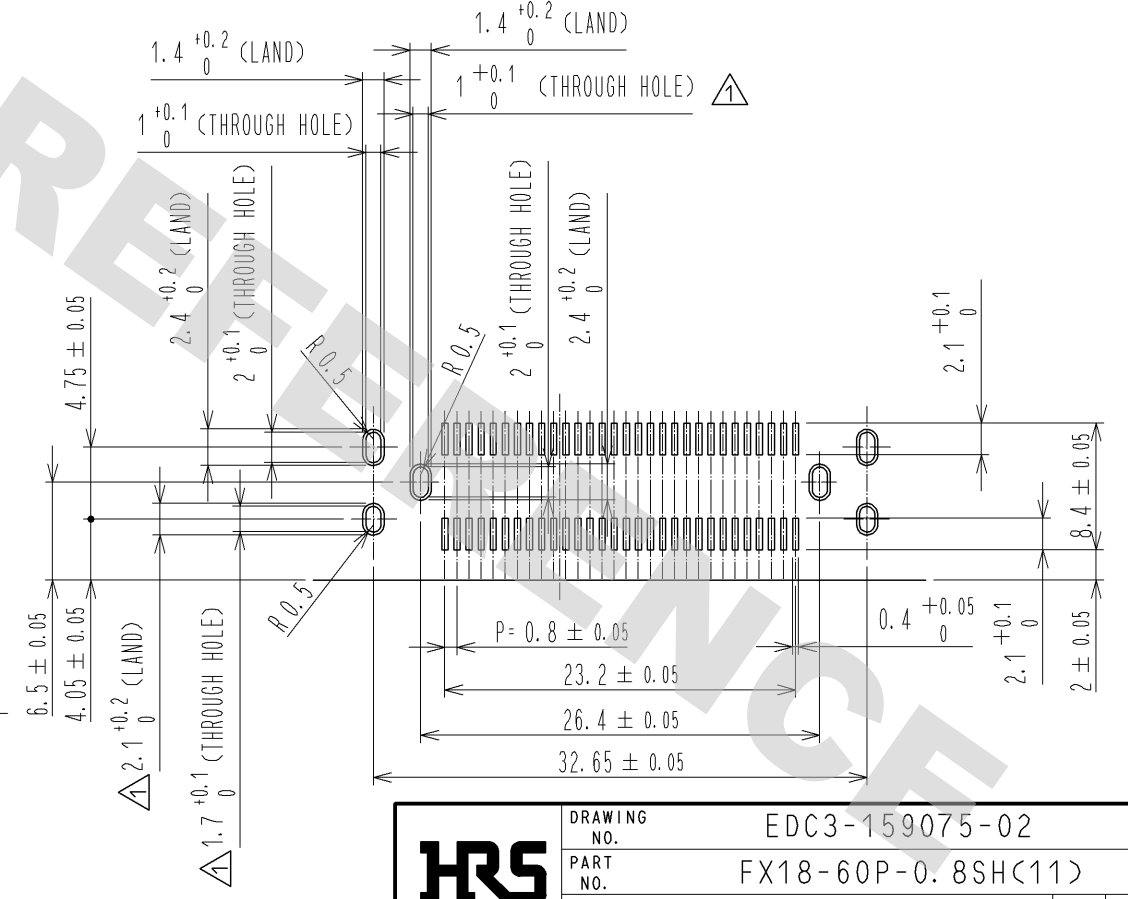

DRAWING NO.	EDC3-159075-02
PART NO.	FX18-60P-0.8SH(11)
CODE NO.	CL579-0003-8-11