


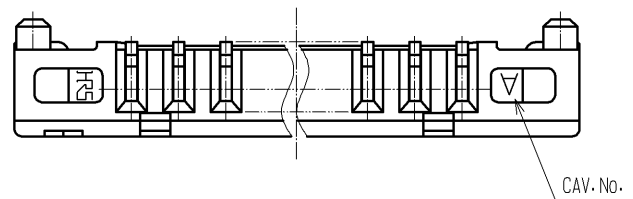
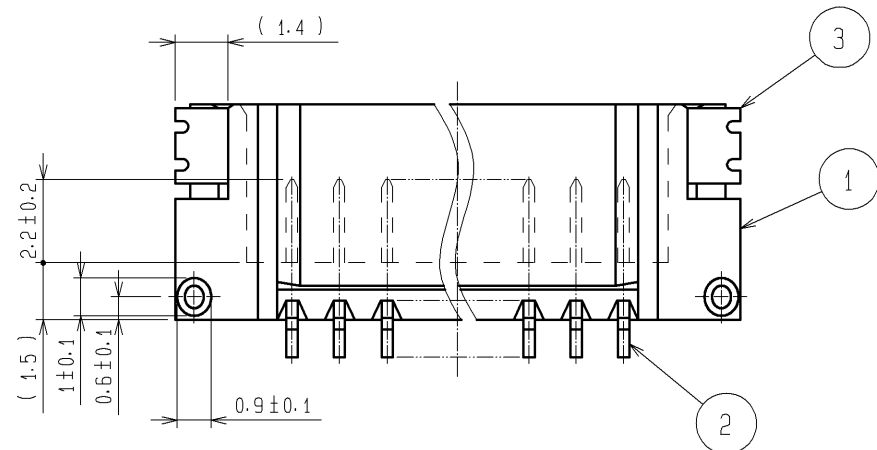
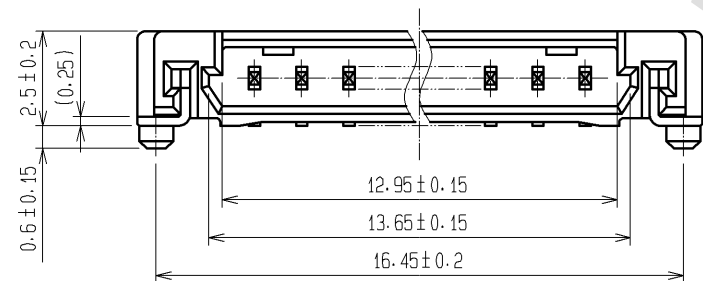



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

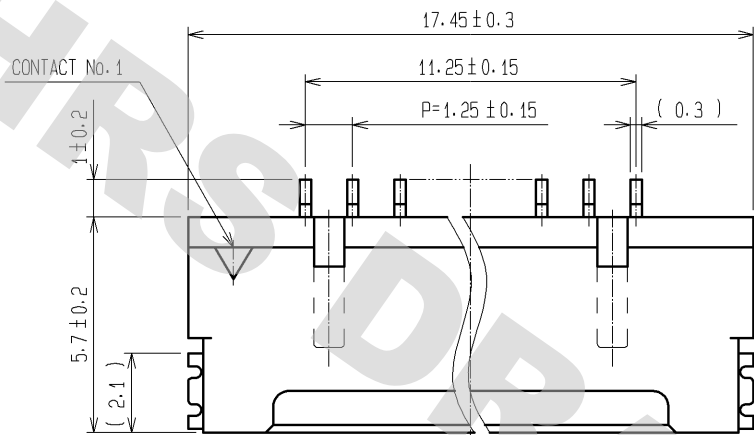

2 RECOMMENDED PATTERN

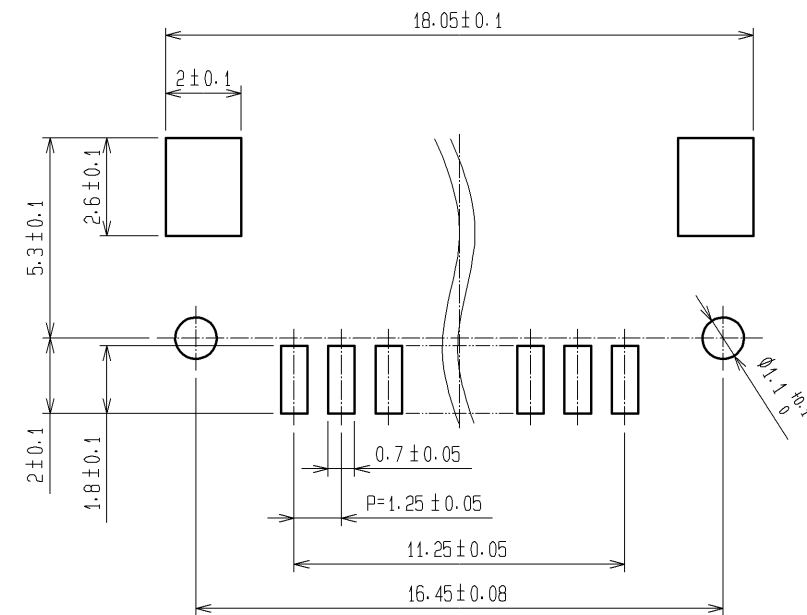

3 APPLICATION PATTERN

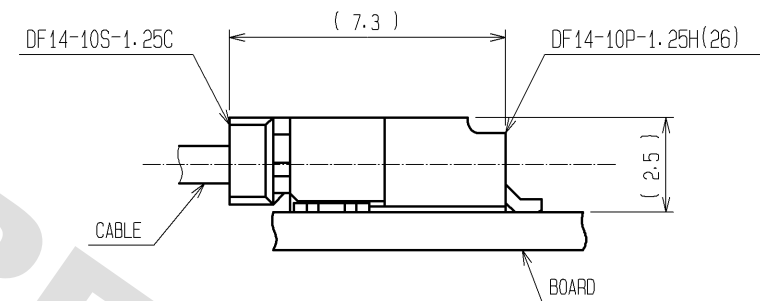

- NOTE 1. LEAD CO-PLANALITY INCLUDE REINFORCED METAL FITTING SHALL BE 0.1 MAX.
2 RECOMMENDED THICKNESS OF CREAM PASTE: 0.15~0.2mm.
RECOMMENDED APERTURE: 100%.
3 WHEN THIS CONNECTOR MATES WITH DF14-10S-1.25C, THE MATTING LENGTH IS 7.3mm.

3	PHOSPHOR BRONZE	TIN-COPPER PLATED 1μm min UNDER PLATING: NICKEL PLATED 0.5μm min			
2	BRASS	TIN-COPPER PLATED 1μm min UNDER PLATING: NICKEL PLATED 0.5μm min	5	POLYESTER	CLEAR (COVER TAPE)
1	POLYAMIDE	BEIGE, UL94V-0	4	A-PET	CLEAR (EMBOSSED CARRIER TAPE)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : TS. SAKATA	09.01.06	DRAWING NO.	EDC3-160339-01
		CHECKED : TS. KUMAZAWA	09.01.06	PART NO.	DF14-10P-1.25H(26)
		DESIGNED : SN. KOBAYASHI	09.01.06	CODE NO.	CL538-0029-6-26
		DRAWN : SN. KOBAYASHI	09.01.06		1/2

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

