
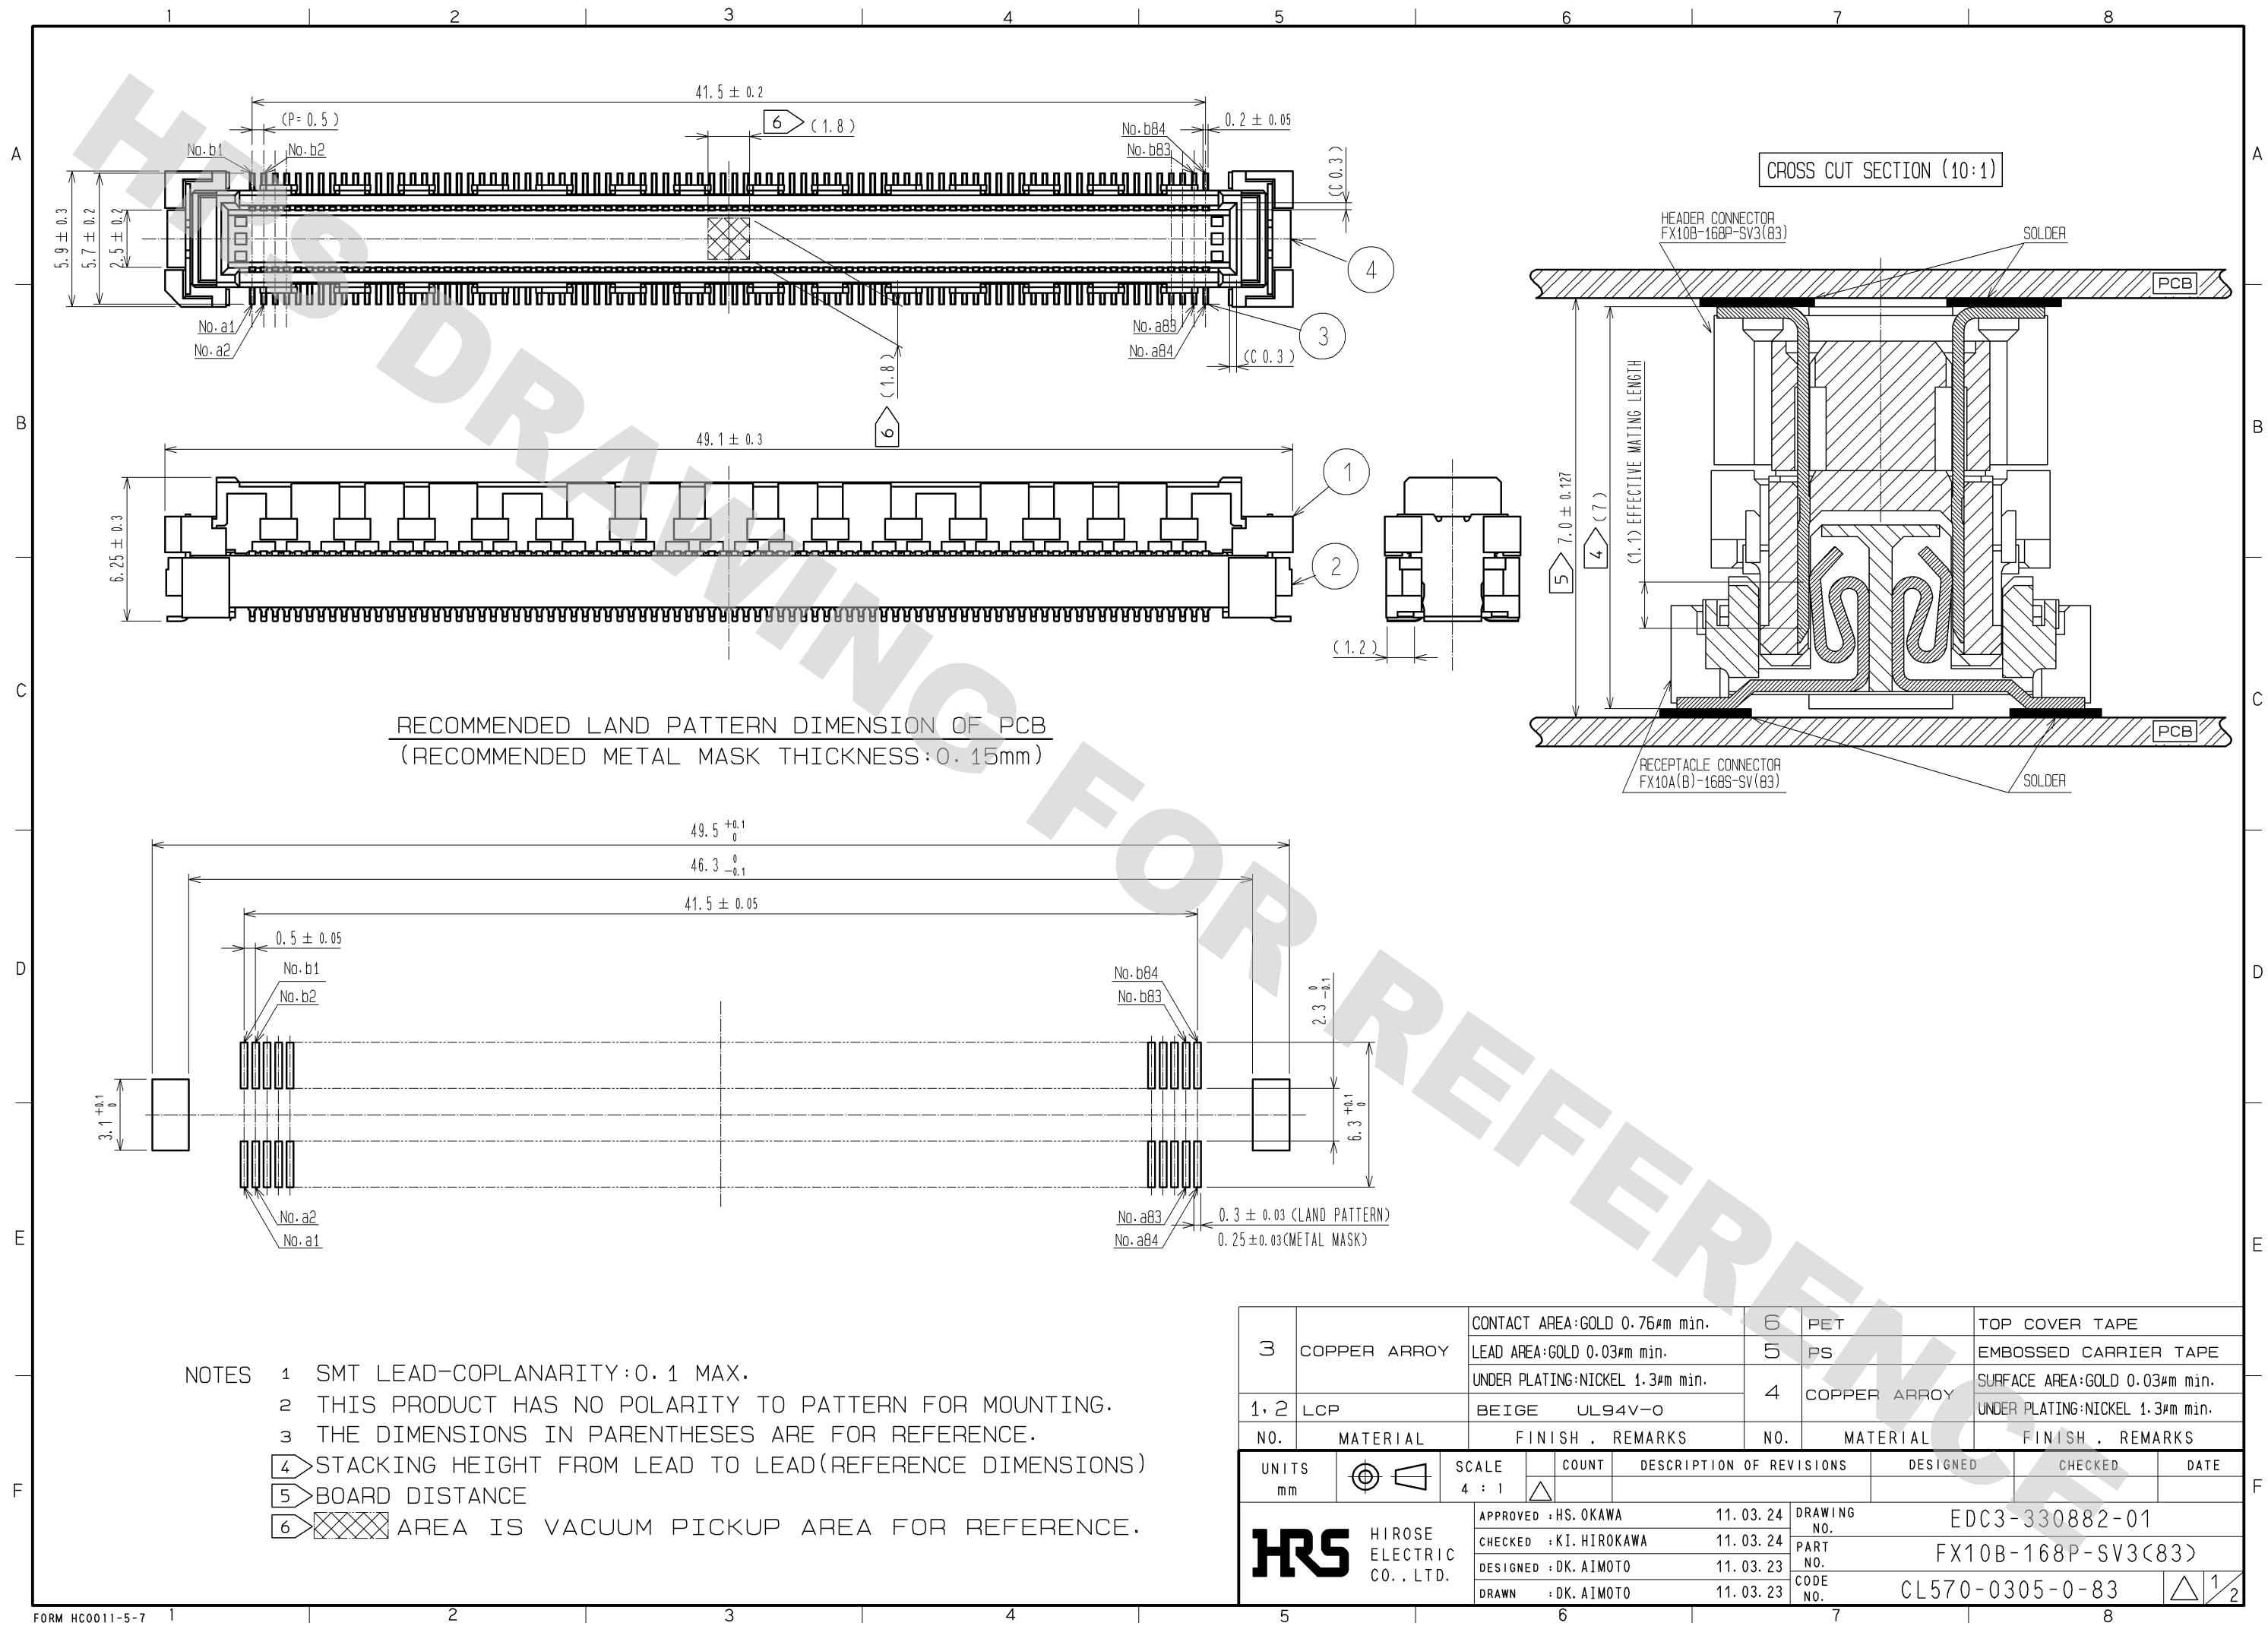


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012



- NOTES
- 1 SMT LEAD-COPLANARITY:0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 4 STACKING HEIGHT FROM LEAD TO LEAD(REFERENCE DIMENSIONS)
 - 5 BOARD DISTANCE
 - 6 AREA IS VACUUM PICKUP AREA FOR REFERENCE.

3	COPPER ARROY	CONTACT AREA:GOLD 0.76#m min.	6	PET	TOP COVER TAPE		
		LEAD AREA:GOLD 0.03#m min.	5	PS	EMBOSSD CARRIER TAPE		
		UNDER PLATING:NICKEL 1.3#m min.	4	COPPER ARROY	SURFACE AREA:GOLD 0.03#m min.		
1, 2	LCP	BEIGE UL94V-0			UNDER PLATING:NICKEL 1.3#m min.		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS	

UNITS mm			SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		11.03.24		DRAWING NO. EDC3-330882-01			
		CHECKED : KI. HIROKAWA		11.03.24		PART NO. FX10B-168P-SV3(83)			
		DESIGNED : DK. AIMOTO		11.03.23		CODE NO. CL570-0305-0-83			
		DRAWN : DK. AIMOTO		11.03.23		 1/2			

