

NOTES



- 1 SMT LEAD-COPLANARITY:0.1 MAX.
- 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
- 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
- 4  STACKING HEIGHT FROM LEAD TO LEAD(REFERENCE DIMENSIONS)
- 5  BOARD DISTANCE
- 6  AREA IS VACUUM PICKUP AREA FOR REFERENCE.

3	COPPER ARROY	CONTACT AREA:GOLD 0.76#m min.		5	PS		
		LEAD AREA:GOLD 0.03#m min.					
		UNDER PLATING:NICKEL 1.3#m min.					
1, 2	LCP	BEIGE UL94V-0		4	COPPER ARROY	SURFACE AREA:GOLD 0.03#m min.	
						UNDER PLATING:NICKEL 1.3#m min.	
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE	
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	11. 03. 24	DRAWING NO.	EDC3-330884-02				
		CHECKED : KI. HIROKAWA	11. 03. 24	PART NO.	FX10B-168P-SV4(93)				
		DESIGNED : DK. AIMOTO	11. 03. 23	CODE NO.	CL570-0307-5-93				
		DRAWN : DK. AIMOTO	11. 03. 23						1/2

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

DRAWING FOR PACKING(2:1)

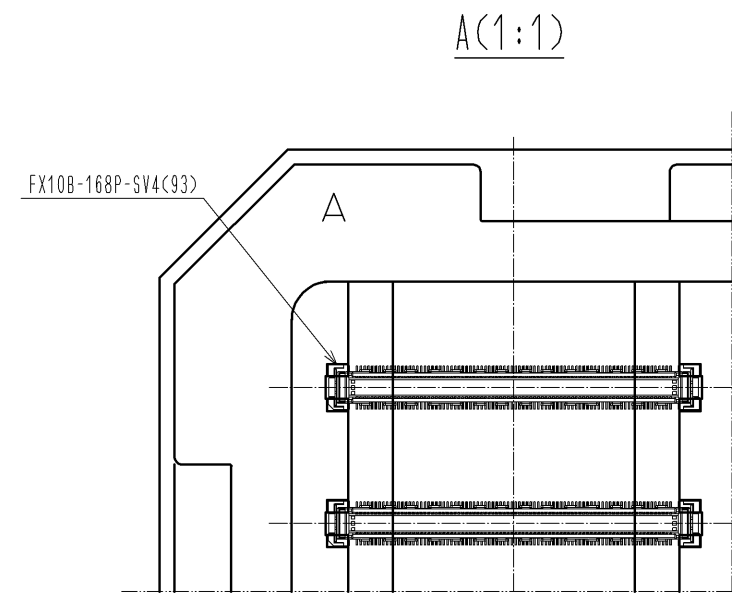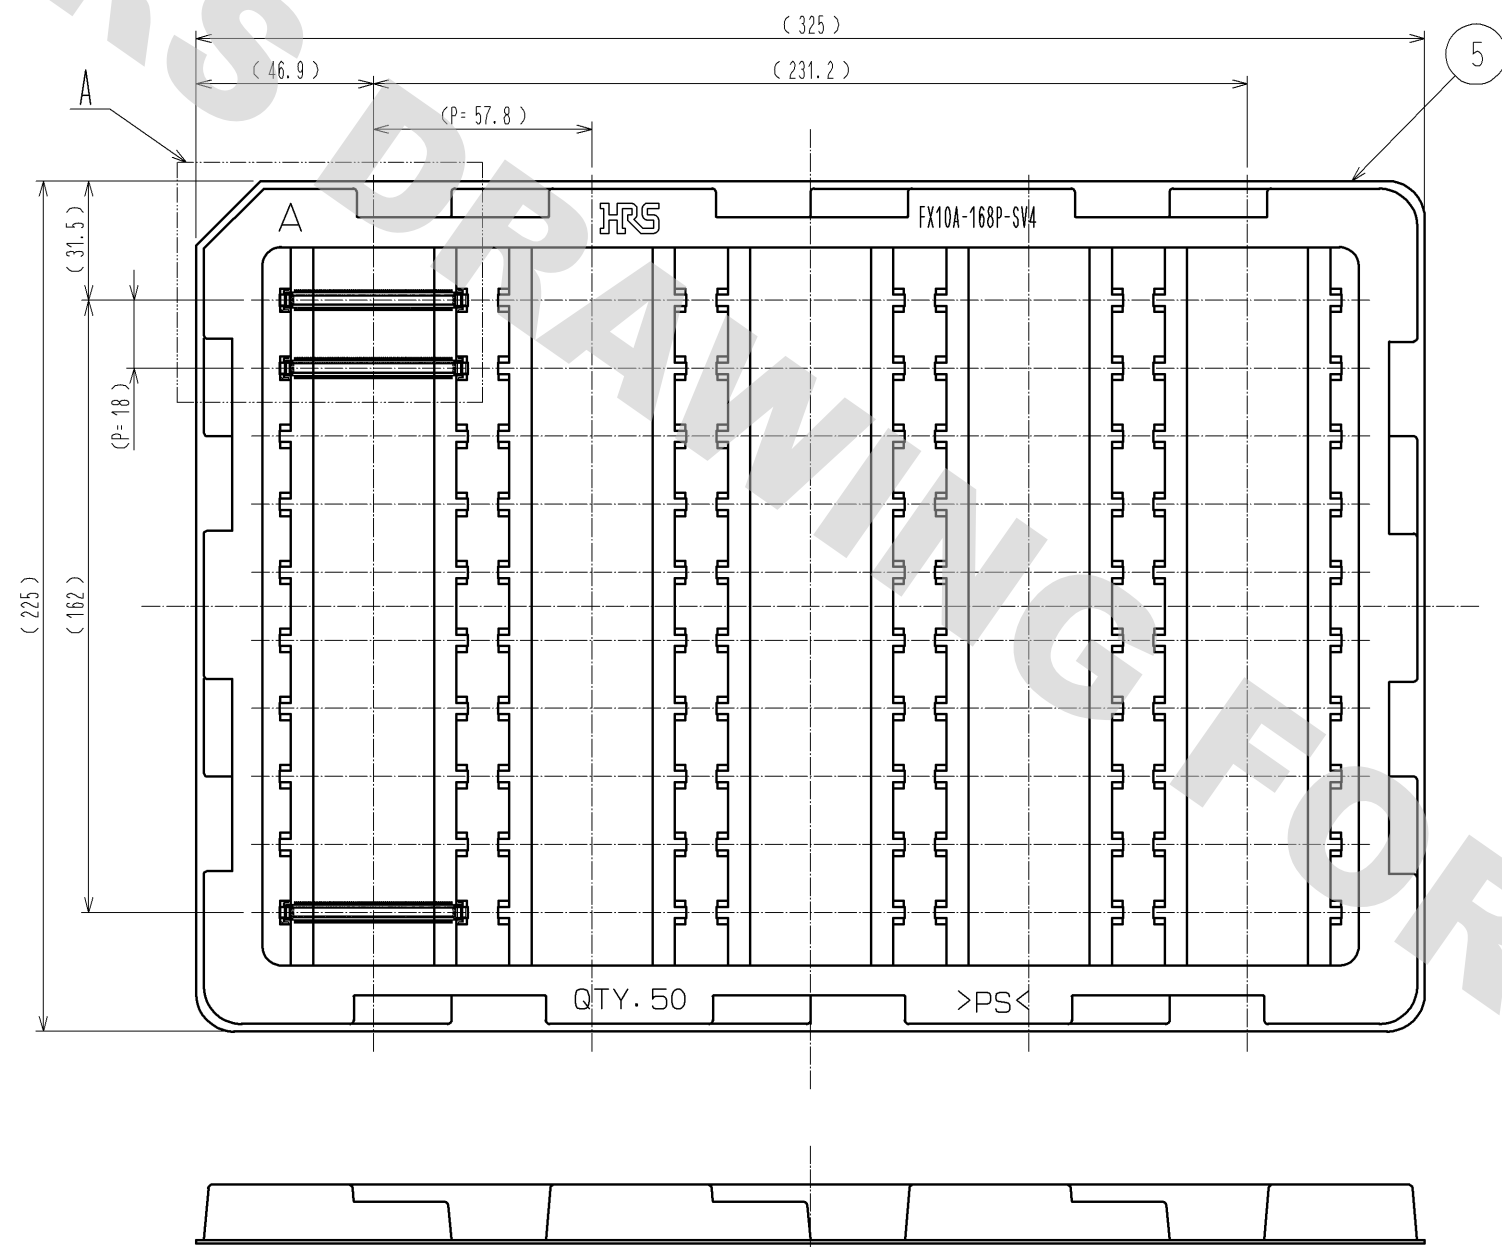

- NOTES
- 1 1TRAY:50 CONNECTORS.
 - 2 THIS PRODUCT HAS NO POLARITY TO TRAY PACKAGING.
 - 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.



DRAWING NO.	EDC3-330884-02
PART NO.	FX10B-168P-SV4(93)
CODE NO.	CL570-0307-5-93

2/2