



DRAWING FOR REFERENCE: This is subject to change without notice  
08/11/2012

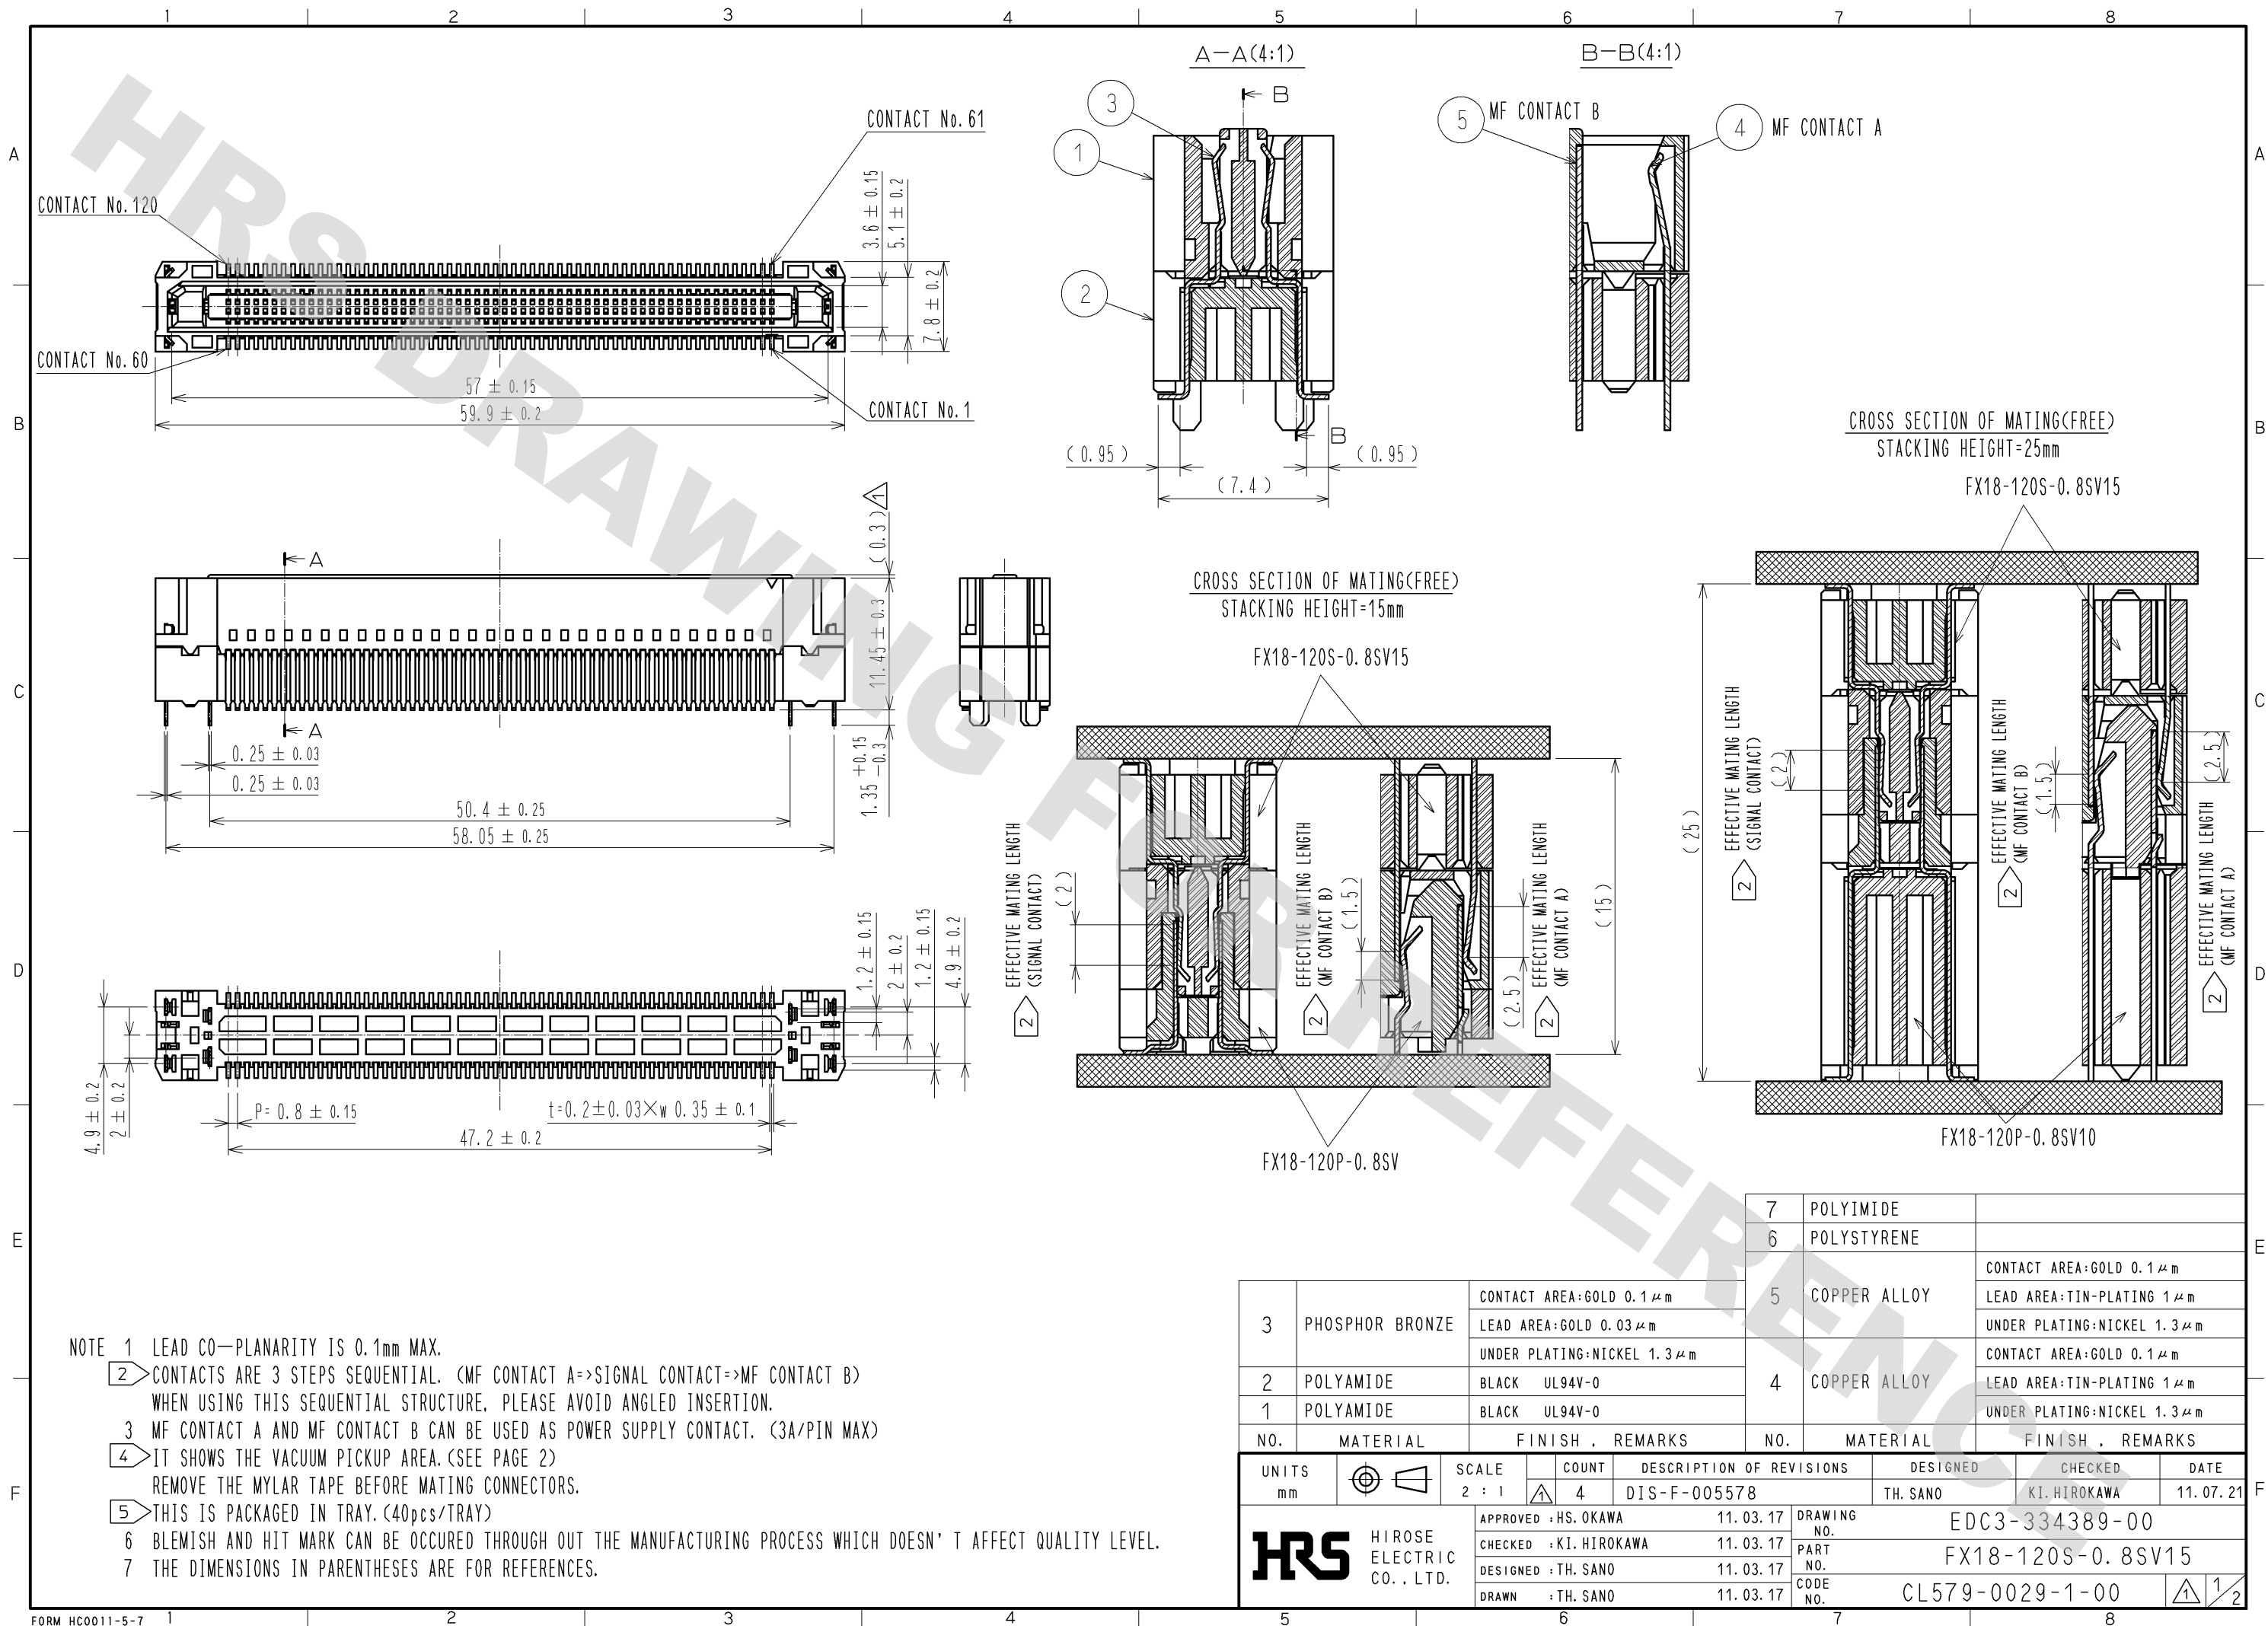


NOTE 1 LEAD CO—PLANARITY IS 0.1mm MAX.  
2 CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A=>SIGNAL CONTACT=>MF CONTACT B)  
WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.  
3 MF CONTACT A AND MF CONTACT B CAN BE USED AS POWER SUPPLY CONTACT. (3A/PIN MAX)  
4 IT SHOWS THE VACUUM PICKUP AREA. (SEE PAGE 2)  
REMOVE THE MYLAR TAPE BEFORE MATING CONNECTORS.  
5 THIS IS PACKAGED IN TRAY. (40pcs/TRAY)  
6 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN' T AFFECT QUALITY LEVEL.  
7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCES.

DRAWING FOR REFERENCE: This is subject to change without notice  
08/11/2012


RECOMMENDED LAND PATTERN DIMENSION OF PCB(2:1)  
(PCB THICKNESS:t=1.6mm METAL MASK THICKNESS:t=0.12mm)

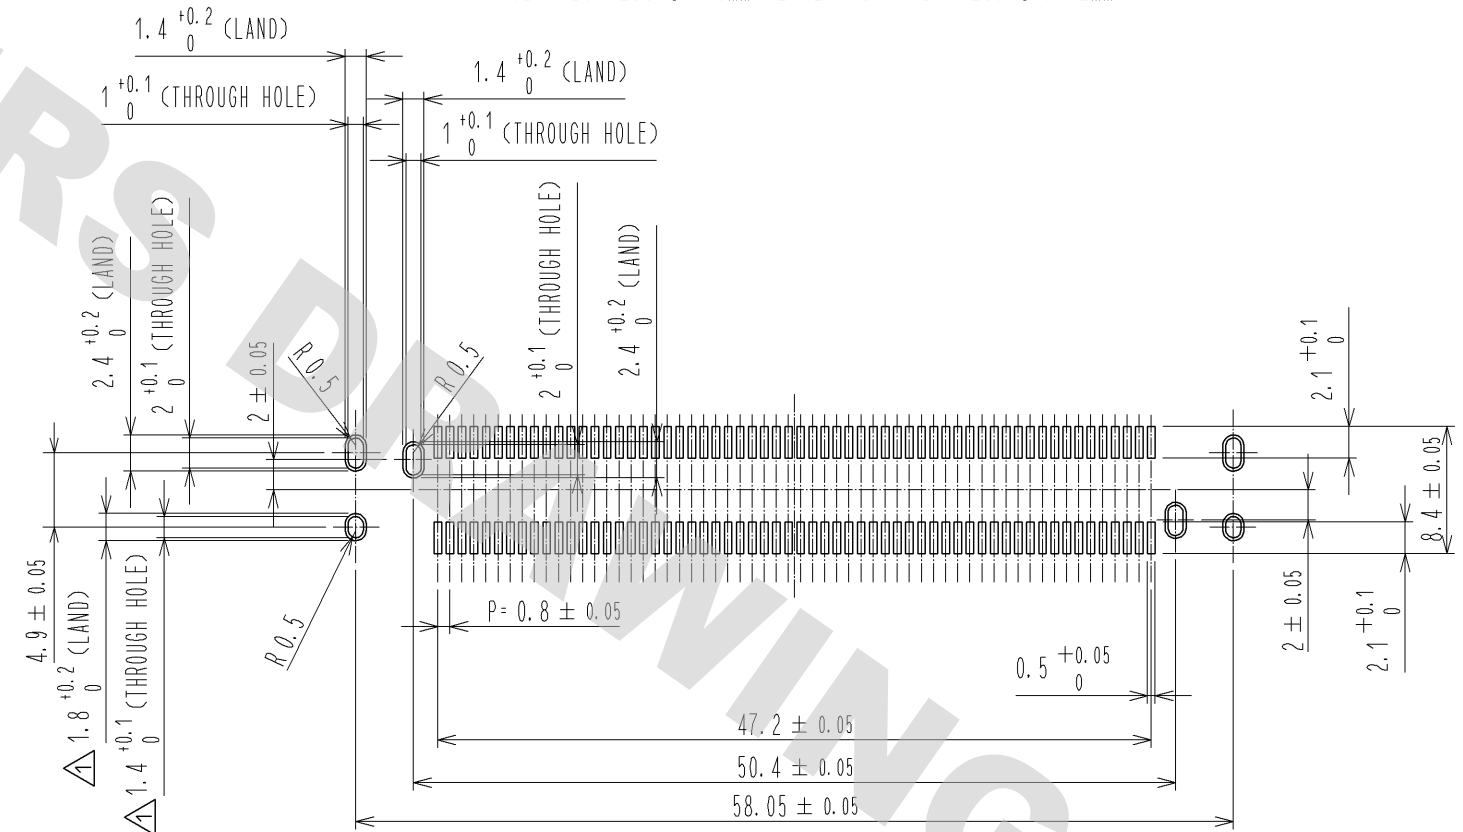


5 DRAWING FOR PACKING(1:2)

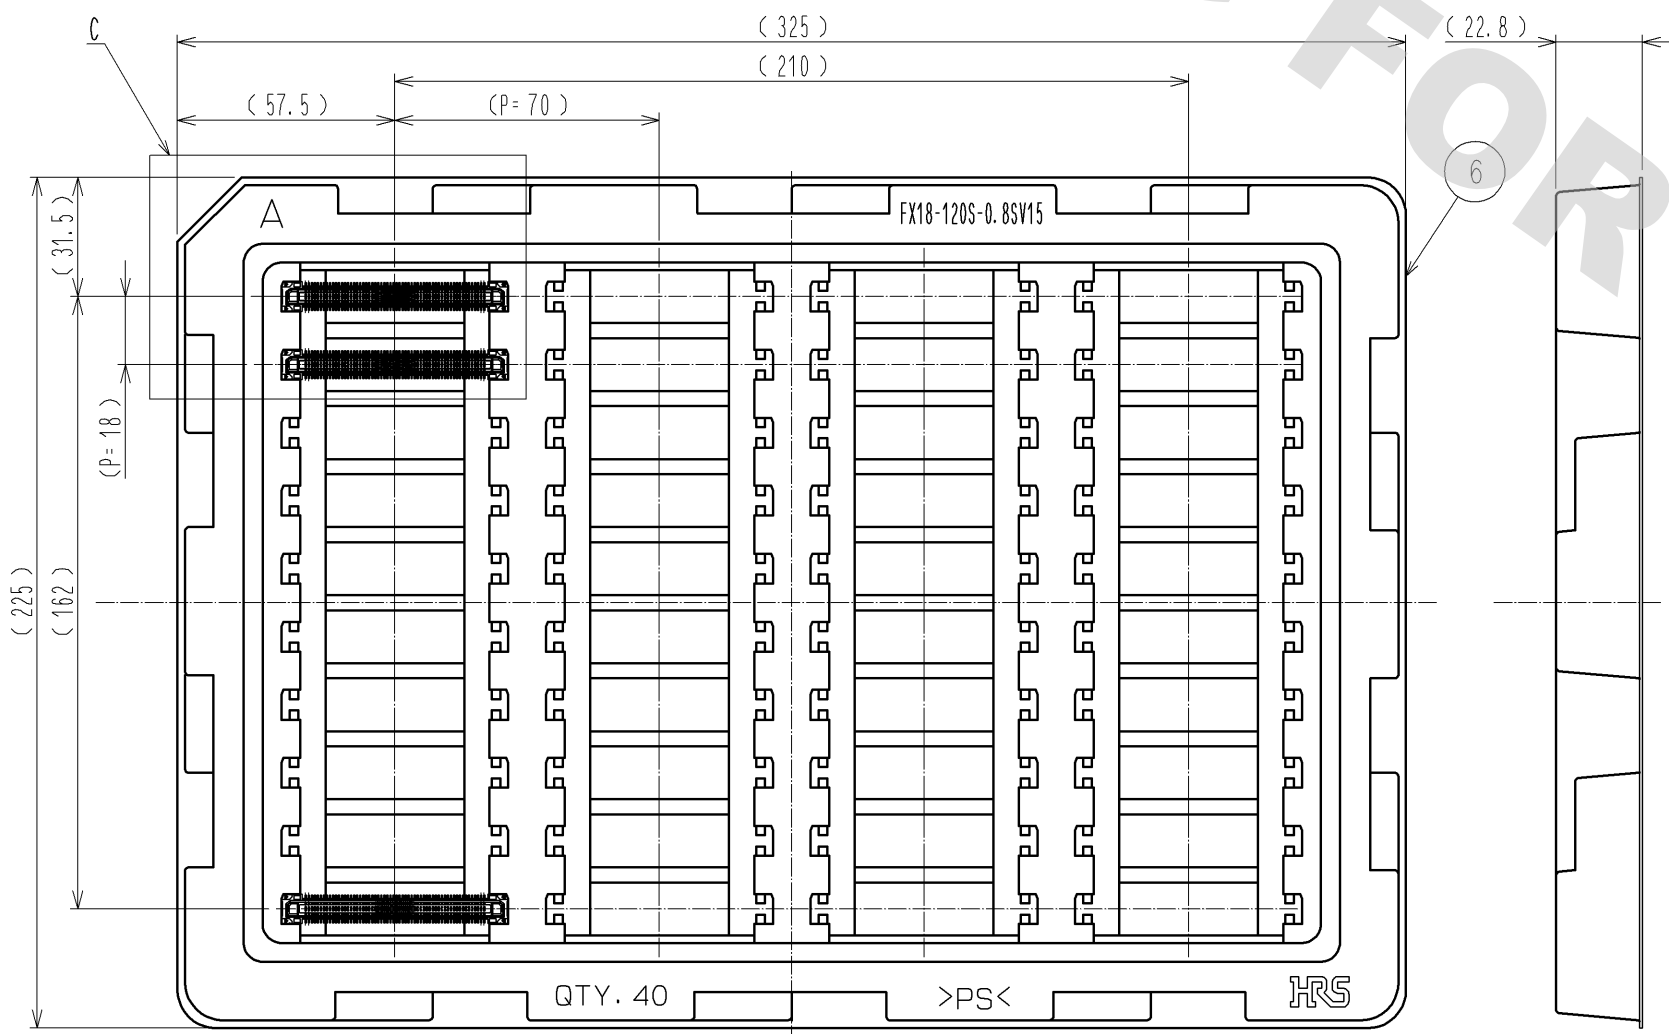

8 CONFIGURATION OF MF CONTACT A

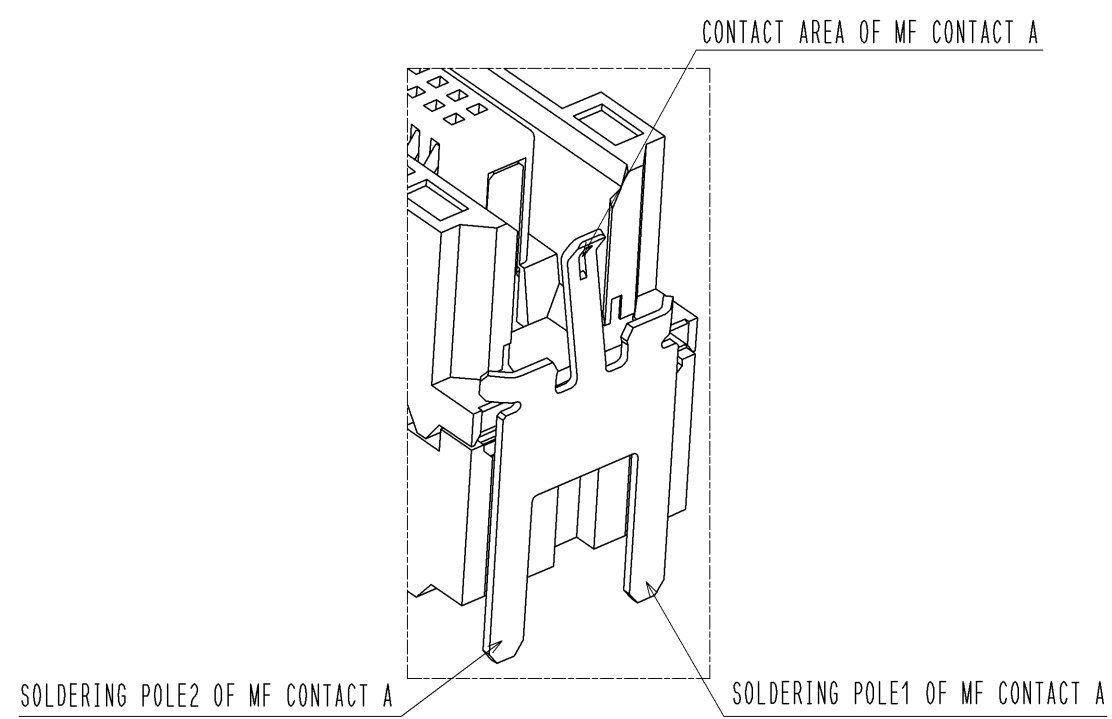

NOTE 8 SOLDERING LEAD OF MF CONTACT A SPLITS INTO TWO POLES.  
BE SURE TO CONNECT TO THE SAME CIRCUIT.

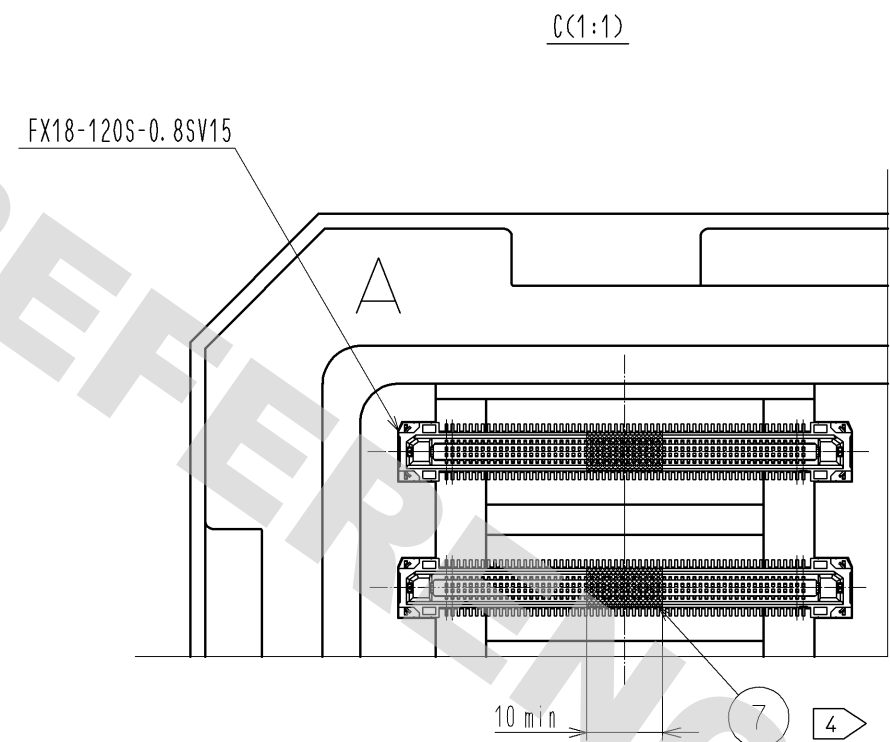

|     |             |                   |
|-----|-------------|-------------------|
| HRS | DRAWING NO. | EDC3-334389-00    |
|     | PART NO.    | FX18-120S-0.8SV15 |
|     | CODE NO.    | CL579-0029-1-00   |
|     |             | 1 2 2             |