


(1,27 mm) .050"

SHF, ESHF, EHF, ECF SERIES

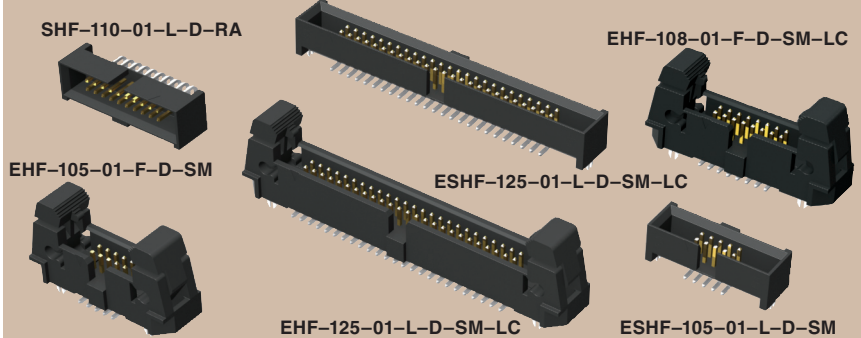

SHROUDED & EJECTOR IDC HEADER

SHF, ESHF Mates with:
FFSD, FFTP (SHF)

EHF Mates with:
FFSD*, FFTP

SPECIFICATIONS

For complete specifications
see www.samtec.com?SHF,
www.samtec.com?ESHF or
www.samtec.com?EHF

Insulator Material:
Black Liquid Crystal Polymer
Terminal Material:
Phosphor Bronze

Plating:
Sn or Au over
50µ" (1,27 µm) Ni
Operating Temp Range:
-55°C to +125°C
RoHS Compliant:
Yes

Processing:
Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
(0,10 mm) .004" max

RECOGNITIONS


For complete scope of
recognitions see
www.samtec.com/quality



ALSO AVAILABLE (MOQ Required)

- Other sizes
Contact Samtec.



EJECTOR HEADER CAP (Locks FFSD cable to EHF header)



ECF	NO. PINS PER ROW
	05, 08, 10, 13, 17, 20, 25

***Important Note:**
EHF will not mate to FFSD
with strain relief (-SR option),
see ESHF series.

Note: Some lengths, styles
and options are non-standard,
non-returnable.

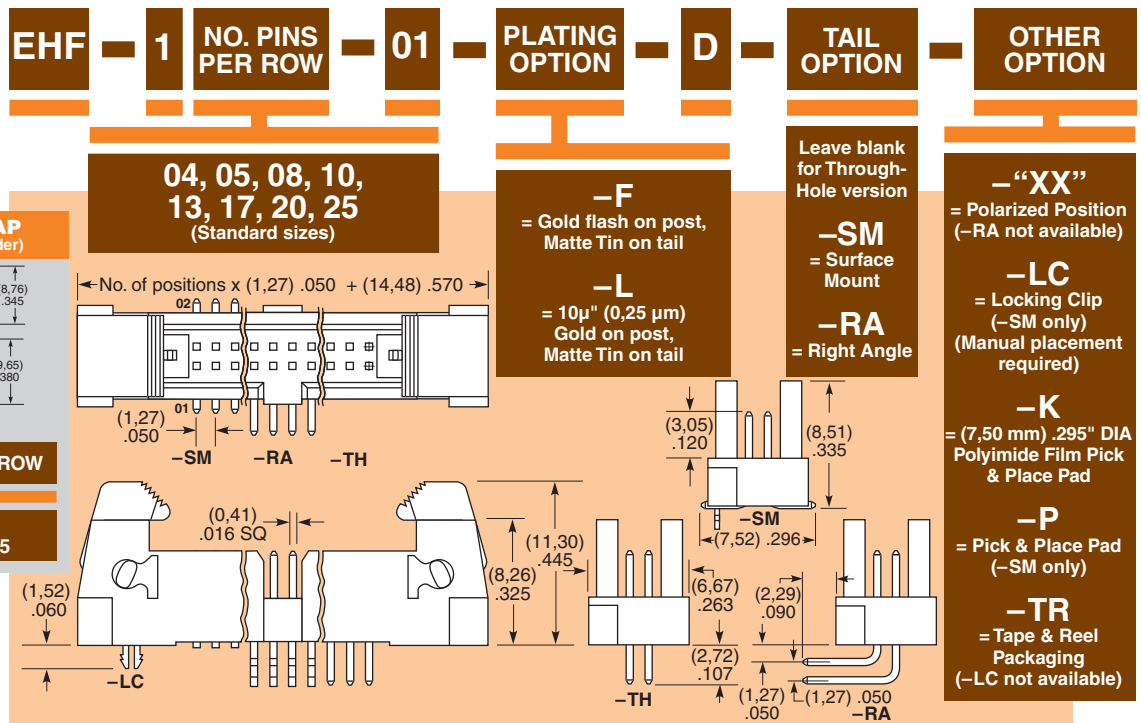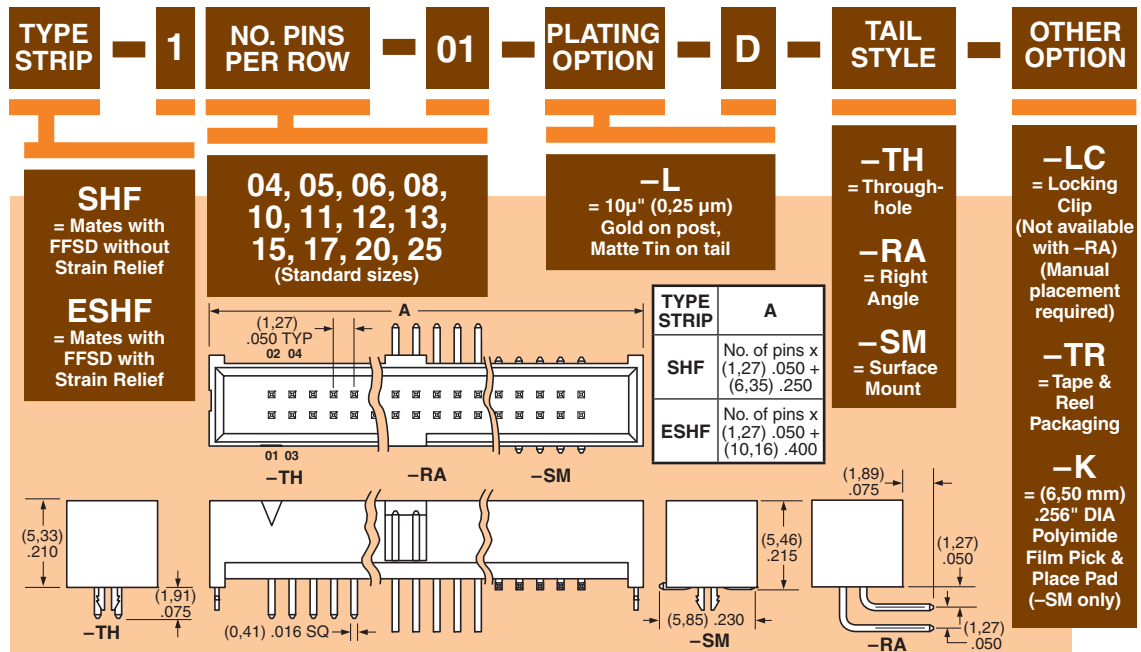

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM