

ECONOIRON[®] MODEL EI-20K



Quick Jump:

Econolron Model EI -20 K


Entry-level, consumer quality butanepowered soldering/heat tool kit

- Kit contains unit, solder tip, heat tip, torch tip, hot knife tip, coil of 60/40 solder, sponge and tool rest packed in rugged plastic case
- Completely portable, lightweight and easy to handle
- Economically priced
- Temperatures up to 2370°F/1300°C
- Started with flint lighter built in the cap
- Use to pinpoint heat, silver solder, solder and desolder, shrink heat shrink tubing, strip insulation with hot knife, torch material and more



ORDERING INFORMATION

| MODEL NO. | DESCRIPTION |
|-----------|---|
| EI -20K | Economical, self -igniting, refillable, butane gas powered soldering iron/torch/heat tool kit. Boxed. |

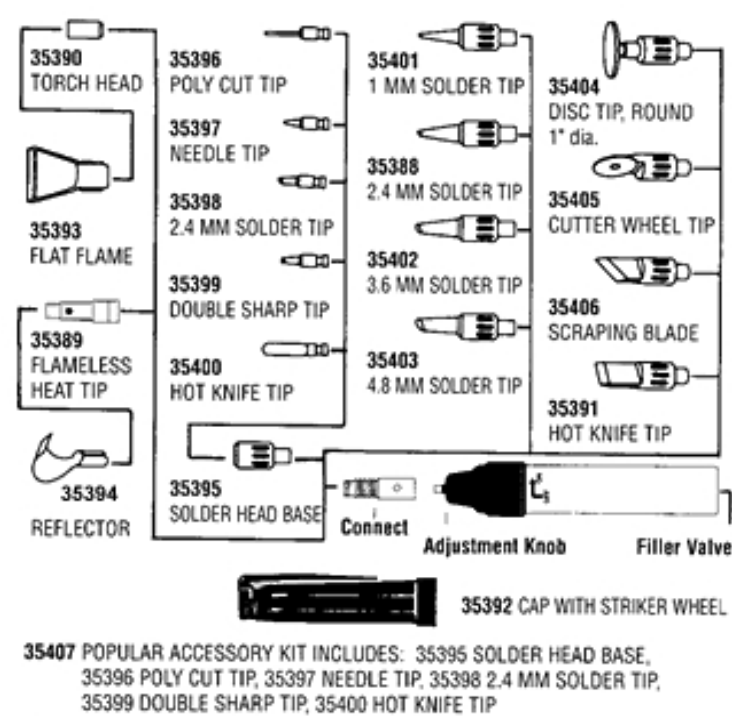

OPTIONAL ACCESSORIES

| PART NO. | DESCRIPTION | PART NO. | DESCRIPTION |
|----------|-------------------------------------|----------|--------------------------------|
| 35388 | 2.4 mm Solder Tip - Std EI -20 | 35398 | 2.4 mm Solder Tip - Base req'd |
| 35389 | Flameless Heat Tip - Std EI -20 | 35399 | Double Sharp Tip - Base req'd |
| 35390 | Torch Head - Std EI -20 | 35400 | Hot Knife Tip - Base req'd |
| 35391 | Hot Knife Tip - Std EI -20K | 35401 | 1 mm Solder Tip |
| 35392 | Cap with Stiker Wheel - Std EI -20K | 35402 | 3.6 mm Solder Tip |
| 35393 | Flat Flame | 35403 | 4.8 mm Solder Tip |
| 35394 | Reflector | 35404 | Disc Tip, Round 1" dia. |
| 35395 | Solder Head Base | 35405 | Cutter Wheel Tip |
| 35396 | Poly Cut tip - Base req'd | 35406 | Scraping Blade |
| 35397 | Needle Tip - Base req'd | 35407 | Popular Accessory Kit |

SPECIFICATIONS

| | |
|---|--|
| ■ Dimensions: 6.5" L (16.6 cm) w/o cap | ■ Equivalent to Electric Iron: 10 to 60 Watt |
| ■ Recommended Fuel: Master Ultratane [®] Butane | ■ Gas Tank Capacity: .6 fl. oz. (.01 L) |
| ■ Approx. Operating Time: 60 min. | ■ Net Weight: 1.9 oz. (54 g) |
| ■ Approx. Heat Tip Temp.: 780° F (420° C) | ■ Shipping Weight: 1 lb. |
| ■ Approx. Torch Tip Temp.: 2370° F (1300° C) | ■ Shipped Empty |
| ■ Approx. Solder Tip Temp.: 395° F to 780° F (200° C to 420° C) | |



ULTRATANE[®] BUTANE

Use Master Ultratane Butane for best performance. The only approved butane recommended to fuel all Master butane powered products.

Users should independently evaluate the suitability of the product for their application.

WARNING

The Department of Transportation Hazardous Material Regulations forbid carriage of butane or other flammable gas products on passenger aircraft. Do not pack this item or any other flammable gas item in any checked or carry -on baggage.