


REV	ECN	APP'D
-	3600	JEC 12/11/98
A	4686	IQ 1/2/02
B	5137	

## ELFK SERIES PART NUMBERING SCHEME

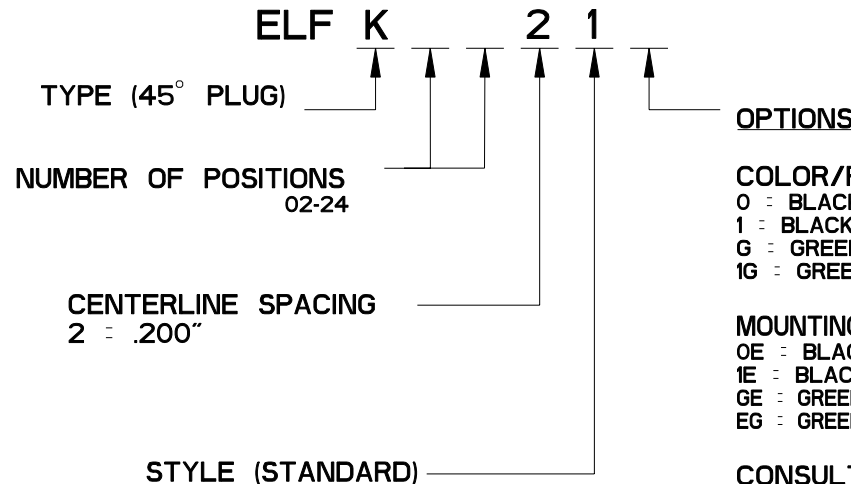

**OPTIONS**

**COLOR/PLATING**


- 0 = BLACK, TIN-LEAD (STANDARD)
- 1 = BLACK, SELECTIVE GOLD
- G = GREEN, TIN-LEAD
- 1G = GREEN, SEL. GOLD

**MOUNTING EARS**


- OE = BLACK, TIN-LEAD
- IE = BLACK, SEL. GOLD
- GE = GREEN, TIN-LEAD
- EG = GREEN, SEL. GOLD

**CONSULT PCD FOR PART NO. AND AVAILABILITY OF FOLLOWING OPTIONS:**

- CUSTOM COLORS
- CUSTOM MARKING
- CUSTOM KEYING
- SELECTIVE CONTACT LOADING

****  
**RATINGS**

CURRENT - 15A  
VOLTAGE - 300V  
U.L. FILE NO. E83421

****  
**RATINGS**

CURRENT - PENDING  
VOLTAGE - PENDING  
CSA FILE NO. LR69703

DIN VDE 0627:1986  
DIN VDE 0110-1:1989  
EN 60947-1:1991  
EN 60947-7-1:1992

CURRENT - PENDING  
VOLTAGE - PENDING  
TUV FILE NO. 20396



**INSTALLATION RECOMMENDATIONS**



WIRE RANGE: AWG #14-26, STRANDED  
OR SOLID; AWG #12 STRANDED  
WIRE STRIP LENGTH: .310"  
TIGHTENING TORQUE: 7 LB-IN.

**MATERIALS:**

HOUSING: PPO, UL 94 V-0  
CONTACT: COPPER ALLOY, NICKEL FINISH  
SCREW: STEEL, NICKEL FINISH  
WIRE CLAMP: COPPER ALLOY, NICKEL FINISH


**MAX OPERATING TEMPERATURE:**  
105°C

<b>DIMENSIONS</b> ANSI Y14.5M UNITS: INCHES Pro/E FILE	<b>TOLERANCES</b> .XX ±0.01 .XXX ±0.005 ANGLES ±2.0°	<b>PROJECTION</b> 	<b>SPECIFICATION DRAWING</b> <hr/> ENGR D. MANTER 10-Dec-98			<b>TITLE</b> ELFK SERIES PLUG ASSEMBLY 45°	
ORIGINAL STAMPED IN RED	<i>THIS DOCUMENT CONTAINS  PROPRIETARY INFORMATION WHICH  IS THE CONFIDENTIAL PROPERTY  OF PCD, INC. PEABODY, MA, USA</i>		CHKD <hr/> APPD J. CAHALY 12/11/98	SIZE <b>A</b>	DWG NO. <b>ELFK02210</b>		REV <b>B</b>
			CODE: 58982	SCALE: NONE	SHEET 1 OF 2		

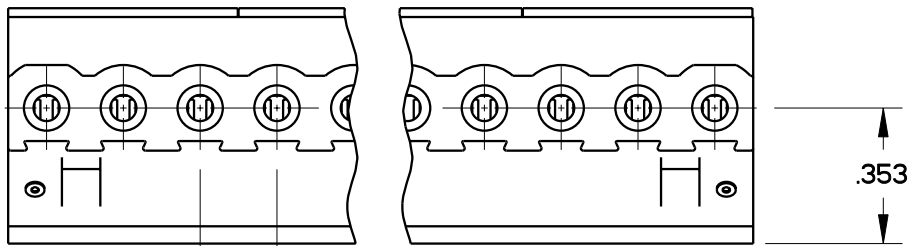
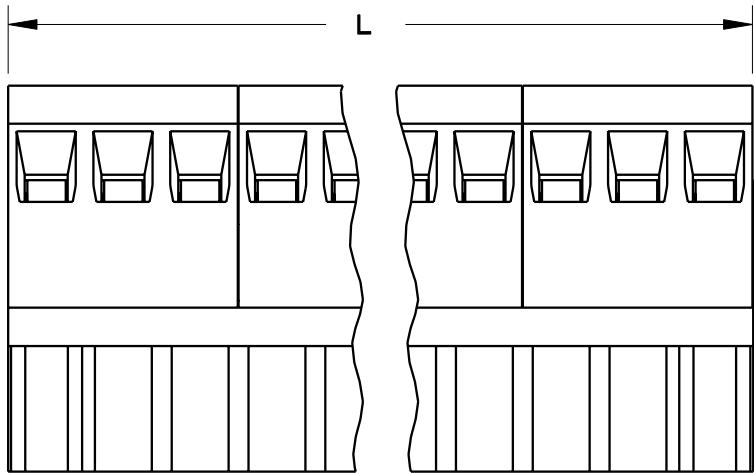


.200 TYP

2X .100  
2X .140

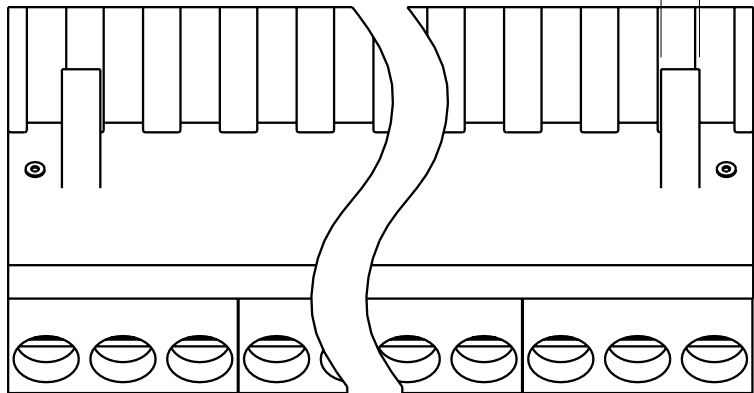

L=NUM OF POS X CL SPACING

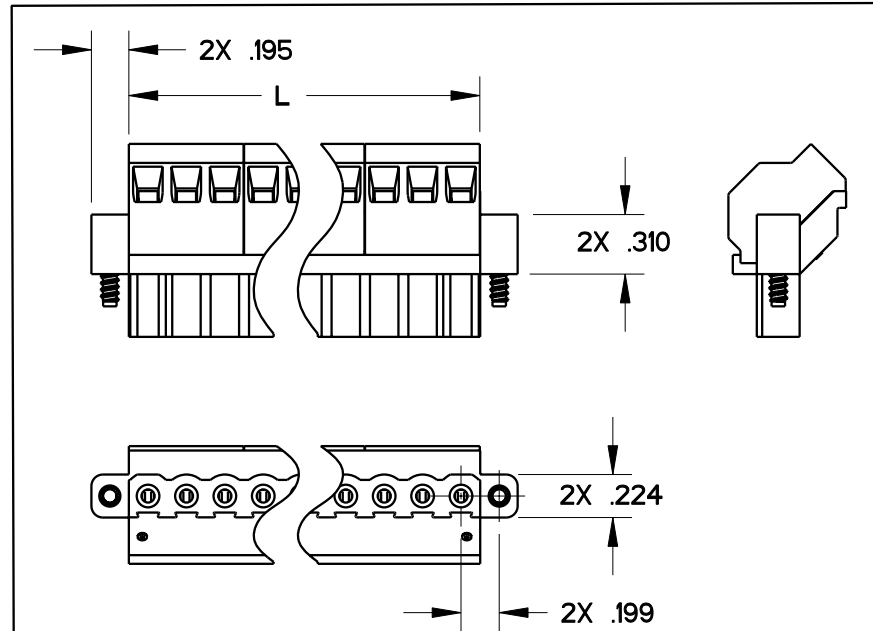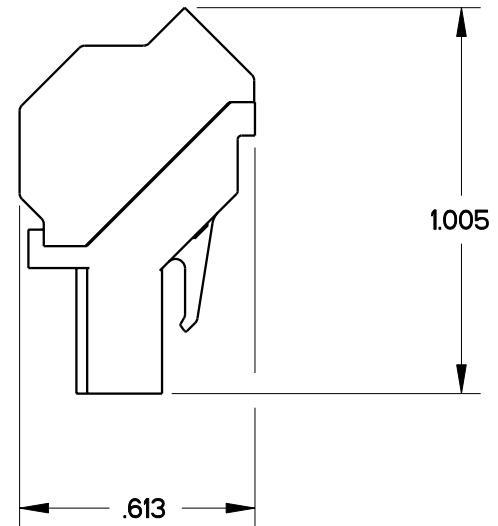

MOUNTING EARS CONFIGURATION

SIZE <b>A</b>	DWG NO. <b>ELFK02210</b>	REV <b>B</b>
CODE: 58982	SCALE: NONE	SHEET 2 OF 2