
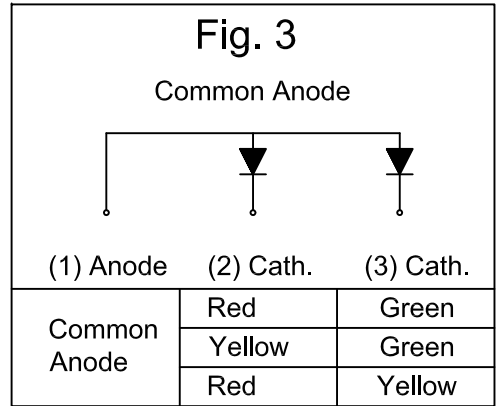
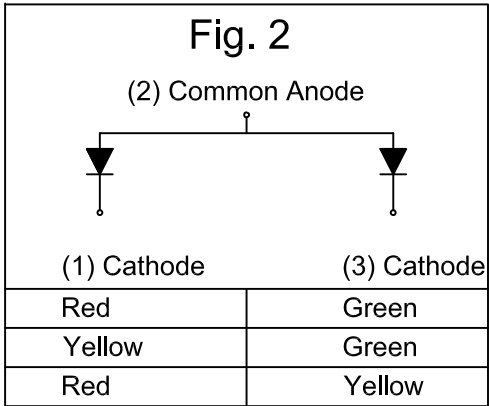
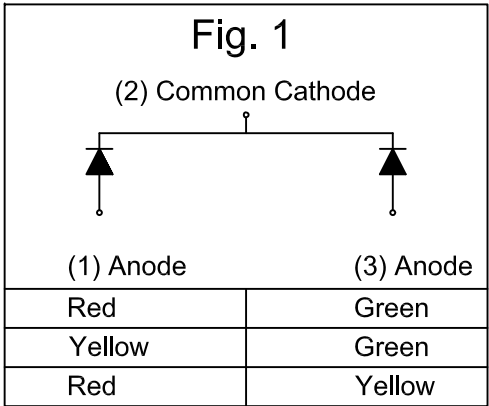
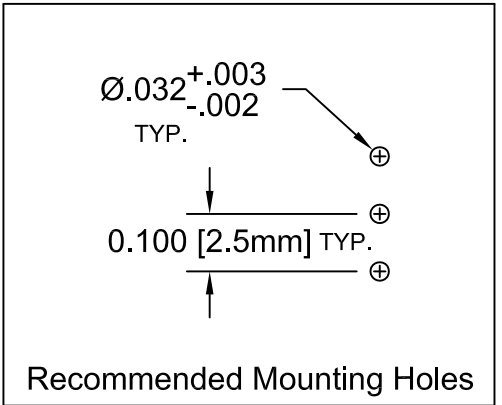



ITEM	Q'TY	PART NUMBER	PART DESCRIPTION
1	1	5BC-3-XXXX-F	T-1¼ (5mm) Bi-Color/Tri-Color LED, See Page 2
2	1	ELM 3-XXX	Extruded, Self-Retaining LED Spacer

REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Update w/o Changes	03/05/04	M. C.
B	Corrected Extruded to ELM3	11/28/05	M. C.
C	Removed Tolerance Note.	09/03/08	M. C.
D	Corrected P/N Typo in BOM.	09/25/13	M. C.

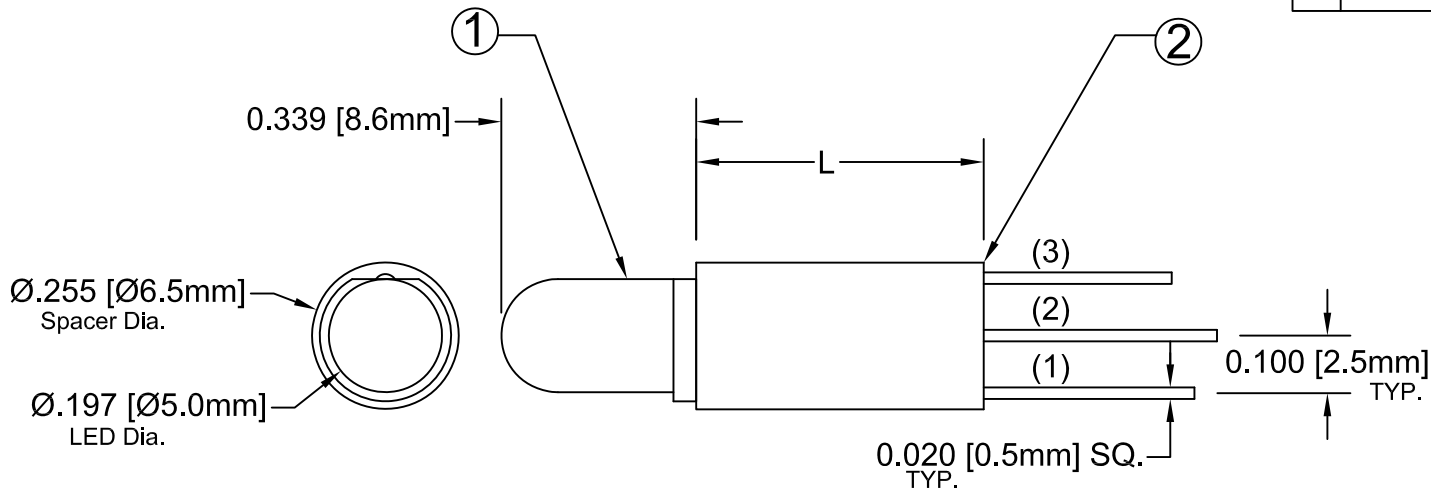


ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

REVERSE VOLTAGE	5V
REVERSE CURRENT	100uA
OPERATING TEMPERATURE RANGE	-25° C - 85° C
STORAGE TEMPERATURE	-30° C - 100° C
LEAD SOLDERING TEMPERATURE(1/16" FROM BODY)	260° C FOR 5 SECONDS

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
<u>DECIMALS</u>	<u>ANGULAR</u>	 TITLE: EXTRUDED VERTICAL T-1¼ (5mm) LED STANDARD SPACER PROFILE ASSY PART NO: ELM3XXX5BCXX REVISION: D	
.X ± .1	X° ± 1°		
.XX ± .02			
.XXX ± .010			
DESIGNED: Ty Yin	DATE: 03/05/04	CAGE CODE : 32559 SHEET # 1 OF 2	
CHECKED: D. Green	DATE: 03/05/04	CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.	

REV.	DESCRIPTION	DATE	APPROVED
	SEE SHEET#1.		

LED Assy. No.	Peak Wave Length λ_p (nm)	Emitted Color	Lens Appearance	Abs. Max. Ratin	Electro-Optical Data @ 20m A			Viewing Angle $2\theta \frac{1}{2}$ (Deg)	LED P/N
					Vf (V)		Iv (m cd)		
				If (mA)	TYP	MAX	TYP		
ELM3XXX5BC-3 (Fig. 1)	635	HE RED	WHITE DIFFUSED	30	2.0	2.6	35.0	40	5BC-3-F
	568	GREEN		30	2.2	2.6	35.0		
ELM3XXX5BC-3-YG (Fig. 1)	585	YELLOW	WHITE DIFFUSED	30	2.1	2.6	30.0	40	5BC-3-Y/G-F
	568	GREEN		30	2.2	2.6	35.0		
ELM3XXX5BC3CA (Fig. 2)	635	HE RED	WHITE DIFFUSED	30	2.0	2.6	35.0	40	5BC-3-CA-F
	568	GREEN		30	2.2	2.6	35.0		
ELM3XXX5BC3YGCA (Fig. 2)	585	YELLOW	WHITE DIFFUSED	30	2.1	2.6	30.0	40	5BC-3-Y/G-CA-F
	568	GREEN		30	2.2	2.6	35.0		
ELM3XXX5BC3-B (Fig. 3)	585	YELLOW	WHITE DIFFUSED	30	2.0	2.6	35.0	40	5BC-3-CA-B-F
	635	HE RED		30	2.2	2.6	35.0		
ELM3XXX5BC3YGB (Fig. 3)	585	YELLOW	WHITE DIFFUSED	30	2.1	2.6	30.0	40	5BC-3-Y/G-CA-B-F
	568	GREEN		30	2.2	2.6	35.0		

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED) <u>±10% ALL VALUES</u>		 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
ANGULAR X° ± 5°		 TITLE: EXTRUDED VERTICAL T-1¼ (5mm) LED STANDARD SPACER PROFILE ASSY	
DESIGNED: Ty Yin	DATE: 03/05/04	PART NO: ELM3XXX5BCXX	REVISION: D
CHECKED: D. Green	DATE: 03/05/04	CAGE CODE : 32559	SHEET # 2 OF 2
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.			