
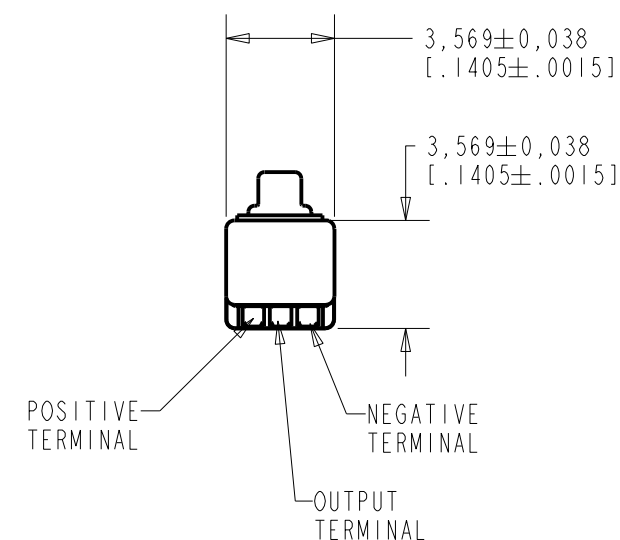
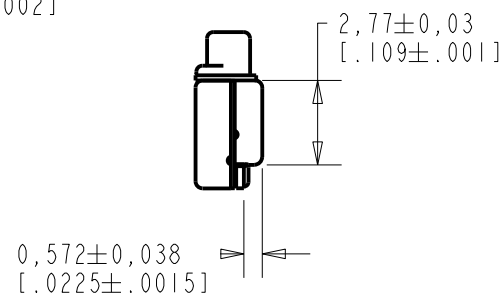
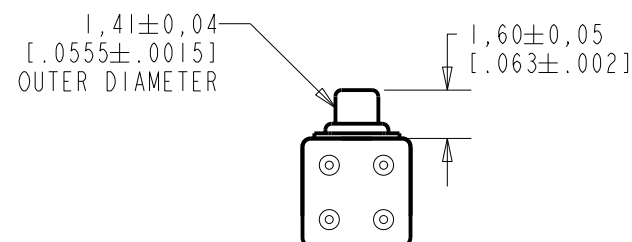


EM-24368-C23

SHT 1.1

NOTE:

1. INCREASED PRESSURE AT SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

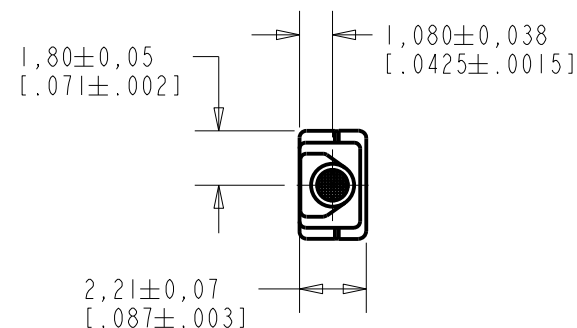


NOMINAL WEIGHT
.08 GRAM

DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
			Active	J
J	MI0105194	8-9-13		
SCALE: 4:1			DR. BY	DATE
DO NOT SCALE DRAWING			MMM	7-7-05
			CK. BY	DATE
TITLE: MICROPHONE			GJP	7-8-05
			APP. BY	DATE
OUTLINE DRAWING			GJP	7-8-05
EM-24368-C23				
SHT 1.1				

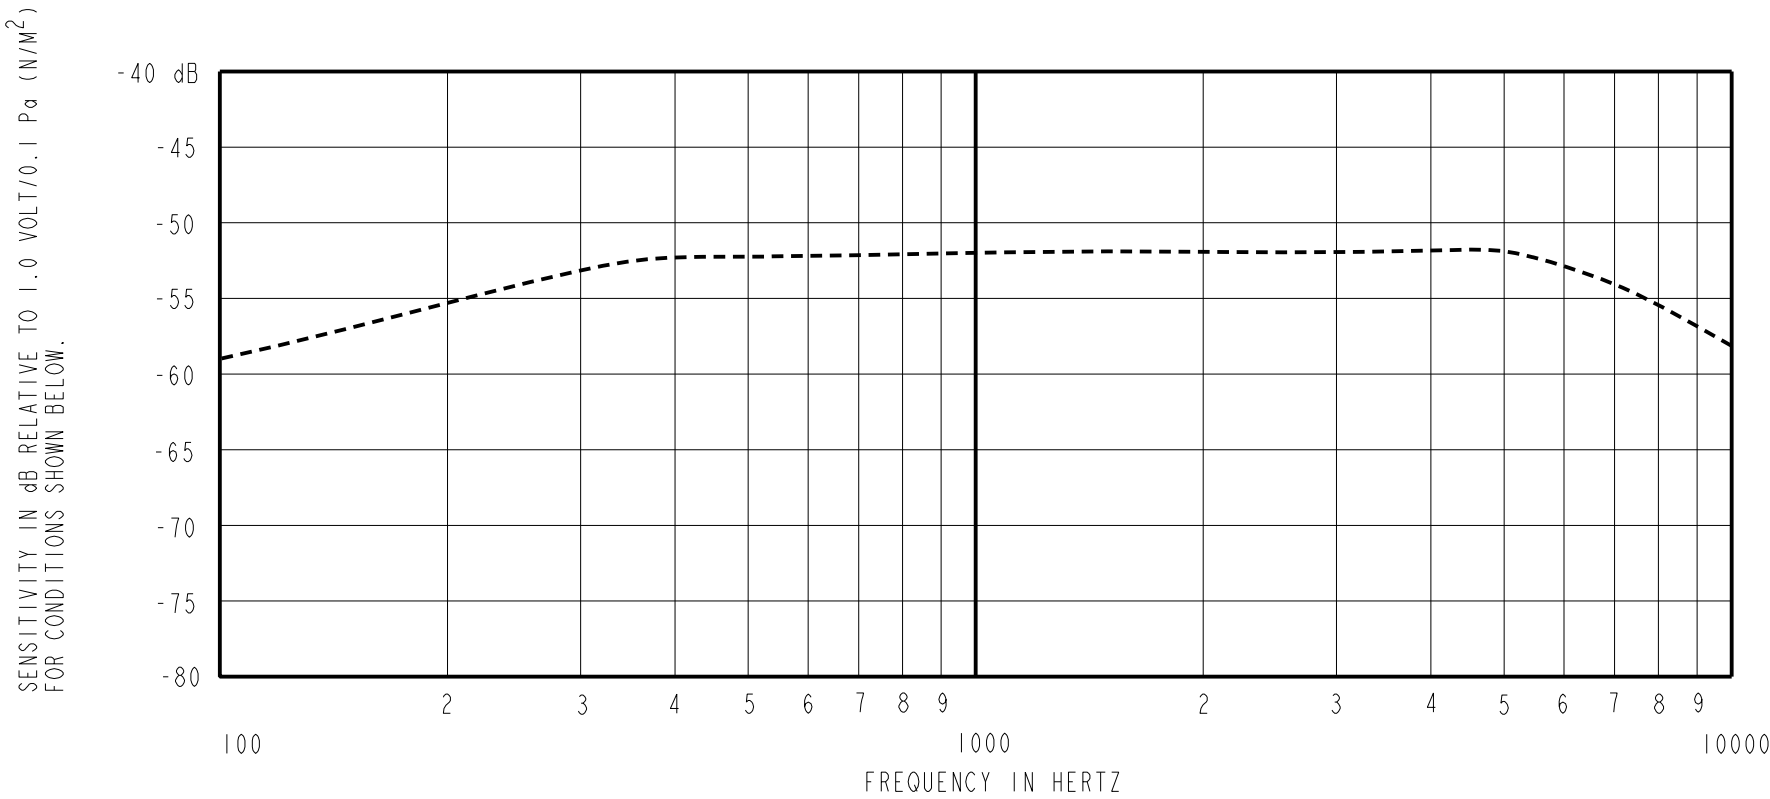

FREQUENCY	SENSITIVITY			DEVICE CONFORMITY	
	MIN.	NOM.	MAX.	RANGE OF DEVIATION FROM 1KHz	
100	---	-59.0	---	-10.0	-3.0
1000	-55.0	-52.0	-49.0	0.0	0.0
4800	---	-51.5	---	-3.0	+3.0

- NOTES:
- 1. CASE CONNECTED TO NEGATIVE TERMINAL.
 - 2. MICROPHONE TO BE FUNCTIONAL WITH 1.6 VDC SUPPLY.
 - 3. TYPICAL SENSITIVITY TO HUMIDITY AT 1000Hz IS 0.03 dB/%RH
 - 4. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
 - 5. CAPACITANCE MEASUREMENT MADE WITH BOONTON MODEL 7200 OR EQUIVALENT WITH APPLIED AC VOLTAGE OF 15 mVOLTS AT 1 MHz AND 0 VDC. INCLUDES CIRUICT CAPACITANCE IN PARALLEL WITH CAPACITOR.

PORT LOCATION	DC SUPPLY	AMPLIFIER CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC	"A" WEIGHTED NOISE (1 kHz EQUIV. SPL)	OUTPUT IMPEDANCE OHMS		
					MIN.	NOM.	MAX.
12S	1.3V	50 µA MAX.	3 dB MAX.	28.0 dB MAX.	2800	4400	6800

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
			Active		J
J	MI0105194	8-9-13			
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION				DR. BY	DATE
				MMM	7-7-05
				CK. BY	DATE
				GJP	7-8-05
				APP. BY	DATE
				GJP	7-8-05

TITLE:	MICROPHONE	EM-24368-C23
PERFORMANCE SPECIFICATION		SHT 2.1

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.